





Stainless Frame



Black Frame



Integrated Frame



Integrated Solid

Key Features

- Convection cooling system provides a quick cool down and consistent temperature
- Black interior
- LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV Light
- Stainless steel full-wrap door and handle (7/8" diameter)
- Stainless steel grille (stainless model), black metal grille (black & integrated models)
- Five, three-quarter extension, black wine racks

- Temperature range: 34°F to 60°F
- Digital touch pad control
- Bright white LED lighting
- Volume of 3.0 cu ft holds up to 24 wine bottles (750 ml)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs


Model Details

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHWC115-SG01A	115 / 60	Field Reversible	Stainless Frame	102 lb
UHWC115-BG01A	115 / 60	Field Reversible	Black Frame	102 lb
UHWC115-IG01A	115 / 60	Field Reversible	Integrated Frame	97 lb
UHWC115-IS01A	115 / 60	Field Reversible	Integrated Solid	92 lb




14 ½6" (379 mm) 28" (711 mm) 34 ½" to 35 ½" (867 mm to 892 mm)

Front




Side

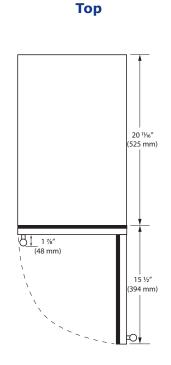


Specifications

Model	HWC115	
Amps: Running (115 v)	1.2 A	
Capacity: Wine Bottle (750 ml)	24	
Capacity: Volume (cu ft)	3.0	
Dimensions: Product Depth	22 ¹ / ₄ " / 562 mm	
Dimensions: Product Height	34 ½" / 867 mm	
Dimensions: Product Width	14 ¹⁵ / ₁₆ " / 379 mm	
ENERGY STAR (Glass)	No	
ENERGY STAR (Solid)	Tier 3	
Energy Consumption: Avg. Per Year	285 kWh	
Panel Height	30 ½" / 768 mm	
Panel Thickness	³ / ₄ " / 20 mm	
Panel Type	2 3/4" / 70 mm Frame or Solid Panel	
Panel Width	14 ¾" / 375 mm	
Refrigerant Type	R600a	
Sabbath (Star K Certified)	Yes	
Temperature Range	34°F to 60°F	

Back



Cabinet Cut-Out



Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



Installation Notes

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow









