


# LED DISPLAY LIGHTING

## For Sleek Shield™ Food Shields

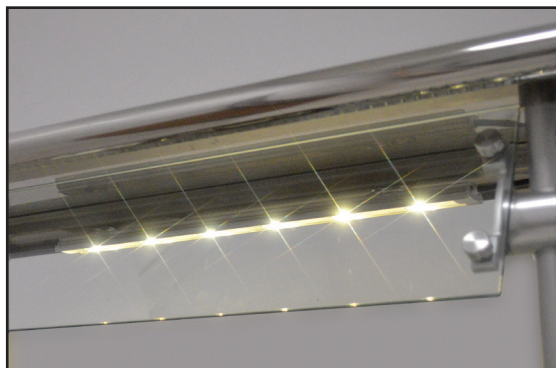

Item #: \_\_\_\_\_ Qty #: \_\_\_\_\_

Model #: \_\_\_\_\_

Project #: \_\_\_\_\_

### FEATURES:

Includes Class 2 Low Voltage Power Supply-120V-277V  
Natural Aluminum Finish  
(Black or White Finish Available Upon Request)  
Available for Stainless Steel Shelf Mounted or Glass Top Mounted

### CONSTRUCTION:

High Impact resistant Mounting Clips

### MATERIAL:

Aluminum Rail with Shatter-Proof Optics

**NOTE:** Shelves Require 6" clearance on both sides to fit above LED Lighting.  
5 amps per fixture regardless of length.

FACTORY INSTALLED ONLY • PRINT REQUIRED FOR PROPER LED LOCATION

#### Stainless Steel Shelf Mounted

MODEL #	Length (L)	Wt.
LED-S-12	12"	4 lbs.
LED-S-24	24"	5 lbs.
LED-S-36	36"	6 lbs.
LED-S-48	48"	7 lbs.
LED-S-60	60"	8 lbs.
LED-S-72	72"	9 lbs.

#### Glass Top Mounted

MODEL #	Length (L)	Wt.
LED-G-12	12"	4 lbs.
LED-G-24	24"	5 lbs.
LED-G-36	36"	6 lbs.
LED-G-48	48"	7 lbs.
LED-G-60	60"	8 lbs.
LED-G-72	72"	9 lbs.

## DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

