

# 600-CW Series Cold Food Drop-In Well

ALTO-SHAAM.

Safely hold cold food while maintaining food temperature and quality with Alto-Shaam cold wells. Cold wall, conductive cooling eliminates the need for forced air that degrades food quality. A digital thermostat holds food at the ideal temperature for any cold dish. Complete the look with complementing waterless round and hot food wells.



600-CW

## Standard features

- Cold wall drop-in refrigerated cold display pan
- Meets NSF Std. #7 for cold holding at 41°F [5°C] or below
- Digital thermostat provides cold holding temperature flexibility
- Exterior body is corrosion resistant steel
- Insulated with CFC free, foamed in place polyurethane
- Recessed, stainless steel ledge provided for supporting pans, adaptor bars included
- Stainless steel top and coved corner interior
- Dual air movement louver
- Condensing unit mounted on a swivel platform that allows for 90 degrees of rotation of intake/exhaust louver, giving the option of mounting the louver on any side
- Includes seven (7) 20" [508mm] pan divider bars

## Model (select one)

- 600-CW: Self-contained 1/4 hp compressor
- 600-CW/R: For use with a remote compressor

## Accessories

- Remote on/off switch; 8' [2438mm] extension [contact factory for cutout] [SW-35840]

## Pan divider bars

- 12" [305mm] for half-size/third-size pans [1014395]



CAPACITY

6  
12  
18


Six full-size or GN 1/1 pans  
Twelve half-size or GN 1/2 pans  
Eighteen third-size or GN 1/3 pans  
216 lb [97,8 kg] product maximum\*  
132 qt [126 L] volume maximum\*

\*Based on 6" [152mm] deep pans. Will also accept 2-1/2" [65mm] and 4" [102mm] deep pans.



# 600-CW Series

## Specification

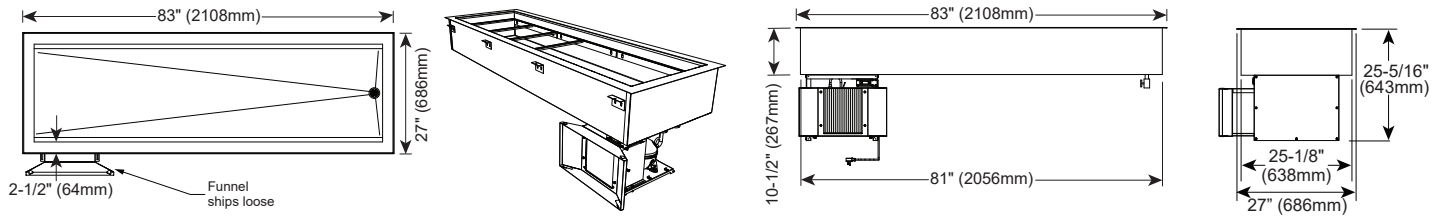

### DIMENSIONS

#### Exterior [H x W x D]

25-5/16" x 83" x 27" [643mm x 2108mm x 686mm]

#### Counter Cutout [L x W]

81-1/2" x 25-1/2" [2070mm x 648mm]

#### Net Weight

Contact factory

#### Ship Weight

Contact factory

#### Interior [H x W x D]

8-3/4" x 78" x 21-7/8" [222mm x 1981mm x 556mm]

#### Dual Air Movement Louver Cutout [H x W]

21-1/2" x 20-1/2" [546mm x 521mm]

#### Ship Dimensions [L x W x H]

Contact factory

Contact factory for 600-CW/R information.



### CHECK FIRST

- The countertop material must be water resistant.
- A distance of 3/4" [19mm] or more is required between the top rims of the wells to ensure easy cleaning.
- Appliance must be installed level.
- Appliance must not be installed in any area where it may be directly affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Appliance must not be installed under a hood.
- Avoid installing appliance under a 4-way ceiling diffuser.
- Outdoor use is not recommended.
- A water drain or water catch basin is required for appliance.
- LED lighting is recommended for overhead lighting.
- Requires R290 refrigerant.



### CLEARANCE

4" [102mm] in front of dual air movement louver



### ELECTRIC

600-CW	V	Ph	Hz	A	kW	Cord & Plug
115V	115	1	60	5.0	0.6	NEMA 5-15p 15A-125V plug 9' [229mm] long cord

#### Remote BTU Requirements

Low Temperature compressor: -10°F [-23°C] suction line  
BTU load: 1376\*

\*Does not include line run for remote compressor

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.

Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)