



**“WE MAKE THE KITCHEN BETTER!”**

Toll Free: 855-855-0399 Email: info@atosausa.com  
www.atosa.com | www.atosausa.com  
California, Colorado, Florida, Georgia, Illinois,  
Massachusetts, New Jersey, Ohio, Texas, Washington

# Countertop Refrigerated Display Cases - Curved / Square

## MODELS:

CRDC-35 / CRDC-46 / CRDS-42 / CRDS-56


### Standard Features

- Stainless steel exterior & interior with black frames
- Rear mount compressor with environmentally friendly R290 refrigerant
- Dixell digital controller
- Two(2) stainless steel shelves standard
- Defog feature to ensure the glass stays clear
- Maintains temperatures between 33°F – 41°F
- Magnetic door gasket(s) standard for positive door seal
- Two(2) rear sliding doors
- LED interior lighting
- Leveling legs
- NEMA 5-15 plug

CRDC-35




CRDC-46

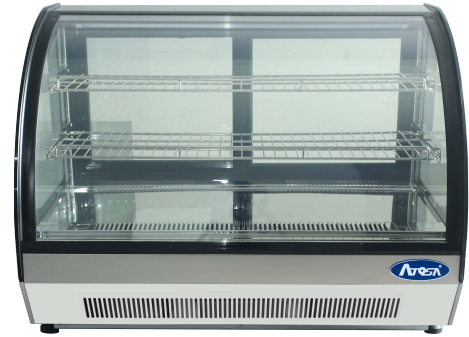

CRDS-42



CRDS-56

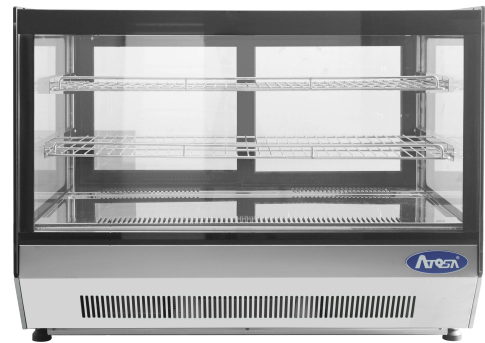

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38°F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



1 YEAR PARTS AND LABOR WARRANTY (US ONLY)  
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)





**"WE MAKE THE KITCHEN BETTER!"**

Toll Free: 855-855-0399 Email: info@atosausa.com  
 www.atosa.com | www.atosausa.com  
 California, Colorado, Florida, Georgia, Illinois,  
 Massachusetts, New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS

| Models  | Door | Capacity (Cu.Ft.) | Shelves | Amps(A) | Voltage (V/Hz/Ph) | HP  | Refrigerant | Exterior Dimensions (inch)                               | Net Weight (lbs) | Gross Weight (lbs) |
|---------|------|-------------------|---------|---------|-------------------|-----|-------------|--|------------------|--------------------|
| CRDC-35 | 2    | 3.5               | 2       | 2       | 115/60/1          | 1/5 | R290        | 27 <sup>3/5</sup> ×22 <sup>1/10</sup> ×26 <sup>2/5</sup> | 139              | 172                |
| CRDC-46 | 2    | 4.6               | 2       | 2       | 115/60/1          | 1/5 | R290        | 35 <sup>2/5</sup> ×22 <sup>1/10</sup> ×26 <sup>2/5</sup> | 154              | 200                |
| CRDS-42 | 2    | 4.2               | 2       | 2       | 115/60/1          | 1/5 | R290        | 27 <sup>3/5</sup> ×22 <sup>1/10</sup> ×26 <sup>2/5</sup> | 143              | 192                |
| CRDS-56 | 2    | 5.6               | 2       | 2       | 115/60/1          | 1/5 | R290        | 35 <sup>2/5</sup> ×22 <sup>1/10</sup> ×26 <sup>2/5</sup> | 165              | 214                |

## PLAN VIEW



LED lights

