

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## TOP MOUNTED CROSS-TEMP™®

MODELS: CT12-12HC-1HS

CT12-12HC Half Solid Door Variable Speed Freezer/Refrigerator Hydrocarbon Series



#### **OPTIONS & ACCESSORIES**

- Stainless steel exterior
- Stainless steel interior
- Glass door model
- Tray slide
- Additional shelves
- Left hand hinged

### 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior is stainless steel front with continuous coil coated sides
- Interior liner is made of corrosion resistant aluminum
- LED lighting
- Door locks standard (solid doors only)
- Expansion valve technology
- Easily converts from refrigerator to freezer
- Dual cabinet configurable to all menu initiatives, temperature range of -15 to 40° F
- Modulates coil temp to achieve desired set point
- Intuitive compressor
- Variable speed compressor technology achieve 30% more energy efficiency
- Quicker pull-down
- Improved product stability
- Two (2) epoxy coated shelves per section
- 6" Casters with (2) brakes

#### REFRIGERATIO N SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot Gas Condensate evaporation
- Adaptive defrost
- Epoxy coated evaporator coil


















3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



#### CT12-12HC-1HS **EXTERNAL DIMENSIONAL DATA** 26 5/8" Width Overall Depth Overall with Handle 34 5/8" 83 3/4" Height Overall Number of Doors 2 Depth with Door Open 90° 57 5/8" Door Opening (in) 21 1/2" x 24 5/8" INTERNAL DIMENSIONAL DATA NET Capacity (cubic ft.) (2) 9.0Internal Width Overall (in) 22 1/2" Internal Depth Overall (in) 26" Internal Height Overall (in) 26 11/16" Number or Shelves **ELECTRICAL DATA** Full Load Amperes 115/60/1 (2) 5.8 **REFRIGERATION DATA** Horsepower (2) 1/3Capacity (BTU/Hr)\* Variable Speed Technology **SHIPPING DATA** Gross Weight - Crated 475 lbs Height - Crated 87 1/2" Width - Crated 45 " Depth - Crated 35"

# **Cross Temp<sup>®</sup> Top Mount Refrigerators**

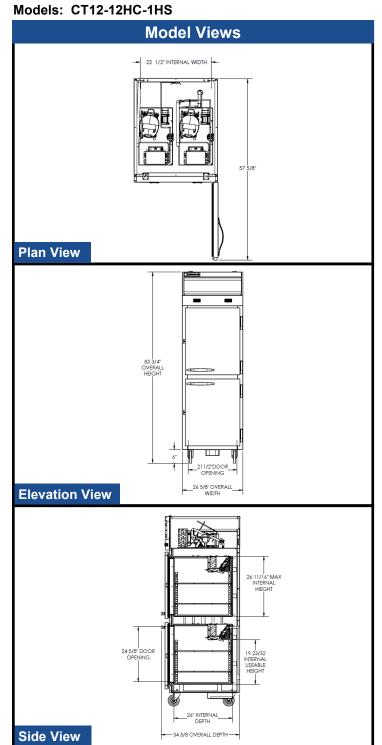

#### **ELECTRICAL CONNECTION**



Units pre-wired at factory and include (2) 8' long cord and plug set.











