

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P-SERIES TOP MOUNT ROLL-IN FREEZER

PFI1HC-1AS Solid Door Freezer **Hydrocarbon Series**

MODEL: PFI1HC-1AS



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front and side exterior (galvanized rear, back & bottom)
- · Interior liner is made of corrosion resistant aluminum
- Stainless steel door liner
- · Full electronic control
- · Expansion valve technology
- Self-closing door with 120° stay-open feature
- · 22 Gauge stainless steel door
- · LED interior light
- · Heavy-duty cylinder locks
- · Snap-in magnetic gaskets for positive door seal
- · Hinged front shroud
- Reinforced stainless steel door ramps outside and cart guides
- Accepts carts up to 26 3/8"(W) x 26"(D) x 64 1/2"(H) (cart not included)
- · Wiper gasket at bottom of door seals door to ramp
- · Energy saving thermal breaker
- · 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- · Stainless steel interior
- Door swing orientation (at time of order)

REFRIGERATION SYSTEM

- · Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Freezer capable of maintaining product temperature down to -10°F


















MODEL	PFI1HC-1AS
EXTERNAL DIMENSIONAL DATA	
Width Overall	36 ½"
Depth Overall with Handle	36 1/8"
Height Overall	84 3/8"
Between Cart Guides	26 ¾"
Number of Doors	1
Depth with Door Open 90°	65 ¾"
Door Opening (in)	27 %" x 65 %"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	34.86
Internal Width Overall (in)	31 1/4"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	66 1/4"
ELECTRICAL DATA	
Full Load Amperes 115/60/1*	9.1
REFRIGERATION DATA	
Horsepower	3/4
Capacity (BTU/Hr)	2450
SHIPPING DATA	
Gross Weight - Crated	435 lbs
Height - Crated	88"
Width - Crated	45"
Depth - Crated	41"

Top Mount Roll-in Freezer Model: PFI1HC-1AS

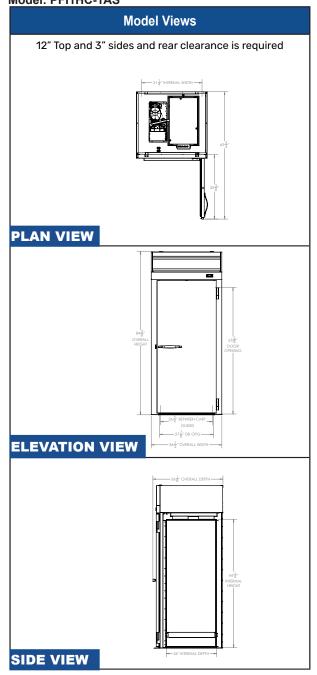

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug

 * NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.











