FORCED AIR MILK COOLERS

Model: MC5NSSD

Natural Refrigerant R-290 Model

58" Forced Air Milk Cooler Dual Access

Stainless steel exterior and interior, heavy-duty stainless steel lid(s), door hinges and latches with reinforced stainless steel floor. **Designed to keep milk cold during serving.**



Options and Accessories

(upcharge and lead times may apply)		
Wrap around bumpers	Color laminate	
Corner bumpers	Powder coating	
Floor foot pedal lock		

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Forced air, performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant¹ Built-in, electric condensate evaporator Easily serviceable, bottom-mounted compressor

CABINET ARCHITECTURE

2" high density, non-CFC polyurethane foamed-in-place insulation Snap-in lids and door gaskets Non-corrosive, heavy-duty, epoxy-coated steel wire floor racks Door cylinder security locks 5" swivel casters w/ front locking brakes

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm Floor drain Unique forced air flow curtain

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cu. ft.) 24 (680 cu l) Crate Capacity (13" x 13" x 11") 16 Crate Capacity (19" x 13" x 11") 10 Width, Overall (in.) 58 (1473 mm) Depth, Overall (in.) 33 (838 mm) Height, Overall (in.) (incl. 5" casters) 47 (1194 mm)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU/Hr)*	2870

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	7.6 (5.5)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)


SHIPPING DATA


Weight (lbs.)	580 (263 kg)
Height - Crated (in.)	56 1/4 (1429 mm)
Width - Crated (in.)	67 1/4 (1708 mm)
Depth - Crated (in.)	36 1/2 (927 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



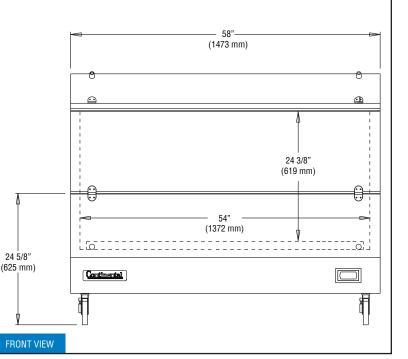

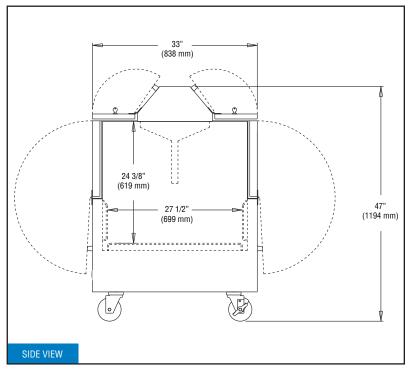

Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.