

### Features

- LED lighting
- Integrates with 24H Bianca and 24H Vertical
- Hydraulic Lift Up Top Glass
- Tempered Double Pane Front and Side Glass
- Stainless Steel Work Surface
- Steel Chassis Construction
- Insulated with Dense Non-CFCEcologic Polyurethane Foam
- Inside Structure Made of High Gloss 304 Stainless Steel
- Stainless Steel Work Surface
- Digital Diagnostic Control System with Programmable Defrosting
- Rear Plexiglass Sliding Doors (H40 and H60)
- Self-Contained, Air-Cooled Condensing Unit
- Unique Fan Assisted Airflow Design
- Humidity Control System
- Multiplexing Capability
- Temperature Range: +50° to +57°

### Options


- Three Heights: 33.79"(H20), 45.66"(H40) and 53.53"(H60)
- Available in Linear and Square 90 Degrees Designs
- Casters
- Granite Work Surface (Operator Side)
- Remote Condensing Unit
- Optional Front and Side Panels and RAL Custom Color Options




LA ROSSA Chocolate Display Case/Showcase features (3) lengths: 39.36" length without panels, 59.05" length without panels, 78.73" length without panels. They are insulated, self-contained, air cooled refrigeration, with tempered single pane heated glass front & double pane glass sides, hydraulic lift up top glass, LED lighting, rear plexiglass sliding doors, digital diagnostic control with programmable defrosting & removable stainless steel deck. They have 304 high gloss stainless steel interior, anodized aluminum construction, stainless steel work surface. Chocolate service merchandiser, bakery service merchandiser, and showcase without front & side panels are options.

Model No.	Application	Description	Height	Length	Depth	Crated Weight	Voltage	Amps
LAR-RPH20-C10-38-39	Chocolate	Humidity controlled 55%RH, deck only refrigerated with drawer	37.79"	39.36"	32.79"	689#	220/60/1	10
LAR-RPH20-C5-38-59	Chocolate	Humidity controlled 55%RH, deck only refrigerated with drawer	37.79"	59.05"	32.79"	845#	220/60/1	12
LAR-RPH40-C10-46-39	Chocolate	Humidity controlled 55%RH deck only and one non refrigerated shelf	45.66"	39.36"	32.79"	666#	220/60/1	10
LAR-RPH40-C15-46-59	Chocolate	Humidity controlled 55%RH, deck only and one non refrigerated shelf	45.66"	59.05"	32.79"	837#	220/60/1	12
LAR-RPH40-C20-46-79	Chocolate	Humidity controlled 55%RH, deck only and one non refrigerated shelf	45.66"	78.73"	32.79"	1009#	220/60/1	12
LAR-RPH60-C10-53-39	Chocolate	Humidity controlled 55%RH, deck only and two non refrigerated shelves	53.53"	39.36"	32.79"	723#	220/60/1	12
LAR-RPH60-C15-53-59	Chocolate	Humidity controlled 55%RH, deck only and two non refrigerated shelves	53.53"	59.05"	32.79"	837#	220/60/1	12
LAR-RPH60-C20-53-79	Chocolate	Humidity controlled 55%RH, deck only and two non refrigerated shelves	53.53"	78.73"	32.79"	1066#	220/60/1	12


### SIDE VIEW Detailed

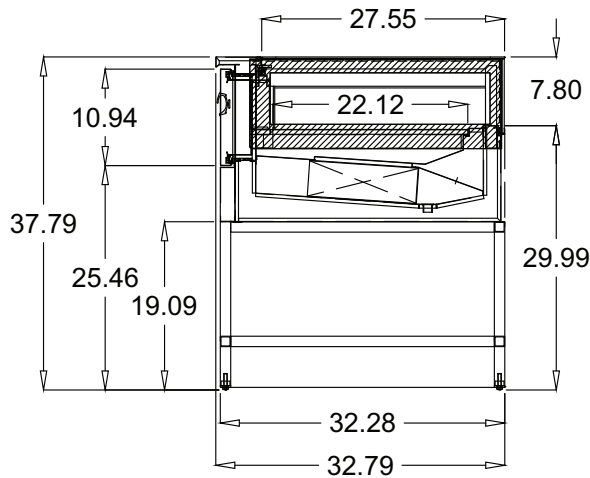

LAR-RPH20-C10-38-39  
LAR-RPH20-C5-38-59

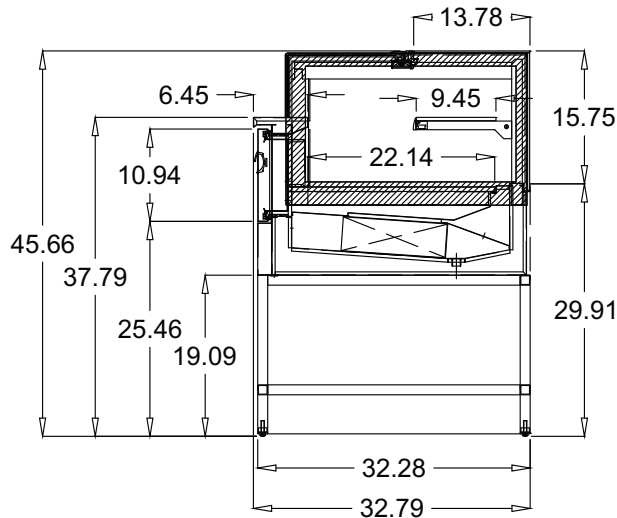

LAR-RPH40-C10-46-39  
LAR-RPH40-C15-46-59  
LAR-RPH40-C20-46-79

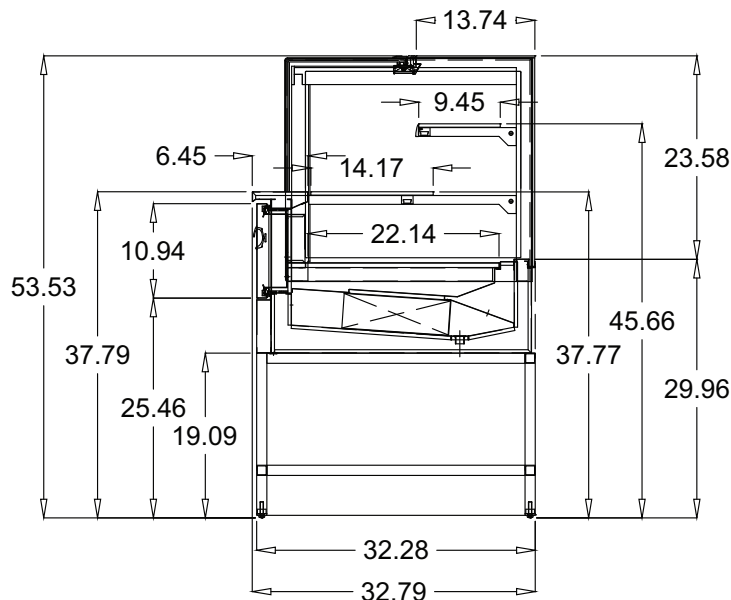

LAR-RPH60-C10-53-39  
LAR-RPH60-C15-53-59  
LAR-RPH60-C20-53-79

Required ambient conditions: 75°F;  
55% Relative Humidity  
Drawings and Specification are  
subject to change without notice.

**ELECTRICAL CONNECTION:**  
Display cases are shipped with  
applicable junction box for hardwired  
installation  
Options exist for several NEMA  
configurations  
Plug and/or receptacle  
configurations are at the discretion  
of the electrical installer





# Product Specification Sheet



## Model Style: LaROSSA - Chocolate

LAR-RPH20-C10-38-39    LAR-RPH40-C10-46-39    LAR-RPH60-C10-53-39  
 LAR-RPH20-C5-38-59    LAR-RPH40-C15-46-59    LAR-RPH60-C15-53-59



### PLAN VIEW

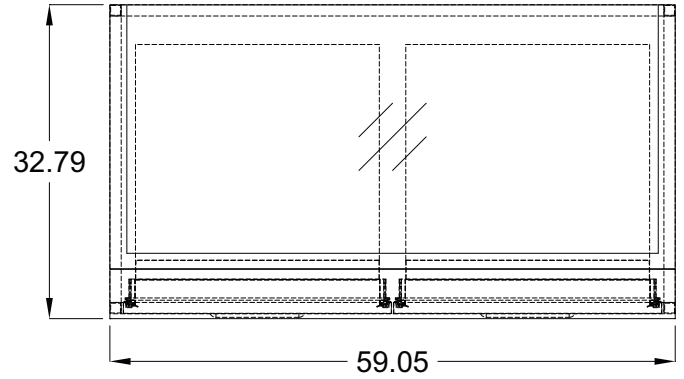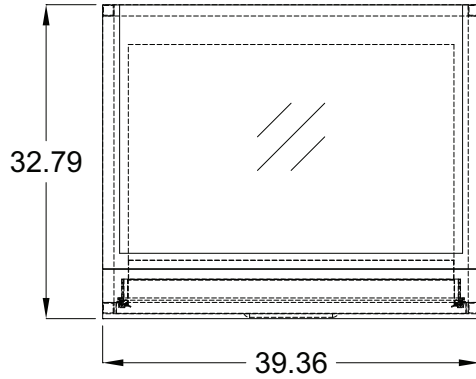

### REAR VIEW

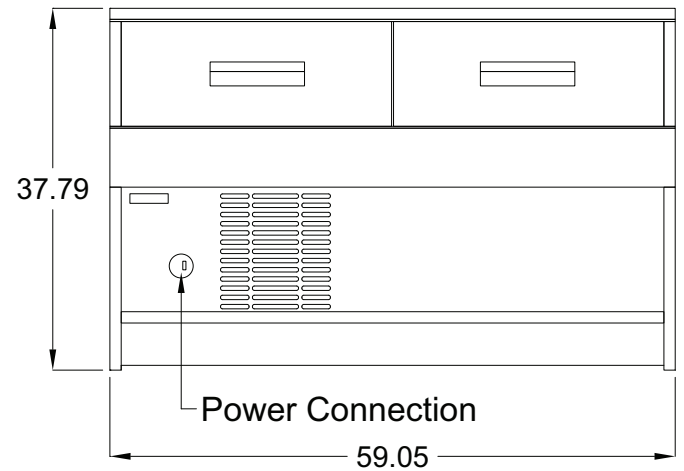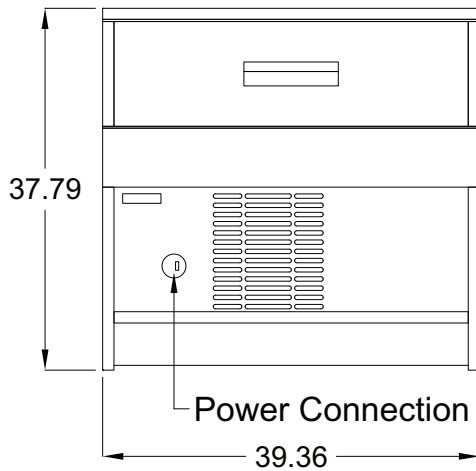

### FRONT VIEW

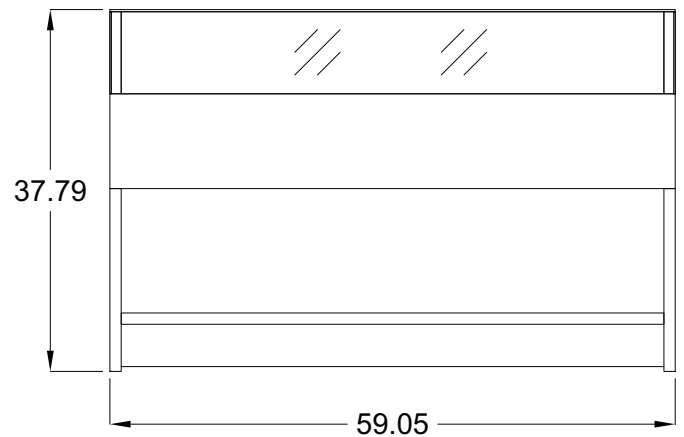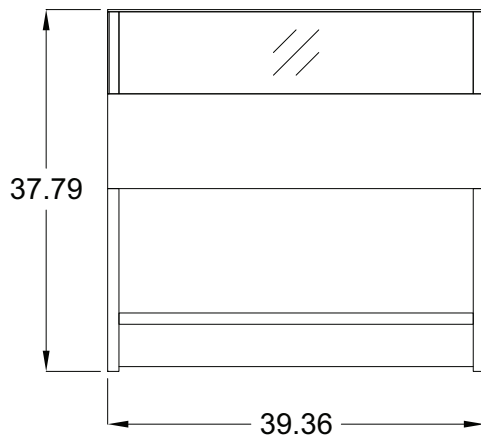

# Product Specification Sheet


## Model Style: LaROSSA - Chocolate

LAR-RPH20-C10-38-39  
LAR-RPH20-C5-38-59


LAR-RPH40-C10-46-39  
LAR-RPH40-C15-46-59

LAR-RPH60-C10-53-39  
LAR-RPH60-C15-53-59


### PLAN VIEW

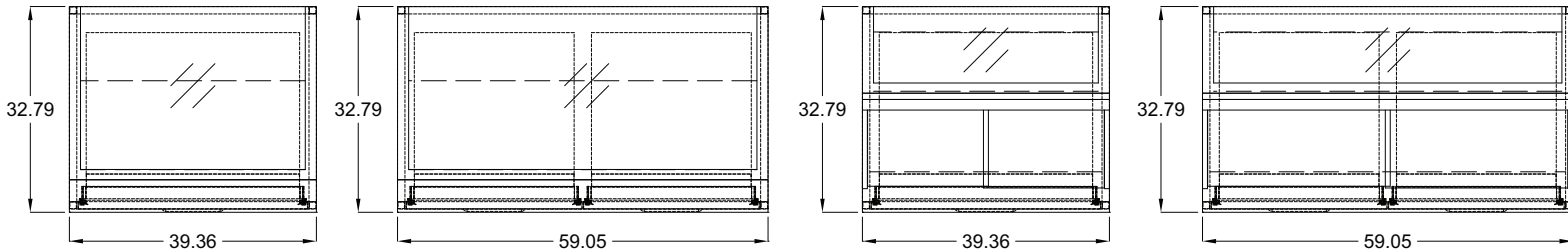

### FRONT VIEW

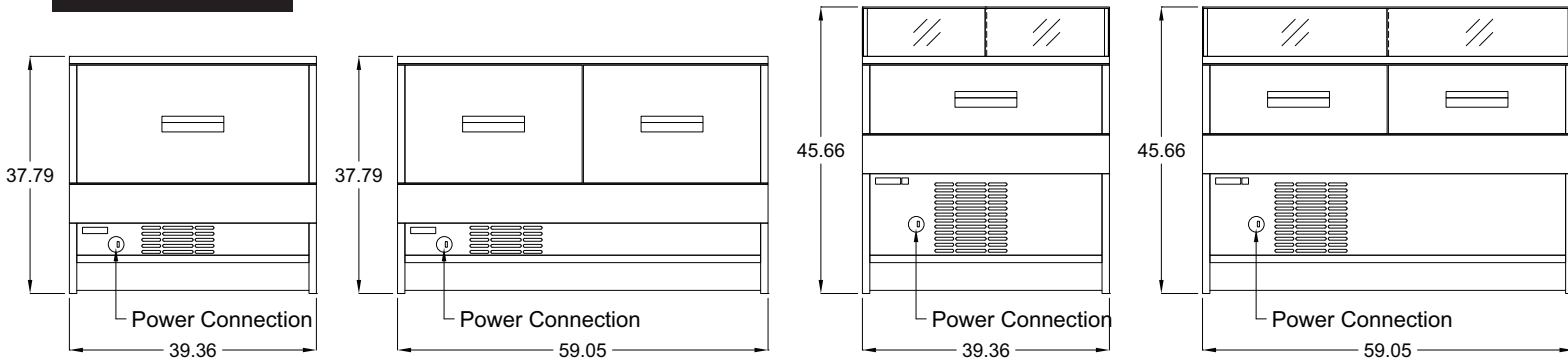

### REAR VIEW

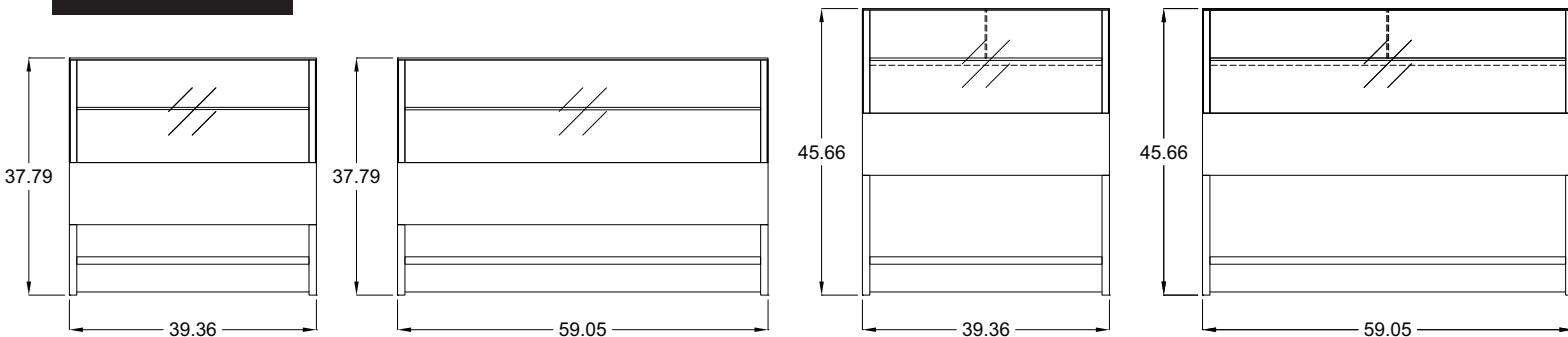

Required ambient conditions: 75°F; 55% Relative Humidity.  
Drawings and Specification are subject to change without notice.

**ELECTRICAL CONNECTION:**  
Display cases are shipped with applicable junction box for hardwired installation.  
Options exist for several NEMA configurations.  
Plug and/or receptacle configurations are at the discretion of the electrical installer.


**ORION by CLABO**

HMC Enterprises LLC, 831 East Cayuga Street, Philadelphia, PA. 19124 Ph: 1-800-344-8222 • 215-464-6800 • [www.ORIONbyClabo.com](http://www.ORIONbyClabo.com)


Revised 9/2018




### PLAN VIEW

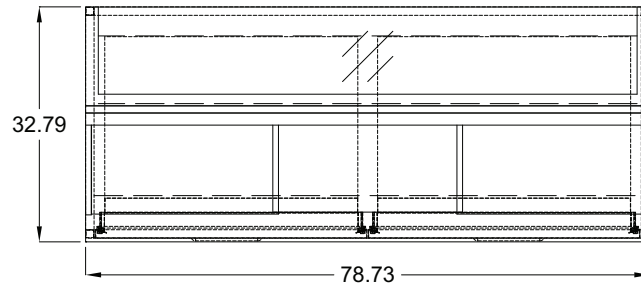

### REAR VIEW

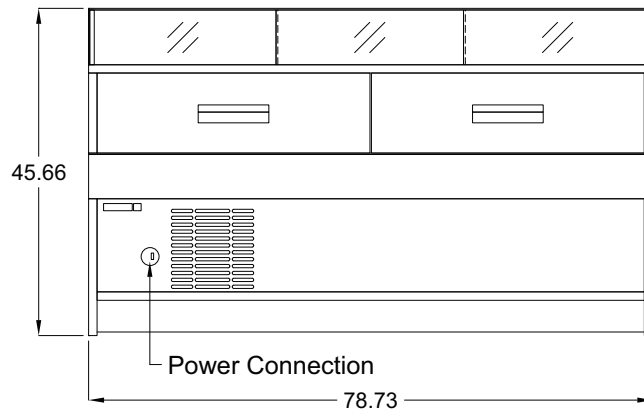

### FRONT VIEW

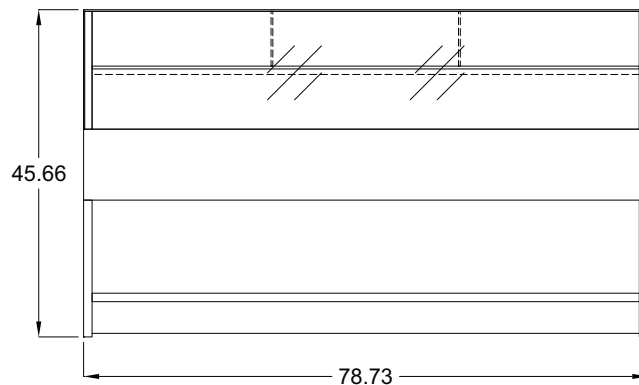

Required ambient conditions: 75°F; 55% Relative Humidity.  
Drawings and Specification are subject to change without notice.

**ELECTRICAL CONNECTION:**  
Display cases are shipped with applicable junction box for hardwired installation.  
Options exist for several NEMA configurations.  
Plug and/or receptacle configurations are at the discretion of the electrical installer.

**ORION by CLABO**

HMC Enterprises LLC, 831 East Cayuga Street, Philadelphia, PA. 19124 Ph: 1-800-344-8222 • 215-464-6800 • [www.ORIONbyClabo.com](http://www.ORIONbyClabo.com)

Revised 9/2018

