DISPLAY REFRIGERATOR

Model: 2RESNSGDHD

Natural Refrigerant R-290 Model

2-Section Extra-Wide Display Reach-In Refrigerator with Half Sliding Glass Doors - Shallow Depth

2RESNSGDHD - Stainless steel front, aluminum end panels and interior **2RESNSASGDHD** - Stainless steel exterior, aluminum interior **2RESNSSSGDHD** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Wine rack	
Add'l epoxy-coated steel shelves	Adjustable legs	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Heavy-duty pilaster strips		

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant¹ Automatic, electric condensate evaporator Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation Double-pane, tempered sliding glass doors Self-closing doors Snap-in door wipers Door locks Heavy-duty, epoxy-coated steel shelves High efficiency Black PVC frames 5" casters

MODEL FEATURES

LED interior lighting Electronic controller w/digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA 40 (1133 cu l) Net Capacity (cu. ft.) Width, Overall (in.) 57 (1448 mm) Depth, Overall (in.) (incl. grill) 27 7/8 (708 mm) Depth (in.) (less grill) 25 7/8 (657 mm) Clear Door Width (in.) 21 7/8 (556 mm) Clear Half Door Height (in.) 26 7/8 (699 mm) Height, Overall (in.) (incl. 5" casters) 82 1/4 (2089 mm) No. of Doors 4 No. of Shelves 8 Shelf Area (sq. ft.) 44.5 (4.1 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU/Hr)*	2560

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	7.9 (5.1)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu l)
Weight Std - Crated (lbs.)	460 (209 kg)
Weight SS - Crated (lbs.)	460 (209 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Refrigerator



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579


539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.





MADE IN THE U.S.A.

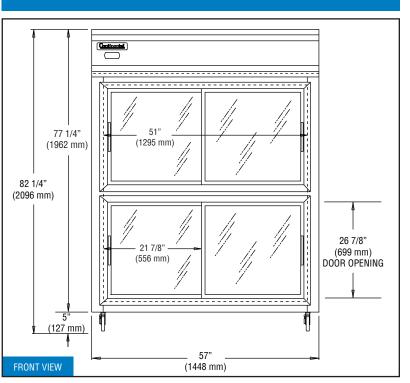

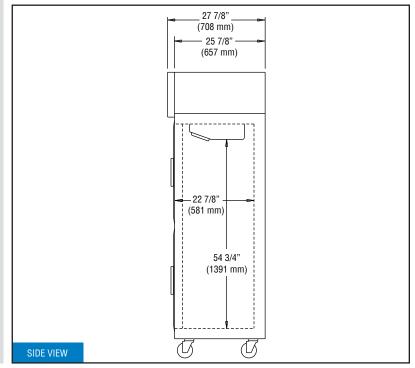

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.