DESIGNER LINE DISPLAY REFRIGERATOR

Model: D2RENSGDHD


Natural Refrigerant R-290 Model



2-Section Extra-Wide Display Reach-In Refrigerator with Half Sliding Glass Doors

D2RENSGDHD - Stainless steel front, aluminum end panels and interior **D2RENSASGDHD** - Stainless steel exterior, aluminum interior

D2RENSSSGDHD - Stainless steel exterior and interior





Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Wine rack
Add'l epoxy-coated steel shelves	Casters
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Pan slide assemblies	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Double-pane, tempered sliding glass doors

Self-closing doors

Snap-in door wipers

Door locks

Heavy-duty, epoxy-coated steel shelves

High efficiency Black PVC frame

Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Dimensional Data	
Net Capacity (cu. ft.)	52 (1472 cu I)
Width, Overall (in.)	57 (1448 mm)

Depth, Overall (in.) (incl. grill) 34 (mm) Depth (in.) (less grill) 32 (813 mm)

Clear Door Width (in.) 21 7/8 (556 mm)

Clear Half Door Height (in.) 26 7/8 (683 mm)

Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm)

No. of Doors 4 No. of Shelves 8

Shelf Area (sq. ft.) 40.8 (3.8 sq m)

Tray Slide Capacity (per half section)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+	
Capacity (BTU/Hr)*	2560	

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	6.3 (3.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu I)
Weight Std - Crated (lbs.)	585 (265 kg)
Weight SS - Crated (lbs.)	665 (302 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

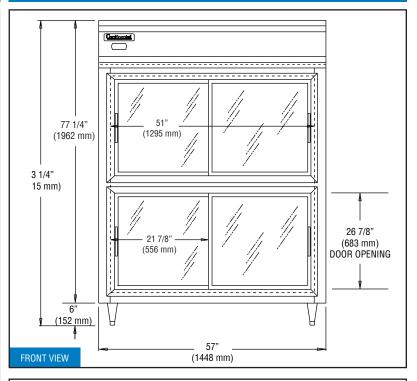

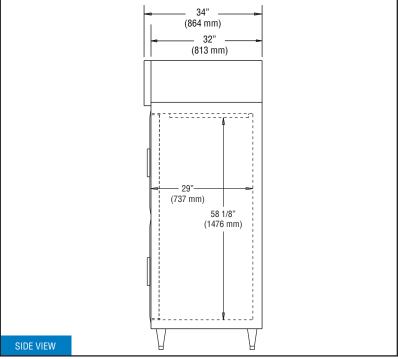

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.