# DESIGNER LINE REFRIGERATOR

### Model: D3RNPT



## 3-Section Pass-Thru Refrigerator

D3RNPT - Stainless steel front, aluminum end panels and interior D3RNSAPT - Stainless steel exterior, aluminum interior D3RNSSPT- Stainless steel exterior and interior



#### **Options and Accessories**

(upcharge and lead times may apply)		
Add'l epoxy-coated steel shelves	Hinged glass doors (consult factory)	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Rehinging of doors (consult factory)	Correctional Facility Options	
Pan slide assemblies	One way security screws	
Wine rack	• Locking hasp (lock not included)	
Casters	Stainless steel mesh cover	
Custom laminates	Coverless hinges	
Half doors		

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

### **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance-rated "plug" refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup> Refrigeration system is readily accessible on top of cabinet, separate from the "food zone" Automatic, hot gas condensate evaporator Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation	
Smooth, polished chrome workflow door handles	
Cam action, lift off hinges	
Self-closing doors	
Magnetic snap-in door gaskets	
Cylinder lock in each door	
Heavy-duty, epoxy-coated steel shelves	
Heavy-duty pilaster strips	
Adjustable 6" stainless steel legs	

#### **MODEL FEATURES**

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

#### **Model Specifications**

#### **DIMENSIONAL DATA** 72 (2039 cu l) Net Capacity (cu. ft.) Width, Overall (in.) 78 (1981 mm) 38 3/4 (984 mm) Depth, Overall (in.) (incl. handles) Depth (in.) (less doors) 32 (813 mm) Depth (in.) (doors open 90°) 79 (2007 mm) Clear Door Width (in.) 19 3/8 (492 mm) Clear Door Height (in.) 58 5/8 (1489 mm) Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm) No. of Doors 6 No. of Shelves 9 Shelf Area (sq. ft.) 61.2 (5.7 sq m) Tray Slide Capacity (per section) 24

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	4010

#### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	11.6 (5.3)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	187 (5295 cu l)
Weight Std - Crated (lbs.)	825 (374 kg)
Weight SS - Crated (lbs.)	865 (392 kg)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Intertek





**Model Plan Views** 

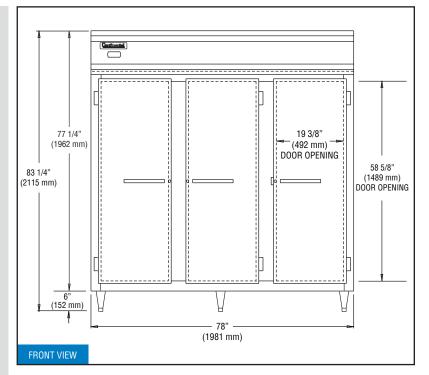

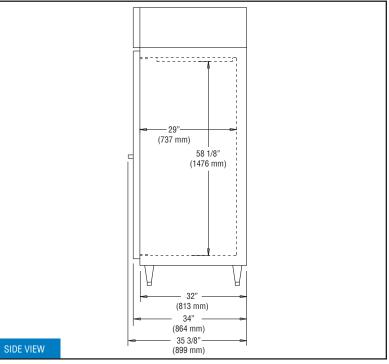

**IMPORTANT NOTE:** If the cabinet is located under a low ceiling, a <u>minimum clearance of 12" is required on</u> top and 3" on sides.