DUAL TEMP REFRIGERATOR/FREEZER

Model: 2RFNHD

Natural Refrigerant R-290 Model

2-Section Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F) with Half Doors

2RFNHD - Stainless steel front, aluminum end panels and interior

2RFNSAHD - Stainless steel exterior, aluminum interior

2RFNSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Shallow depth (consult factory)	
Add'l epoxy-coated steel shelves	Hinged glass doors	
Chrome or stainless steel shelves	Increased refrigeration systems (consult factory)	
Heavy-duty pilaster strips	Special electrical req. (consult factory)	
Pan slide assemblies	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Wine rack (refrigerator section)	Locking hasp (lock not included)	
Adjustable legs	Stainless steel mesh cover	
Custom laminates	Coverless hinges	
Pass-Thru (consult factory)		

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
model openion	
Location:	
Item No:	Quantity:
nom no.	quantity.
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance-rated refrigeration systems

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Freezer section: standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controllers w/digital display & hi-low alarm
Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	20/20 (566/566 cu I)
Width, Overall (in.)	52 (1321 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	55 1/2 (1410 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Half Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	82 1/4 (2089 mm)
No. of Doors	4
No. of Shelves	6
Shelf Area (sq. ft.) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section)	11
DEEDICED ANT DATA	

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4+, 1/2
Capacity (BTU/Hr)*	1940 / 1590

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3/3
Total Amps (int'l)	5.2 (3.5) / 7.6 (5.2)
Defrost Amps (int'l)	4.4 (3.2)
(2) 10 ft. Cord/Plug [attach.] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu I)
Weight Std - Crated (lbs.)	580 (227 kg)
Weight SS - Crated (lbs.)	700 (318 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient (refrigerator)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with two NEMA-5-15P Plugs (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

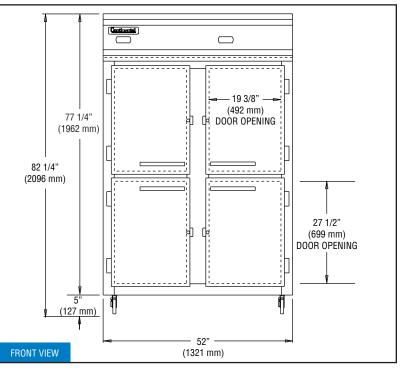

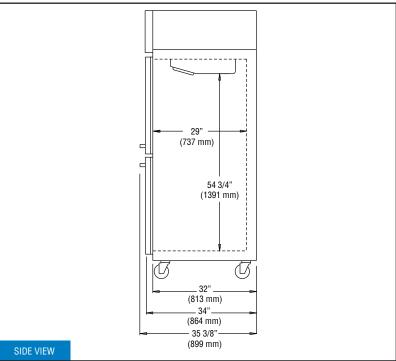

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

^{*} Rating @ -15°F evaporator, 90°F ambient (freezer)