

# BACK BAR EQUIPMENT

## Model: BB59SNGD

Natural Refrigerant R-290 Model

### 59" Back Bar Display Cooler with Hinged Glass Doors Shallow Depth

Textured baked black enamel finish exterior, stainless steel countertop, interior back and side panels with reinforced stainless steel floor.



### Options and Accessories

(upcharge and lead times may apply)

|   |                          |
|---|--------------------------|
| Add'l epoxy-coated shelves                          | Condensing unit on right |
| Stainless steel shelves                             | Wine rack                |
| Food storage rated stainless steel interior (NSF-7) | Casters or legs          |
| Riser base* (field installed)                       |                          |

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2"

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### REFRIGERATION SYSTEM

Performance-rated front breathing refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

#### CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Double pane, tempered low-e hinged glass doors

Front, rear and side venting louvered grills

Magnetic snap-in door gaskets

Cylinder-keyed security lock in each door

Stainless steel reinforced threshold

#### MODEL FEATURES

Low profile cabinet design

Electronic controller w/digital display & hi-low alarm

LED interior lighting

Easily accessible and serviceable slide-out condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
www.continentalrefrigerator.com

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|   |                 |
|---|-----------------|
| Net Capacity (cu. ft.)                            | 15 (425 cu l)   |
| Width, Overall (in.)                              | 59 (1499 mm)    |
| Depth, Overall (in.)<br>(incl. handles & bumpers) | 24 5/8 (625 mm) |
| Depth, Body Only (in.) (less doors)               | 21 (533 mm)     |
| Height, Overall (in.)                             | 34 3/4 (883 mm) |
| Capacity: # Barrel Kegs                           | 2               |
| Capacity: # Straight Wall Kegs                    | 2               |
| Capacity : # 1/6 Size Kegs                        | 8               |
| No. of Doors                                      | 2               |
| No. of Shelves                                    | 4               |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4  |
| Capacity (BTU/Hr)*          | 2025 |

### ELECTRICAL DATA

|                                     |                     |
|-------------------------------------|---------------------|
| Voltage (int'l)                     | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground)           | 3                   |
| Total Amps (int'l)                  | 3.7 (3.4)           |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No)            |

### SHIPPING DATA

|                       |              |
|-----------------------|--------------|
| Weight (lbs.)         | 395 (179 kg) |
| Height - Crated (in.) | 46 (1168 mm) |
| Width - Crated (in.)  | 65 (1651 mm) |
| Depth - Crated (in.)  | 42 (1067 mm) |



\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

## Model Plan Views

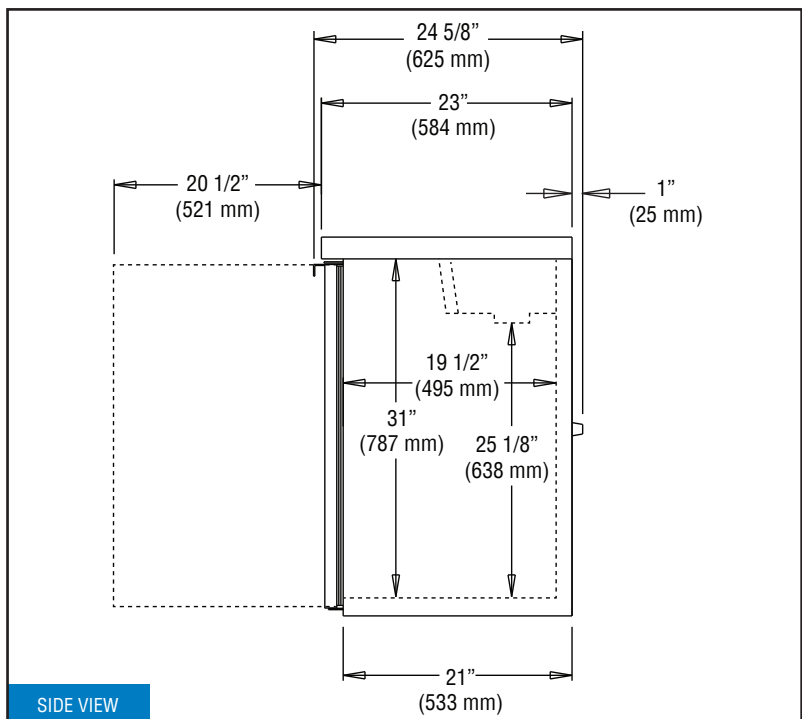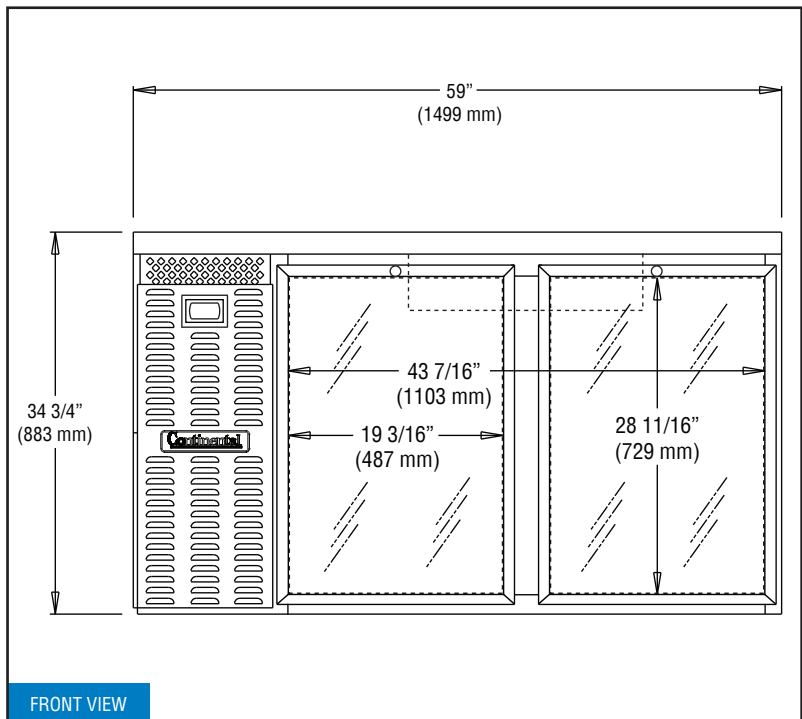

**IMPORTANT NOTE:** Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet **must** not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Intertek



MADE IN THE U.S.A.

© Copyright 2019. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.