






Panel Thermometers

When your cabinet and/or enclosure requires fast and accurate temperature readings the DM120 and DM450 Series are the best choice. With the removable lens, battery replacement is easy.

Features




- 2" diameter polycarbonate lens
- Stainless steel with bright buffed finish
- 1.5 volt battery #393
- Flange with (3) .156" diameter holes equally spaced on a 2.625" diameter bolt circle

Mounting Dimensions DM120S/DM450S

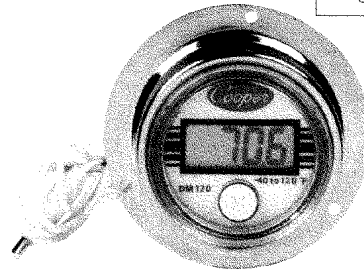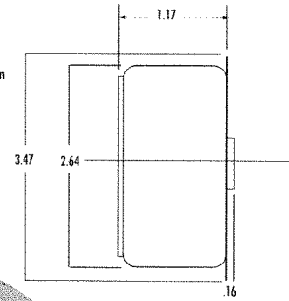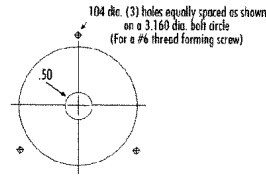


Model DM120S

Mounting Dimensions DM120/DM450

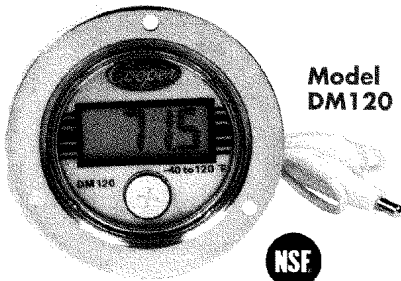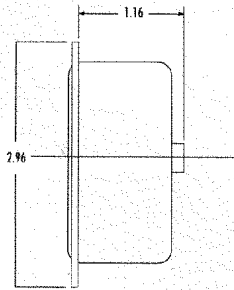

Model DM120

Model DM450

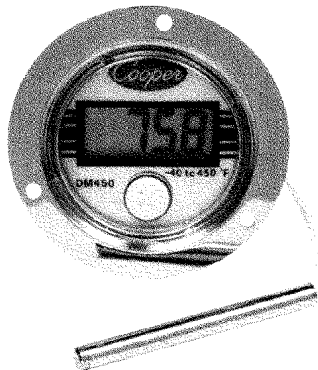

MODELS: DM120, DM120S, DM120CS, DM450, DM450S

Specifications:

Instrument Range	DM120/DM120S - -40° to 120°F DM120CS - -40° to 50°C DM450/DM450S - -40° to 450°F
Resolution	0.1°F
Accuracy	DM120 Series - ±0.2°F -4 to 77°F or ±4°F max. over entire range DM450 Series - ±2% of reading
Ambient Range	15° to 150°F
Humidity Range	0 to 90% non-condensing
Sensor Type	Thermistor (copper wire leads can be extended to 8')
Lens/Display	2" diameter acrylic lens and 0.5" display
Lead Length	39"
Mounting	DM120/DM450 - Front flange DM120S/DM120CS/DM450S - Back flange, surface mount
Weight	6 oz
Display	Indications
Flashing HHH/Hi	Shorted probe or above maximum temperature
Flashing LLL/Lo	Open probe or below minimum temperature