



# Save-T Air Curtains

## Model: S-LP Low Profile Commercial For Climate and Environmental Control on Openings up to 10' high


### PRODUCT DATA Variable Speed

Model	S-LP-30-1	S-LP-36-1	S-LP-42-1	S-LP-48-1	S-LP-60-1	S-LP-72-2	S-LP-84-2	S-LP-96-2	S-LP-108-2	S-LP-120-2
Nozzle Width Inches	29	35	41	47	59	71	83	95	107	117
Max. FPM at Nozzle	3100	3100	3100	3100	3100	3100	3100	3100	3100	3100
Avg. FPM at Nozzle	2100	2200	2150	2100	1985	2200	2150	2100	2200	2175
CFM at Nozzle	925	1215	1380	1545	1820	2425	2760	3095	3640	3970
Outlet Uniformity	92%	95%	95%	92%	92%	95%	95%	95%	95%	95%
Number of Motors	1	1	1	1	1	2	2	2	2	2
Horse Power	1/5	1/5	1/5	1/5	1/5	1/5	1/5	1/5	1/5	1/5
Weight (Lbs)	45	55	65	85	95	105	120	125	145	160

Sound Level: 53 dba  
 Sound level measured 10 feet from the unit in a free field based on a one motor unit.

Single Phase Motor Voltage Available: **120 208/230**  
 Amp Draw Per Motor: **4.4 2.0**

**NOTE: Motors not available in higher voltages. If unit is to be ran on 480 or 575 volts, a remote step down transformer will be required.**

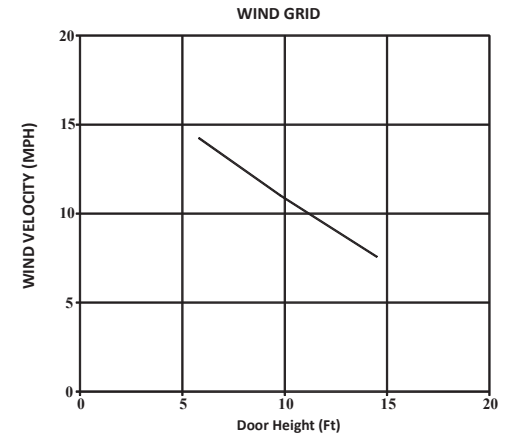

TMI, LLC  
 5350 Campbells Run Road • Pittsburgh, PA 15205  
 Toll Free: 1-800-888-9750 • Local: 412-787-9750 • Fax: 412-787-3665  
 Web: [www.tmi-pvc.com](http://www.tmi-pvc.com)