DESIGNER LINE FISH FILE

Model: D2RSNSS-F



2-Section Upright Fish File

Specially designed for the storage of fresh fish packed in crushed ice in drawer pans supplied with unit.

#300 Series stainless interior, stainless steel exterior.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel back	Special electrical requirements (consult factory)
Casters	Drawer locks

Consult factory for other model configurations, options and accessories

Project Name:	
Model Specified:	
товог орошнов.	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant1

Automatic, electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Stainless steel, easy glide roll-out drawers on heavy-duty drawer track

Smooth, polished chrome drawer handles

Magnetic snap-in drawer gaskets

Adjustable 6" stainless steel legs

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

1" diameter cleanout drain

(requires provisions for floor drain)

Fully welded, non-corrosive stainless steel pan per drawer w/built-in drain tubes and ice grates (drain into gutter)*

Anti-sweat drawer facia heaters

- ¹ R-290 refrigerant meets all federal and state regulatory requirements.
- * Each drawer has a removable pan, with a drain tube at the back corner. Water from melting ice in the pan, along with moisture from the product, drains out the storage pan through the tube, a long a trough on the interior cabinet wall, down the sloped interior bottom, and out the cabinet through a 1" drain tube.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	32 (906 cu I)
Width, Overall (in.)	52 (1321 mm)
Depth, Overall (in.) (incl. handles)	29 1/4 (743 mm)

83 1/4 (2115 mm)

No. of Drawers 8

Height, Overall (in.) (incl. 6" legs)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU/Hr)*	2560

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	7.5 (5.0)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu I)
Weight SS - Crated (lbs.)	710 (322 kg)

DRAWER PAN CONFIGURATIONS

(1) 15 $5/8 \times 20 \times 6$ pan per drawer (8 pans supplied) (can accommodate 12 $\times 20$ perforated pans)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

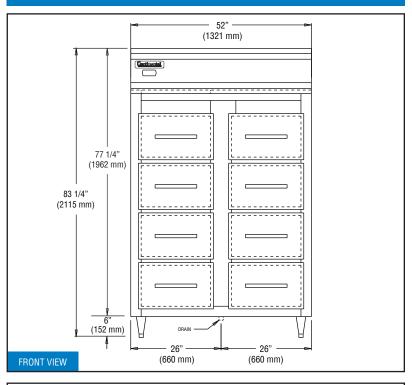

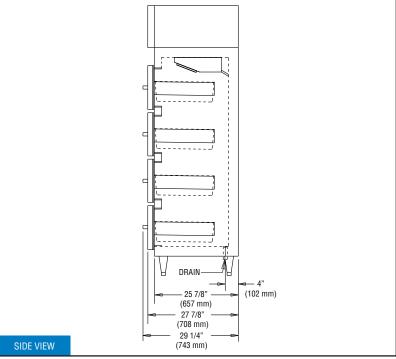

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear. 1" NPS Drain Tube must be directly piped to a building floor drain or connected to a suitable waste line.