

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

MODEL: DD72HC-1-S

DD72HC Solid Door Dual Tower With Dual Faucets Hydrocarbon Series



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor is heavy-duty stainless steel
- Full electronic control
- Dual towers with dual faucets
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria.
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing door with 120° stay-open feature
- · Magnetic gaskets provide positive door seal
- Field reversible door (hinge kit not included)
- · Compressor available on left or right, specify at time of unit order

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F

OPTIONS & ACCESSORIES

- Stainless steel interior
- Stainless steel back
- Shelves
- Shelf clips
- Custom tower hole location
- Drip tray location option
- Wine models
- Faucet locks
- Glass rinser
- 3"-6" casters or 6" black legs
- 1- 6 Tap tower
- 2, 3 & 4 way manifolds
- Dual tap placement option
- No draft/hole cover option
- Remote option* (see note on back on page)
















MODEL	DD72HC-1-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	
Depth Overall	24 %"	
Height Overall (floor to top of tap)	51 ¼"	
Number of Doors	3	
Depth with Door Open 90°	42 %"	
Door Opening (in)	17 ¾" x 29 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	19.95	
Internal Width Overall (in)	60 1⁄4"	
Internal Depth Overall (in)	18 ¾"	
Internal Height Overall (in)	27 %"	
Number of 1/2 Kegs	3	
ELECTRICAL DATA		
Full Load Amperes	3.1	
REFRIGERATION DATA		
Horsepower*	1/3	
Capacity (BTU/Hr)*	1942	
SHIPPING DATA		
Gross Weight - Crated	424 lbs	
Height - Crated	40"	
Width - Crated	75"	
Depth - Crated	26"	


^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

DD48/DD50 KEG CAPACITY



2 Std. 1/2 Keg 2 Std. 1/2 Keg 2 Std 1/2 Keg 1 X 1/4 Slim 2 X 1/6 Keg

Bar Equipment-Direct Draw Beer Dispenser Model: DD72HC-1-S

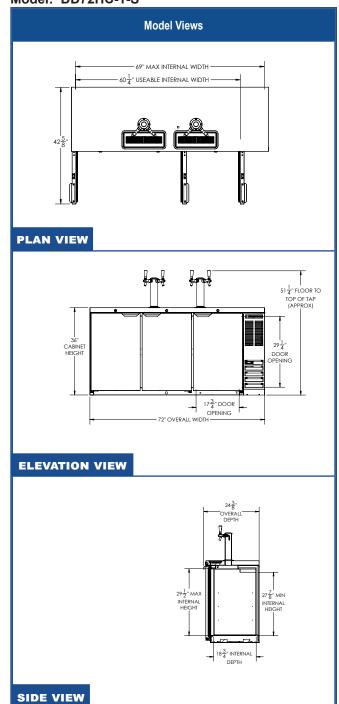





Units pre-wired at factory 115/60/1 NEMA 5-15P and include 8' long cord and plug set.



