

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

DD78HC Solid Door Twelve Tap Tower Hydrocarbon Series

MODEL: DD78HC-1-B-12T

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty



CABINET CONSTRUCTION

- Exterior is wear resistant black vinyl coated steel with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling reinforced floor is heavy-duty stainless steel
- Full electronic control
- Twelve tap tower
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing door with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible door (hinge kit not included)
- Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

- Stainless steel interior
- Stainless steel back
- Shelves
- · Shelf clips
- Wine models
- Faucet locks
- Glass rinser
- 3" casters or 6" adjustable with plate
- No draft/hole cover option
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- · Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F
















MODEL	DD78HC-1-B-12T
EXTERNAL DIMENSIONAL DATA	
Width Overall	79"
Depth Overall	29"
Height Overall (floor to top of tap)	52 % "
Number of Doors	3
Depth with Door Open 90°	49 ¼"
Door Opening (in)	19 % " x 30"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	33.59
Internal Width Overall (in)	66 ½"
Internal Depth Overall (in)	23 1/8"
Internal Height Overall (in)	27 ³ ⁄8"
Number of 1/2 Kegs	4
ELECTRICAL DATA	
Full Load Amperes	5.5
REFRIGERATION DATA	
Horsepower*	1/3
Capacity (BTU/Hr)*	2392
SHIPPING DATA	
Gross Weight - Crated	478 lbs
Height - Crated	45"
Width - Crated	81"
Depth - Crated	31"


^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

DD78 KEG CAPACITY



4 Std. ½ Keg

Bar Equipment-Direct Draw Beer Dispenser Model: DD78HC-1-B-12T

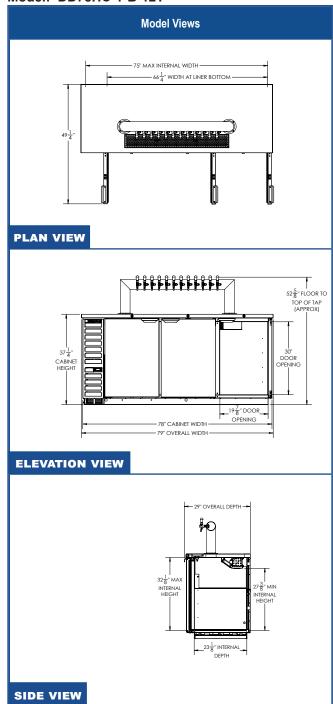

*ELECTRICAL CONNECTION



Units pre-wired at factory 115/60/1 NEMA 5-15P and include 8' long cord and plug set.













