DESIGNER LINE WARMER

Model: DL1W-HD



1-Section Reach-In Warmer with Half Doors

DL1W-HD - Stainless steel front, aluminum end panels and interior

DL1W-SA-HD - Stainless steel exterior, aluminum interior

DL1W-SS-HD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Pass-Thru
Add'l chrome-plated steel shelves	Special electrical req. (consult factory)
Stainless steel shelves	Correctional Facility Options
Pan slide assemblies	One way security screws
Casters	Locking hasp (lock not included)
Custom laminates	Stainless steel mesh cover
Full door	Coverless hinges
Glass doors	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
model Specifica.	
Location:	
Item No:	Quantity:

Standard Model Features

SIS #:

HEATING SYSTEM

AIA #:

Self contained, performance-rated heating system
90°F to 180°F temperature range
Top mounted heating plenum "plug" w/circulating fan
Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handles
Cam action, lift off hinges
Self-closing doors
Magnetic snap-in door gaskets
Cylinder lock in each door
(3) heavy-duty, chrome-plated steel shelves
Adjustable 6" stainless steel legs

MODEL FEATURES

Automatic interior lighting

Electronic controller w/digital display & hi-low alarm

Stainless steel strip heaters located in base of interior

Rehinging of door (in the field)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	21 (595 cu I)
Width, Overall (in.)	26 (660 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	55 1/2 (1410 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Half Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 6" legs)	83 1/4 (2115 mm)
No. of Doors	2
No. of Shelves	3
Shelf Area (sq. ft.)	20.4 (1.9 sq m)
Tray Slide Capacity (top section)	9
Tray Slide Capacity (bottom section)	6

ELECTRICAL DATA


Voltage	208-230/60/1
Feed Wires (incl. ground)	3
Total Amps (int'l)	7.2 (7.2)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (int'l)	No (No)


SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	31 5/8 (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	65 (1841 cu I)
Weight Std - Crated (lbs.)	284 (129 kg)
Weight SS - Crated (lbs.)	300 (136 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

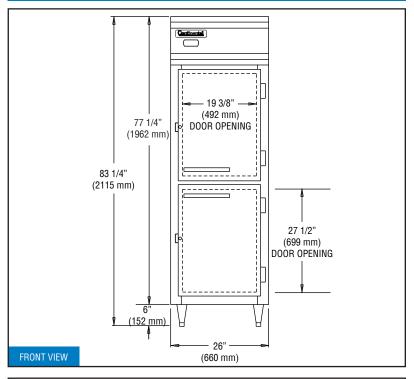

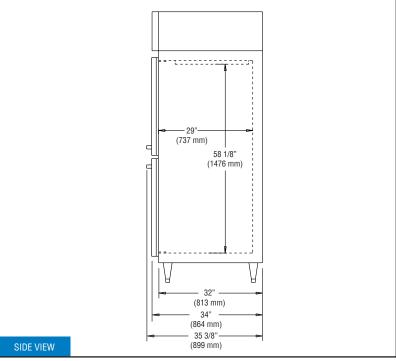

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.