DESIGNER LINE WARMER

Model: **DL1WE**



1-Section Extra-Wide Reach-In Warmer

DL1WE - Stainless steel front, aluminum end panels and interior **DL1WE-SA** - Stainless steel exterior, aluminum interior **DL1WE-SS** - Stainless steel exterior and interior



Options and Accessories

| (upcharge and lead times may apply) | | |
|-------------------------------------|---|--|
| Stainless steel case back | Pass-thru | |
| Add'I chrome-plated steel shelves | Special electrical req. (consult factory) | |
| Stainless steel shelves | Correctional Facility Options | |
| Pan slide assemblies | One way security screws | |
| Casters | • Locking hasp (lock not included) | |
| Custom laminates | Stainless steel mesh cover | |
| Half doors | Coverless hinges | |
| Glass door | | |

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

| Project Name: | | |
|------------------|-----------|--|
| | | |
| Model Specified: | | |
| | | |
| Location: | | |
| | | |
| Item No: | Quantity: | |
| | | |
| AIA #: | SIS #: | |

Standard Model Features

HEATING SYSTEM

Self contained, performance-rated heating system 90°F to 180°F temperture range Top mounted heating plenum "plug" w/circulating fan Unique air flow distribution ducts

CABINET ARCHITECTURE

| 3" non-CFC polyurethane foam insulation |
|--|
| Smooth, polished chrome workflow door handle |
| Cam action, lift off hinges |
| Self-closing door |
| Magnetic snap-in door gasket |
| Cylinder lock in door |
| (3) heavy-duty, chrome-plated steel shelves |
| Adjustable 6" stainless steel legs |
| |

MODEL FEATURES

Automatic interior lighting Electronic controller w/digital display & hi-low alarm Stainless steel strip heaters located in base of interior Rehinging of door (in the field)

APPROVAL:

Model Specifications

Model Plan Views

| DIMENSIONAL DATA | |
|---------------------------------------|------------------|
| Net Capacity (cu. ft.) | 22 (623 cu l) |
| Width, Overall (in.) | 28 1/2 (724 mm) |
| Depth, Overall (in.) (incl. handle) | 35 3/8 (899 mm) |
| Depth (in.) (less door) | 32 (813 mm) |
| Depth (in.) (door open 90°) | 58 (1473 mm) |
| Clear Door Width (in.) | 21 7/8 (556 mm) |
| Clear Door Height (in.) | 58 5/8 (1489 mm) |
| Height, Overall (in.) (incl. 6" legs) | 83 1/4 (2115 mm) |
| No. of Doors | 1 |
| No. of Shelves | 3 |
| Shelf Area (sq. ft.) | 22.2 (2.1 sq m) |
| Tray Slide Capacity | 19 |
| | |


ELECTRICAL DATA


| Voltage | 208-230/60/1 |
|-------------------------------|--------------|
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 7.2 (7.2) |
| Total Wattage @ 208-230 volts | 1500 |
| 10 ft. Cord/Plug (int'l) | No (No) |
| | |

SHIPPING DATA

| Height - Crated (in.) | 85 1/2 (2172 mm) |
|----------------------------|------------------|
| Width - Crated (in.) | 31 5/8 (803 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |
| Volume - Crated (cu. ft.) | 65 (1841 cu l) |
| Weight Std - Crated (lbs.) | 290 (132 kg) |
| Weight SS - Crated (lbs.) | 305 (138 kg) |

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

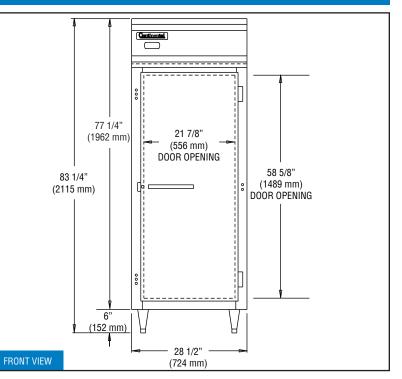

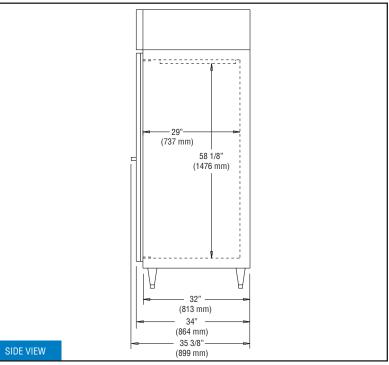

Continental[®] Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Intertek



IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.