DESIGNER LINE ROLL-IN WARMER

Model: DL1WI-E




1-Section Extra-High Roll-In Warmer with 72" Cart Capacity

DL1WI-E - Stainless steel front, aluminum end panels and interior

DL1WI-SA-E - Stainless steel exterior, aluminum interior

DL1WI-SS-E - Stainless steel exterior and interior





Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Correctional Facility Options
Chrome or stainless steel shelves	One way security screws
Rehinging of door (consult factory)	Locking hasp (lock not included)
Custom laminates	Stainless steel mesh cover
Half doors	Coverless hinges
Special electrical req. (consult factory)	

Consult factory for other model configurations, options and accessories.

Standard Model Features

HEATING SYSTEM

Self-contained, performance-rated "plug" heating system 90°F - 180°F temperature range

Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Magnetic snap-in door gasket

Cylinder lock in door

Self-closing door

72 1/2" high door opening (72"H rack capacity*)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

Removable stainless steel rack guides

Removable stainless steel ramp

Reinforced stainless steel floor

* Racks not supplied

IMPORTANT NOTE: Cabinet upper side panels and heating "plug" system can be removed and reinstalled at installation site where space limitations are confining.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	34 (963 cu I)
Width, Overall (in.)	35 1/4 (895 mm)
Depth, Overall (in.) (incl. handle)	35 3/8 (899 mm)
Depth (in.) (less door)	32 (813 mm)
Depth (in.) (door open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Door Height (in.)	72 1/2 (1842 mm)
Height, Overall (in.)	92 (2337 mm)
No. of Doors	1
Rack Capacity**	1

ELECTRICAL DATA


Voltage	208-230/60/1
Feed Wires (incl. ground)	3
Total Amps (int'l)	7.2 (7.2)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (int'l)	No (No)


SHIPPING DATA

Height - Crated (in.)	97 (2464 mm)
Width - Crated (in.)	43 (1092 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	98 (2489 cu I)
Weight Std - Crated (lbs.)	360 (163 kg)
Weight SS - Crated (lbs.)	420 (191 kg)

** Maximum rack size including wheels - $27"W \times 29"D \times 72"H$ Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

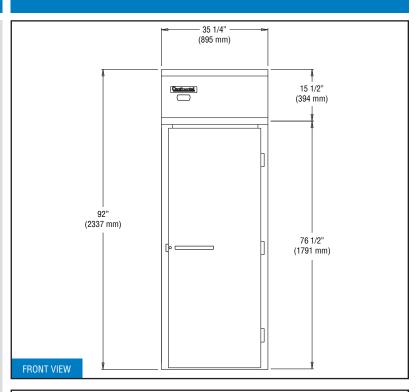

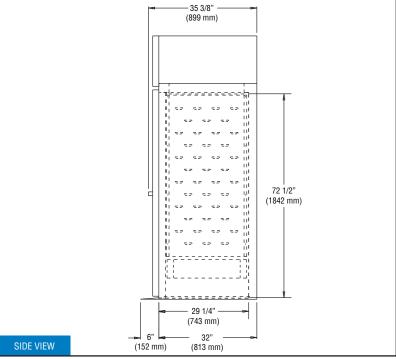

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.