



# ARTISAN<sup>1</sup> DECK OVEN



**Artisan Stone Deck Oven, Individual Programmable Control per Chamber, Individual Shot Steam per Chamber, Standard One Piece Shipment, Single Electrical Connection, Single Water & Drain Connection, Stainless Steel Construction, Multiple Deck Heights (6", 8", 10", 12"), 1" Thick Refractory Stone Deck, 99 Hour Delay-Start Timer, Standard Heavy Duty Legs with Casters, Economy Mode for Energy Saving**



PROJECT \_\_\_\_\_


ITEM NO. \_\_\_\_\_

NOTES \_\_\_\_\_

MODEL NUMBER: **1 T**



\*SHOWN IN 1T4

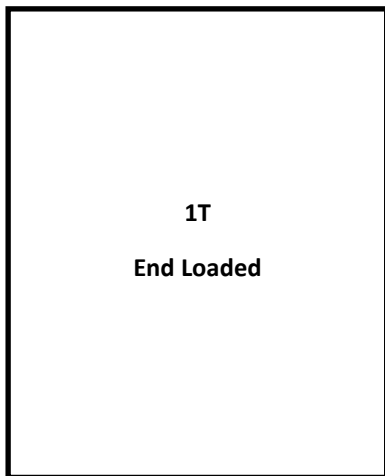

### FEATURES

- Independent Baking Decks (up to 4) with Digital Control Panels
- Deck Capacity of 1, 2, 3 or 4 Pans
- Deck Heights
  - 6" (152mm)
  - 8" (204mm) STANDARD
  - 10" (254mm)
  - 12" (305mm)
- 600°F (316°C) Max Bake Temperature
- Independent Temperature Control for Upper & Lower Deck Elements, Plus Front Temperature Loss Control
- Independent Shot Steam Per Deck with Steam Box On/Off Control
- 99 Hour Delay Start Up Timer & Economy Mode

### CONSTRUCTION

- Stainless Steel Construction
- 1" (25 mm) Refractory Stone Deck
- Single Point Connection for Electrical, Drain & Water
- Fully Insulated Illuminated
- Fully Retracting Doors (Save Space when Loading & Unloading)
- Legs with Swivel Casters (2 locking)
- One Piece Shipment

### OPTIONS & ACCESSORIES

- Marine Specification
- Water Filter (50-1530)
- Standard Proofer for 1 - 2 Decks (ES1T)
- Low Profile Proofer for 3 Decks (ES1TP)
- Stainless Steel Deck
- Non-Functional Eyebrow Canopy (EH1T)
- Loaf Loader (LL)
- Single Phase Electrical
- 380-415V Electrical Configuration

### CLEARANCES

- 1" (25mm) Sides & Back
- 6" (153 mm) Top

### WARRANTY

- One Year Labor & Two Year Parts

### PLEASE NOTE

- One Single Electrical Drain, Water Connection. Multiple Decks are inter-connected.
- Electrical Inlet located at the back on top right hand corner.
- For Steam Efficiency, use minimum water inlet pressure 50 PSI.
- To prevent steam system scale issues, install water softener rated for a minimum of 3 GPM.





PROJECT \_\_\_\_\_

ITEM NO. \_\_\_\_\_

NOTES \_\_\_\_\_

MODEL NUMBER: **1 T**

## DECK HEIGHT CONFIGURATOR

### 1. Optional Eyebrow Canopy



**Dimensions:** 5" H (128mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

### 2. Top Cover Plate



**Dimensions:** 2 1/2" H (64mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

### 3. Deck Choice #1 - 6" Internal Chamber Height



**Exterior Dimensions:** 13 5/8" H (347mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 6" H (153mm) x 18 1/2"W (908mm) x 30" D (762mm)

**Crated Weight:** 580 lbs (263 kg)

### 4. Deck Choice #2 - 8" Internal Chamber Height



**Exterior Dimensions:** 15 5/8" H (397mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 8" H (203mm) x 18 1/2"W (908mm) x 30" D (762mm)

**Crated Weight:** 580 lbs (263 kg)

### 5. Deck Choice #3 - 10" Internal Chamber Height



**Exterior Dimensions:** 17 5/8" H (447mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 10" H (253mm) x 18 1/2"W (908mm) x 30" D (762mm)

**Crated Weight:** 580 lbs (263 kg)

### 6. Deck Choice #4 - 12" Internal Chamber Height



**Exterior Dimensions:** 19 5/8" H (497mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

**Interior Dimensions:** 12" H (303mm) x 18 1/2"W (908mm) x 30" D (762mm)

**Crated Weight:** 580 lbs (263 kg)

### 7. Base Plate



**Dimensions:**

2 1/2" H (64mm) x 35 3/4"W (908mm) x 46 1/2" D (1181mm)

### 8. Standard Legs with Casters



**Dimensions:**

**One Deck:** 33" H (838mm) x 35 3/4"W (908mm) x 37 1/2" D (952mm)

**Two Deck:** 24" H (610mm) x 35 3/4"W (908mm) x 37 1/2" D (952mm)

**Three Deck:** 21" H (533mm) x 35 3/4"W (908mm) x 37 1/2" D (952mm)

**Four Deck:** 9" H (227mm) x 35 3/4"W (908mm) x 37 1/2" D (952mm)

### 9. Optional Proofer



**Standard Proofer Dimensions (For 1 - 2 Chambers):**

32 1/8" H (817mm) x 35 3/4"W (908mm) x 37 1/2" D (953mm)

**Shipping Weight:** 300 lbs (137 kg)

**Low Profile Proofer Dimensions (For 3 Chambers):**

32 1/8" H (817mm) x 35 3/4"W (908mm) x 37 1/2" D (953mm)

**Shipping Weight:** 300 lbs (137 kg)





PROJECT \_\_\_\_\_

ITEM NO. \_\_\_\_\_

NOTES \_\_\_\_\_

MODEL NUMBER: **1 T**

**ELECTRICAL SYSTEM SINGLE PHASE**

Model	Electrical System *ground wire not included						Water & Drain	Capacity (per deck)	
	Volts	Phase	Amps	kW	Hz	Wires		13"x18"	18"x26"
1T1	208	1	24	5	50/60	2	1/2" (12)	2	1
	240	1	21	5					
1T2	208	1	48	10	50/60	2	1/2" (12)	2	1
	240	1	42	10					
1T3	208	1	70	15	50/60	2	1/2" (12)	2	1
	240	1	63	15					
1T4	208	1	87	20	50/60	2	1/2" (12)	2	1
	240	1	84	20					

**ELECTRICAL SYSTEM THREE PHASE**

Model	Electrical System *ground wire not included						Water & Drain	Capacity (per deck)	
	Volts	Phase	Amps	kW	Hz	Wires		13"x18"	18"x26"
1T1	208	3	14	5	50/60	3	1/2" (12)	2	1
	240	3	12	5					
	480	3	6	5					
1T2	208	3	28	10	50/60	3	1/2" (12)	2	1
	240	3	24	10					
	480	3	12	10					
1T3	208	3	42	15	50/60	3	1/2" (12)	2	1
	240	3	36	15					
	480	3	18	15					
1T4	208	3	56	20	50/60	3	1/2" (12)	2	1
	240	3	48	20					
	480	3	24	20					

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION A | 4/22/2021

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca

