

Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



OPTIONS:

- Stainless steel interior
- ☐ 27" stainless steel angular legs
- ☐ Open leg base, stainless steel, w/rack guides
- ☐ Stainless steel back enclosure panel
- ☐ Seismic feet
- ☐ Field stacking kit
- ☐ Common gas manifold
- ☐ 48" flexible disconnect, w/restraining device
- Down draft hood
- ☐ Flu deflector
- Casters
- ☐ Porcelain drip tray
- Extra deep oven racks
- ☐ Prison package tamper proof screws, lexan hinged cover with lockable clasp
- Extended warranty

DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102 800.735.3853 Toll Free 314.231.5074 Fax www.dukemfg.com SS-1080 613Q-G3 Single-Deep-Gas

PRODUCT INFO	DRMATION:				
PROJECT:					
ITEM:					
QUANTITY:					
MODEL:					
Duke Convection Ovens - "Q" Series					
Single Deck - Deep Depth - Gas					
■ 613Q-G3	Single deck, deep depth				
STANDARD FEATURES					
6 racks/13 rack positions					

- Porcelain interior finish
- 50/50 stainless steel independent doors
- Doublepane glass both doors
- 27" angular painted/adjustable legs
- 2 Speed motor

Approval Stamp(s):

OVEN SECTION

- Stainless steel front, sides and top
- 1 ½" insulation on bottom, sides and back
- 3" insulation on top
- Interior lights

BURNER SYSTEM

- 40,000 BTU
- High output atmospheric burner system
- Main gas shut off valve
- Bult-in gas regulator

OVEN CONTROLS

- ☐ "V" Basic snap action thermostat (200°-500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- ☐ "XX" Solid state digital time and temperature controls, 12-hour countdown timer, Cook and Hold feature, 2-speed fan, Pulse fan capability

Certifications










Specification subject to change




DUKE CONVECTION OVENS "Q" SERIES


SINGLE DECK - GAS - DEEP DEPTH

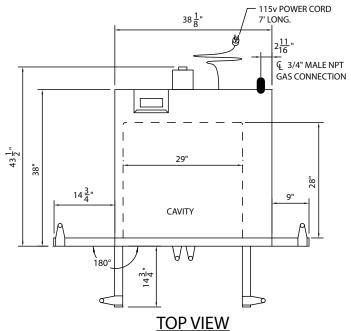

Gas Specifications						
613Q-G3	BTU/Hour	46,000				
Regulated gas pressure required 3.5"WC natural /10" WC propane						
Combustible surface clearance - 1" side, 1" rear, 6" floor						
Gas connection						
3/4" Gas connection						
Electrical requirements: 3.5 Amps/ 115V						
Standard 115V units supplied with 5' cord and plug						

Specify gas type Specify altitude over 2000 feet





FRONT VIEW RIGHT SIDE VIEW

DIMENSIONS:

DIMENSIONS: Freight Class: 85										5
Madal		Height		Width		Depth		Cube ft.	Weight	
	Model	in.	cm	in.	cm	in.	cm	crated	lbs.	kg
	613Q-G3	43.5	110.5	38	96.5	60.	152.4	65.4	540	245.5



Duke Manufacturing Co.

2305 N. Broadway St. Louis, MO 63102 Phone: 314-231-1130 Toll Free: 1-800-735-3853 Fax: 314-231-5074

www.dukemfg.com