



DXP540



DINEX SUPERIOR FOUNDATION

Featured on our toughest cabinets:
Two 14 gauge aluminized steel reinforcing channels support our .080" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and heavy duty plate casters make this the strongest foundation in the industry.

MODEL NUMBER

- DXP540

When work loads increase and you need more cabinets, Econoline Cabinets from Dinex may be just the thing. Built to demanding Dinex specifications, these cabinets provide most of the same great features found on our heavy-duty cabinets. Though constructed without some of the cosmetic enhancements and touches of our standard cabinets, the Econoline series still provides the service and reliability you've come to expect from all Dinex products. They are offered in three of our most popular sizes to work flawlessly along side your other equipment.

STANDARD FEATURES

- Base is a solid bottom constructed of .080" aluminum, rolled edge acts as built in bumper
- Two 14-gauge aluminized steel reinforcing channels attach the casters and support the bottom panel
- Frame consist of four extruded channels 1-1/2" x 5/8" x .094" aluminum. Corners have .190 channel supports for reinforcement
- Single pan top constructed of one .080" thick aluminum panel, fully welded corners
- Glides are channels spaced on 1-1/2" centers with 5/8" ledge, .090 thick extruded aluminum continuously welded to the frame
- Door panel is .125" PVC coated aluminum attached to cabinet with bakery hinges, 270 degree door swing with card clip
- Back panel is .080" aluminum fully welded
- 1/2" extruded aluminum tie bar keeps cabinet square
- 16-gauge stainless steel positive gravity latch is

provided to keep door closed during transport

- Stainless steel side door latch holds door open
- Card clip, easy identification of cabinet content when door is closed

DIMENSIONS

- H68-1/4" x W21" x D27-3/8"

HEAVY-DUTY CASTERS

- 5" diameter x 1/1/4" wide swivel sealed wheels, two with brakes
- 350 lb. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility or superior performance even in freezing temperatures

COMMON OPTIONS


- Wheel brakes
- Push handle
- Personalized embossment
- Corner of perimeter bumpers
- See reverse side for additional options

WARRANTY

- One year parts and labor. Warranty is detailed on inside front cover of the price list.



Econoline Cabinets

Aluminum For Storage

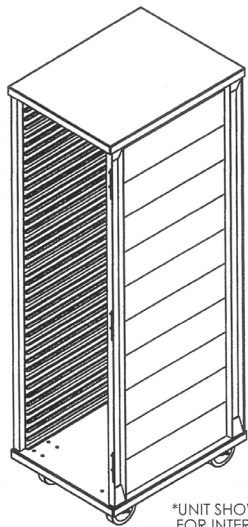

*UNIT SHOWN WITHOUT DOOR FOR INTERIOR DETAIL

Glides are channels spaced on 1-1/2" centers with 5/8" ledge

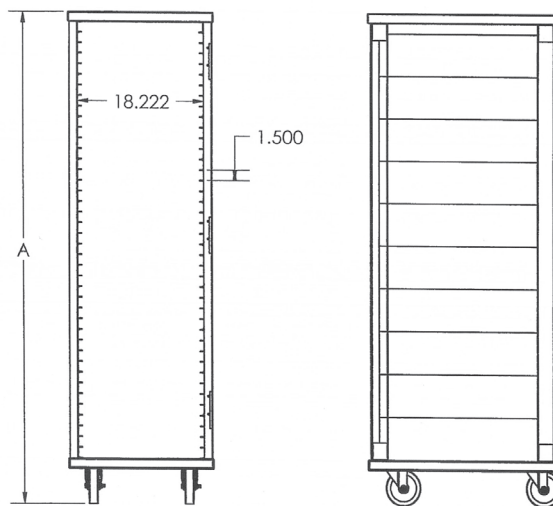

Model#	Description	Height Inches	Width Inches	Depth Inches	Channel Spacing (in.)	Pan Capacity	Ship Wt. (lbs)
DXP540	Cabinet	68-1/4"	21"	27-3/8"	1.5	40	136

*Rack capacities are for 18" x 26" sheet pans

Height includes casters.

Custom height sizes and glide spacing available.

Typical freight class: 100

OPTIONS / ACCESSORIES

- (DXPLD) Lexan full-view door
- (DXPDD) Dutch door, only available on 941 units
- (DXPCH) Chest handles, set of 2
- (DXPEMB) Personalized embossment, 12 letters per line
- (DXPPH) Push handle
- (DXPI) Insulating transport cabinet
- (DXPB) Set of 4 non-marking rubber corner bumpers
- (DXPPB) Full perimeter non-marking bumper
- (DXPWB) Wheel brakes, set of 2
- (DXP5x2) Heavy-duty casters, set of 4
- (DXPCP) Correctional package, includes welded casters and hole in door latch for paddlelock
- (DXPCHT2) Canned heat tray insert
- (DXPY4) Polyurethane 4" casters (set of 4)
- (DXPY5) Polyurethane 5" casters (set of 4)
- (DXPFL) Floor lock

J-3 SPEC

DINEX
www.dinex.com

4711 E. Hefner Road
Oklahoma City, OK 73131
800.654.8210
405.475.5600

LIMITED WARRANTY: DINEX warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.