## T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.

EC-3132-LF22

Item No.

ASME A112.18.1 / CSA B125.1

Sheet: 1

of 2

NSF 61 - Section 9 NSF 372 (Low Lead Content)

ANSI A117.1 (ADA)

UL 1951

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

|   | E                                   | This Spa       | ace for Architect/Engi      | neer Approval                                     |
|---|-------------------------------------|----------------|-----------------------------|---|
|   | <u>G</u>                            | Job Name       |                             | Date  |
| Α   | DA Compliant                        | Model Specifi  | ed                          | Quantity  |
| Cold <b>(</b>   | ChekPoint <sup>™</sup>              | Customer/Wh    | olesaler                    |   |
|   | ChekPoint                           | Contractor     |                             |   |
| Ø2 1/2"   |                                     | Architect/Engi | ineer                       |   |
| [64mm]  | L                                   |                |                             |   |
| Cast Spout w/   |                                     |                |                             |   |
| B-0199-28   |                                     |                | 5 1/2"                      | , 📥   |
| 2.2 GPM VR<br>Laminar Flow Device —                                     | Temperature Mix                     | king Handle    | [140mm                      | ]   |
| - He  | w/ Color Coded<br>(Optional Plug Ir |                |                             | <del>                                      </del> |
| Internal Above Deck   | Replace Handle<br>Temperature is F  | When           |                             |   |
| Electronics w/ Flow   | remperature is i                    | 10301)         | 6 5/8"                      | 7 11/16"  |
| Control Setting Switches. Powered w/ 6 VDC                              |                                     |                | 169mm]                      | [ 195mm ]   |
| Lithium Battery.  | Mounting                            |                |                             | . 00  |
|   | Surface                             |                |                             |   |
| Removable<br>Anti-Rotation Pin  |                                     | _              | 1/2"                        |   |
|   |                                     | _              | 8mm] /<br>ximum             |   |
| 13/16"<br>[21mm]  |                                     |                | ckness                      |   |
|   |                                     |                | _<br>Sho                    | wn w/ Optional                                    |
|   |                                     |                | Plug                        | Installed When                                    |
|   | -19" [483mm] Fle                    | xible          | Wat<br>is P                 | er Temperature<br>reset (Included)                |
|   | Stainless Steel S<br>Hoses          | supply         |                             | ,   |
|   |                                     |                |                             |   |
|   | -1/2" NPSM Swiv                     |                |                             |   |
| Ontional 400 040 VAC  | w/ Filter Washer                    | S              |                             |   |
| Optional 100-240 VAC — Adapter w/ 144" [3658mm]                         |                                     |                |                             |   |
| Power Cord w/ 2 Terminal  | -Check Valve Ada                    |                |                             |   |
| Plugs (Included)  | w/ 3/8" Compres<br>(9/16"-24 UN) In |                |                             |   |
| Rough-In Requirement:   |                                     |                |                             |   |
| Ø1 1/4" [32mm] Mounting Hole  |                                     |                |                             |   |
| Ø 3/16" [5mm] Ånti-Rotation Pin Hole (Optional) Product Specifications: |                                     |                | Product Compliance          | •   |
| Chrome Plated Brass Above Deck Electronics Faucet, Single Hole          |                                     |                | ASME A112 18 1 / CSA B125 1 |   |

Drawn: DHL Checked: KJG Approved: Date: 12/20/14 Scale: 1:6

Deck Mount, Cast Spout w/ VR 2.2 GPM Laminar Flow Device,

Point-of-Use Temperature Control, Battery or AC Adapter Powered, Flexible Stainless Steel Supply Hoses w/ 3/8" Compression Fittings




## T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3132-LF22

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

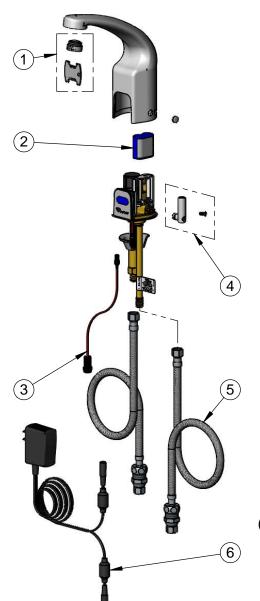

| ITEM<br>NO. | SALES NO. | DESCRIPTION   |
|-------------|-----------|---|
| 1           | B-0199-28 | VR 2.2 GPM Laminar Flow Device w/<br>Key                    |
| 2           | 019087-45 | 6VDC Lithium Battery, CR-P2                                 |
| 3           | 019088-45 | Auxiliary Power Connector Cable                             |
| 4           | 019082-45 | Lever & Body Screw Kit w/ L-Key                             |
| 5           | 018544-45 | Flexible Stainless Steel Supply Hose w/ Check Valve Adapter |
| 6           | 5EF-0002  | A/C Transformer   |
| 7           | 019086-45 | Body Plug, Pre-Set Temperature                              |



A maximum of (8) ChekPoint faucets can be powered by EC-HARDWIRE ChekPoint Hardwire AC Transformer when connected using EC-ADEWIRE cables. (Both sold separately)



Optional Plug Replaces Lever Handle When Pre-setting Temperature (Installs from Inside of Body)



015425-45 VR Aerator Key



018543-45 Torx T-20 VR L-Key

Flow Control Switches are Located Behind the Sensor. Remove Battery to Access Switches.

- \* Switches are set to DEFAULT position:
  - Auto Time Out = 15 seconds
  - Shut Off Delay = 1 second
  - Auto Flush = ÓFF
- \* Available Water Flow Control Selections:
  - Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
  - Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec
  - Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

## **Product Specifications:**

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Cast Spout w/ VR 2.2 GPM Laminar Flow Device, Point-of-Use Temperature Control, Battery or AC Adapter Powered, Flexible Stainless Steel Supply Hoses w/ 3/8" Compression Fittings

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: DHL Checked: KJG Approved: JHB Date: 12/20/14 Scale: NTS Sheet: 2 of 2