A family company manufacturing in the USA

www.glastender.com



F1FL36 with compressor left, stainless doors and top

CONFIGURATION
—HIGHLIGHT—

IN NINE

FINISHES

See our Product Directory for a complete list of cooler accessories.

Standard Features

- Locking door
- Self-contained high capacity refrigeration system
- Digital thermostat control with automatic defrost is easily visible
- Two Defrost Cycles:
 - 1. Automatic occurs every eight hours without affecting normal operation
 - 2. Manual user initiated button for complete sixhour defrost with automatic restart
- · All stainless steel interior
- Three adjustable shelves
- Includes LED interior lights with on/off switch
- Available without a finished top for integrated installation below customer supplied bar top
- Automatic condensate evaporator
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Front of cabinet is electrically heated
- · Stainless steel die cast handle with lock
- 180° swinging doors
- Optional glass door is triple pane, low E, Argon filled

Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Frosters, One Zone, Front Serviced, Low Profile

F1FL32, F1FL36

F1FL Configurable Options

Refrigeration Compartment Location:

• Left or Right

Refrigeration Compartment Cover Finish:

- Black vinyl-clad
- Unlaminated
- · Stainless steel
- · Jeweled stainless
- Laminated

Door Style & Finish:

- Door Black vinyl-clad
- Door Unlaminated
- Door Stainless steel
- Door Jeweled stainless
- · Door Laminated
- · Door Glass, black vinyl-clad
- Door Glass, stainless steel
- Door Glass, jeweled stainless
- Door Glass, laminated

Door Hinge Location:

• Left or Right

Door Handle:

- · Polished stainless
- · Polished brass
- · Stainless pull tab



Intertek

ek Intertek 4004503

Conforms to NSF/ANSI STD 7 and UL STD 471

Certified to CSA STD C22.2 No. 120

Top Style:

- No finished top
- Stainless top
- Laminated top
- Drainboard top

4" High Stainless Splashes (can only be ordered with stainless top):

- None
- Backsplash
- Left side splash
- Right side splash

Left and Right Side Finish:

- Black vinyl-clad
- · Stainless steel
- Laminated

Back Finish:

- · Galvanized steel
- Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Blue



Capable of storing specialty cocktail ice

Specifications

Electrical

- 120V, 1 phase, 60 Hz, 6.5 full load amps
- Dedicated 15 amp circuit is required
- Includes a 8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment

Refrigeration

- •1/3 HP, R290 refrigerant 130 grams (4.59 oz)
- 1300 BTU/hr refrigeration capacity (0.11 tons)
- Heat rejection 2048 BTU/Hr
- Operating range: 12°F (-11°C) to 35°F (2°C)
- Fin & tube evaporator with forced air circulation
- Equipped with manual fast freeze mode that accelerates the freezing process and automatically reverts back to the normal operating mode

Plumbing

- Automatic condensate evaporator. No drain connection required
- Optional drainboard top 1/2" ID line stubs out behind the compressor compartment. Field connections must be made at that point. Shelving
- Three adjustable coated shelves included

Optional 6" legs, specify accessory #CLS-5

• 1-5/8" diameter

• Stainless steel bullet feet *Materials*

- Stainless steel parts include: interior, front of cabinet, exterior subtop, exterior sides, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard doors and compressor cover
- Galvanized steel parts include: back and bottom
- Zinc plated CR steel parts include: leg sockets

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
very alastandar aam

Approval/Notes:

www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.


Frosters - One Zone, Front Serviced, Low Profile

Dimensional Information

PLAN VIEWS F1FL32 F1FL36 RECESSED BACK-RECESSED BACK 36" FOR ELECTRICAL 1-1/8' FOR ELECTRICAL 1-1/8' PLUG SPACE PLUG SPACE **SWING WILL SWING WILL CONTINUE IF CONTINUE IF** 18" BACK LINER TO 18" BACK LINER TO NO CABINET NO CABINET **INSIDE DOOR SILL** INSIDE DOOR SILL TO IMPEDE TO IMPEDE 180° SWING 180° SWING CONDENSING UNIT **CONDENSING UNIT** COMPARTMENT COMPARTMENT

SIDE VIEWS F1FL32 F1FL36 ADD 1" TO HEIGHT ADD 1" TO HEIGHT 23-3/4" 23-3/4" FOR FACTORY FOR FACTORY DOOR **DOOR INSTALLED TOP INSTALLED TOP OPENING OPENING** 29" 29' 20"

FRONT VIEWS

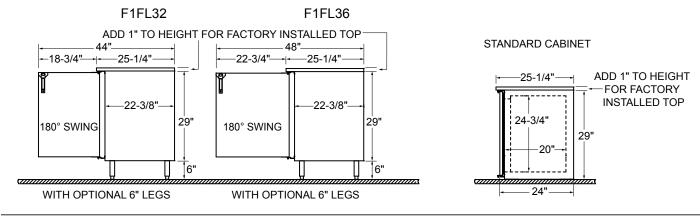

Note: Available with compressor left or right. Compressor left model shown.

		Capacities		
Model	Doors	10 oz. Mugs	6" High Pint Glasses	
F1SL32	1	90	72	
F1SL36	1	126	90	