



HANDY LINE SERVING WELLS

Serving Wells for 12"x 20" and GN 1/1 Bulk Food Pans

RADIANT "HLC-W" SERIES

Heavy-duty, mobile servers take the food whenever and wherever you need it to go

- 1** These open base units offer maximum flexibility for serving applications, allowing ample room for storage and transport to make your food service complete
- 2** Open base with individually controlled heated wells. Controls are up-front, easy to read and set, and recessed protected
- 3** Made for mobile applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport
- 4** Available from double well unit up to a service line of six (6) wells
- 5** Each heated well connects to built-in manifold drain system with easy access external shut-off valve
- 6** Customize with versatile service line optional accessories, such as a sneeze guard and tray slide shelf

**Two year limited warranty*



HLC-3W6-1-DRN
(Shown With Optional Accessory Stainless Steel Cutting Board)



Separately Controlled Wells



Made for Transport



Manifold Drain




Optional Sneeze Guard & Tray Shelf



(((RADIANT HEAT)))

SPECIFICATIONS

HANDY LINE SERVING WELLS

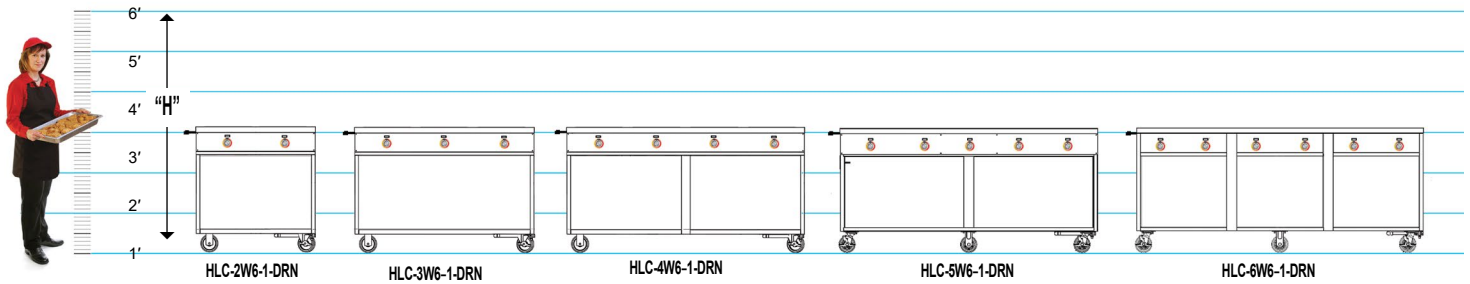

MODEL NUMBER	DEPTH OF WELL (MM)	NUMBER OF WELLS	STORAGE CAPACITY Height x Depth x Width	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CLASS 100	
				HIGH "H"	DEEP "D"	WIDTH "W"	CASTER SIZE	SHIP WT. LBS. (KG)
HLC-2W6-1-DRN	6.5" (165)	2	21.25" x 27.25" x 32" (8.35 CU.FT.)	37.25 (946)	27.5 (698)	34.25 (870)	5"	205 (93)
HLC-3W6-1-DRN	6.5" (165)	3	21.25" x 27.25" x 49" (12.85 CU.FT.)	37.25 (946)	27.5 (698)	51.5 (1308)	5"	300 (136)
HLC-4W6-1-DRN	6.5" (165)	4	21.25" x 27.25" x 66.5" (17.56 CU.FT.)	37.25 (946)	27.5 (698)	68.75 (1746)	5"	460 (209)
HLC-5W6-1-DRN	6.5" (165)	5	21.25" x 27.25" x 75" (20.12 CU.FT.)	37.25 (946)	27.5 (698)	77.5 (1969)	5"	560 (254)
HLC-6W6-1-DRN	6.5" (165)	6	21.25" x 27.25" x 83.5" (22.37 CU.FT.)	37.25 (946)	27.5 (698)	86 (2184)	5"	650 (295)

ELECTRICAL HLC-2W6-1-DRN					U.S.	CANADA	ELECTRICAL HLC-4W6-1-DRN					U.S.	CANADA
VOLTS	WATTS	PHASE	HERTZ	AMPS	PLUG	PLUG	VOLTS	WATTS	PHASE	HERTZ	AMPS	PLUG	PLUG
120	1000	Single	50/60	8.3	5-15P	6-15P	120	2000	Single	50/60	16.7	5-20P*	5-30P
220-240	1190	Single	50/60	5.0	6-15P	6-15P	220-240	2380	Single	50/60	9.9	6-15P	6-15P
ELECTRICAL HLC-3W6-1-DRN					U.S.	CANADA	ELECTRICAL HLC-5W6-1-DRN					U.S.	CANADA
VOLTS	WATTS	PHASE	HERTZ	AMPS	PLUG	PLUG	VOLTS	WATTS	PHASE	HERTZ	AMPS	PLUG	PLUG
120	1500	Single	50/60	12.5	5-15P*	5-20P	220-240	2975	Single	50/60	12.4	6-15P	6-15P
220-240	1785	Single	50/60	7.4	6-15P	6-15P	ELECTRICAL HLC-6W6-1-DRN					U.S.	CANADA
VOLTS	WATTS	PHASE	HERTZ	AMPS	PLUG	PLUG	VOLTS	WATTS	PHASE	HERTZ	AMPS	PLUG	PLUG
220-240	3570	Single	50/60	14.9	6-15P	6-15P	220-240	3570	Single	50/60	14.9	6-15P*	6-20P

* Dedicated Circuit

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 18 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean covered corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing stress plates at corners.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. HLC-5W6-1-DRN and HLC-6W6-1-DRN shall have a six caster configuration with two (2) rigid and four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

TOP MOUNT SERVING WELLS. Each well shall be one piece stainless steel, deep drawn with covered corners. Each well shall have ridge around top perimeter. Each insulated, individually thermo wrapped well shall have a separate adjustable thermostat and indicating light. Top well depth of 6.5" (165mm) is designed to be used wet. Accommodates up to a 12" x 20" x 6" or a GN 1/1.

DRAIN. Each heated well connects to built-in drain system with easy access external 3/4" solder joint shut-off valve.

ELECTRICAL CHARACTERISTICS. 3 wire grounded power cord and plug. See electrical data chart above for amperage and receptacle configuration. See electrical chart for models that require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

OPTIONAL ACCESSORIES

- ELECTRIC**
- 120 volt, 50/60 Hz, single phase
- 220 volt, 50/60 Hz, single phase
- CASTERS**
- All swivel or larger casters
- EXTRAS**
- Security packages
- Full extension bumper
- Tubular handles
- Drop down side shelf
- 12" drop down tray slide shelf (customer side)
- 8" drop down stainless steel cutting board (operator side)
- 8" drop down maple cutting board (operator side)
- Poly mounted to stainless steel cutting board
- Sneeze guard
- Cord winding bracket
- Custom cord location