

www.glastender.com



Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Hand Sinks

HSA-12, HSA-12-D, HSA-18, HSB-12, HSB-12-D, HSB-12-AD, HSB-18

Standard Features

- Manufactured with total welded construction to meet NSF® standards
- All stainless steel construction
- One-piece seamless top and backsplash featuring 1/4" radius corners for easy cleaning
- Adjustable stainless steel bullet feet
- 9-1/4" by 11-1/2" by 6" deep sink bowl with hot and cold water faucet
- Faucets are standard and ship mounted
- Models HSA-12-D, HSB-12-D and HSB-12-AD feature a soap dispenser and front skirt mounted C-fold paper towel dispenser
- · A lift-out perforated plastic wet waste strainer is available as an accessory. Specify part number 03000483.
- Models HSA-12, HSA-12-D, and HSB-12-AD are available with a foot-operated faucet. Specify accessory number FOF-B.
- Model HSB-12-D is available with a foot-operated faucet. Specify accessory number FOF-D.



All faucets are NSF/ANSI 61, Annex G low lead compliant

Specifications

Intertek

4004503 Conforms to ANSI/NSF STD 2 Certified to CSA/CAN STD B45.4

Drain

• 1-1/2" I.P.S. Threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer

Faucet

- Deck mount on 4" centers, accepts 3/8" sink leads, hot and cold water connections required (excluding Models HSA-12, HSA-12-D, & HSB-12-AD)
- Models HSA-12, HSA-12-D, & HSB-12-AD: Backsplash mounted on 4" centers, accepts 3/8" sink leads, hot and cold water connections required
- Optional foot-operated faucet on HSA-12, HSA-12-D, HSB-12-D, and HSB-12-AD: single hole, (2) 1/2" NPT female inlets and (1) 1/2" NPT female outlet
- NSF/ANSI 61, 372 low lead compliant

MARNING: The plastic wet waste strainer accessory can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov. Part #03000483 Warning applies to State of California only.

Sink Bowl Dimensions

• 9-1/4" by 11-1/2" by 6" deep

- 1-5/8" diameter. 16 gauge stainless steel
- Stainless steel bullet feet

Materials

• 20 gauge stainless steel parts include: all components unless otherwise noted



Optional foot-operated faucet

FOF-B

- HSA-12
- HSA-12-D
- HSB-12-AD

FOF-D

• HSB-12-D

To view underbar installation instructions, please visit; https://www.glastender.com/PDF/F-750-165 Underbar Installation Instructions.pdf To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011 ss clean care.pdf


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Dimensional Information

PLAN VIEWS

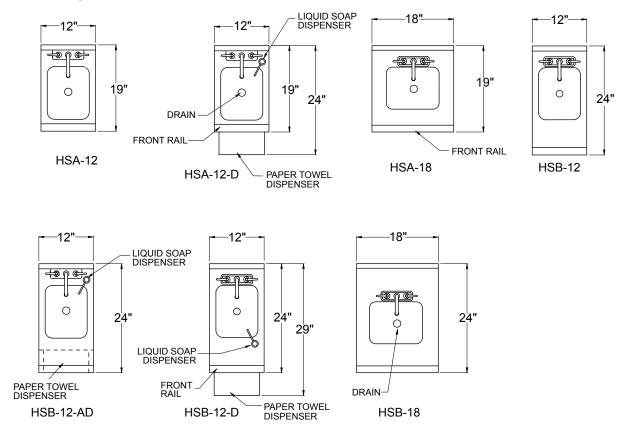

SIDE ELEVATIONS

