



C1SU24
with compressor right,
4" casters, stainless door
and top

See our Product Directory for a complete list of cooler accessories.



Standard Features

- Stainless steel finished top
- Locking door(s)
- LED interior lighting
- Heated mullion to minimize condensation
- Two adjustable shelves per door
- Stainless pull tab door handle(s)
- Any door opening may be converted to a drawer section

Specifications

Electrical

- 120V, 1 phase, 60 Hz
- Full load amps - 2.75
- Dedicated 15 amp circuit is required
- Includes a 6 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment

Refrigeration

- R290 - 105 grams
- Compressor - 1/8 HP
- Heat rejection - 1,126 BTU/Hr

Operating Range

- 34°F (1°C) to 40°F (4°C)

Plumbing

- Automatic condensate evaporator. No drain connection required.



5-15P

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Coolers, One Zone, Side Serviced, Undercounter

C1SU24, C1SU28, C1SU36, C1SU44, C1SU48

C1SU Configurable Options

Refrigeration Compartment Location:

- Left or Right

Refrigeration Compartment Cover Finish:

- Black vinyl-clad
- Stainless steel
- Jeweled stainless

Door/Drawer Style & Finish:

- Door - Black vinyl-clad
- Door - Unlaminated
- Door - Stainless steel
- Door - Jeweled stainless
- Door - Laminated
- Door - Glass, black vinyl-clad
- Door - Glass, stainless steel
- Door - Glass, jeweled stainless
- Door - Glass, laminated
- Drawers - Black vinyl-clad
- Drawers - Unlaminated
- Drawers - Stainless steel
- Drawers - Jeweled stainless
- Drawers - Laminated

Door Hinge Location (specify for each door):

- Left or Right

Left and Right Side Finish:

- Black vinyl-clad
- Stainless steel
- Laminated

Back Finish:

- Galvanized steel
- Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- Blue

Casters or Legs:

- 4" casters
- 2-1/2" casters
- 6" legs



Intertek

EP 5016978
Energy Performance
Verified / Rendement
Énergétique Vérifié



Intertek

4004503
Conforms to NSF/ANSI STD 7
and UL STD 471



Intertek

Certified to CSA STD C22.2 No. 120
NSF 7 listed for
open food as a storage refrigerator

Shelving

- Two adjustable coated shelves per door included (does not include drawer sections)

Materials

- Stainless steel parts include: exterior sub-top, interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: optional sides, doors and compressor cover
- Galvanized steel parts include: back and bottom
- Zinc plated CR steel parts include: leg sockets

Weight Bearing Capacity

- Counter tops and other accessories should not exceed 500 pounds per door

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com


Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.


Coolers - One Zone, Side Serviced, Undercounter

Dimensional Information


PLAN VIEWS

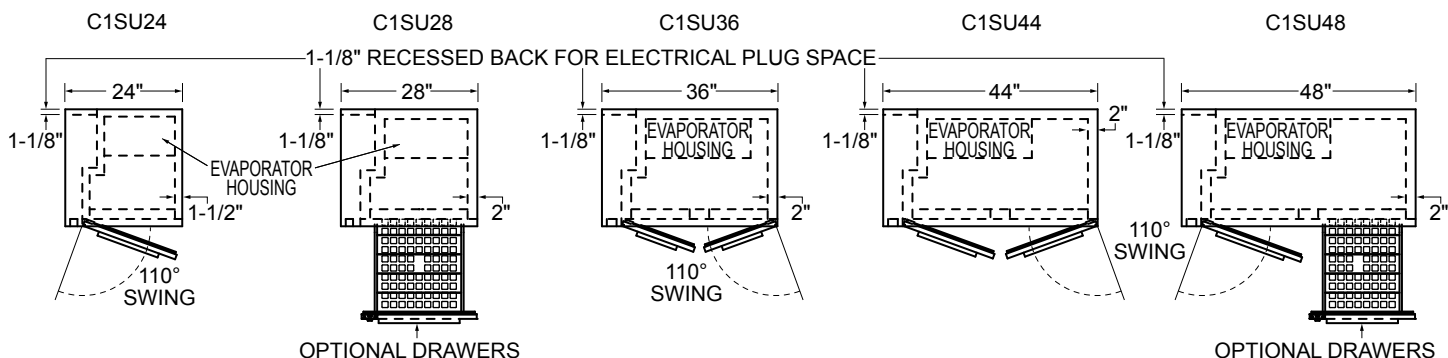

FRONT VIEWS

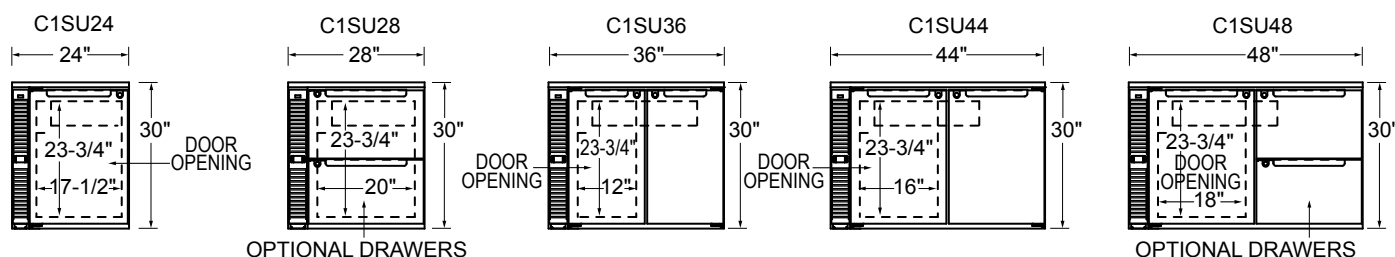

SIDE VIEWS

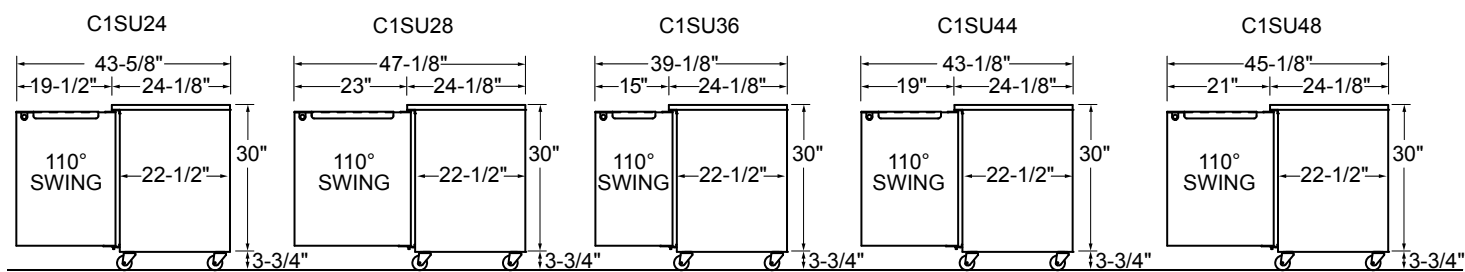

SHOWN WITH OPTIONAL C-4X4 CASTERS. ALSO AVAILABLE WITH 2-1/2" CASTERS OR 6" LEGS.

Note: Available with compressor left or right. Compressor left model shown.

Model	Doors	Cubic Ft Capacity
C1SU24	1	4.77
C1SU28	1	5.32
C1SU36	2	7.59
C1SU44	2	9.92
C1SU48	2	11.09

*Drawer units hold up to 40 wine bottles per 20" section and up to 60 wine bottles per 24" section

SIDE VIEWS

