

Glass Three Door Refrigerator

Model No.

GR72-HC



← **GR72-HC**

Features:

- Electronic Thermostat and Digital LED Temperature Display
- High Efficiency CFC Free Insulation
- Self-Closing Doors
- Double Pane Glass Doors Remain Open Past 90° Low-e Double Pane Glass Doors
- Vinyl Coated Shelves
- INTERIOR: White Powder-Coated Steel
- EXTERIOR: White Powder-Coated Steel
- Stainless Steel Floor
- LED Internal Lamp
- Top Illuminated Top Panel

You will appreciate the attractive professional aesthetics of this unit which will add curb appeal to any type of business. Our units are featured with white powder coated steel interior and exterior, double pane glass, self-closing lockable doors, digital controls with a LED readout and foamed in place polyurethane cell insulation. Model GR-35 is featured with low-e triple pane glass doors.

** Unit is shipped with wheels installed.*

Warranty Info:

Two Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.

Three Year

- Additional Compressor, Part Only.



** See last page for more information.*



Revised 04/29/2020

GR72-HC



www.servware.com

Phone:(800).768.5953

Fax:(800).976.1299


GR72-HC Glass Three Door Refrigerator




Item # _____
 Project : _____
 Qty : _____



Front View

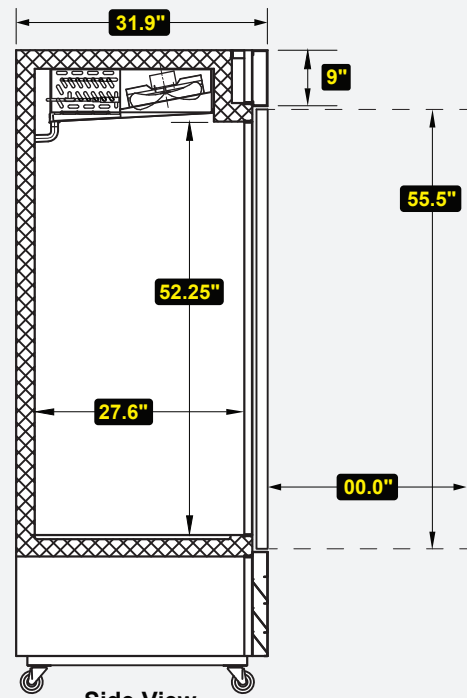

Side View

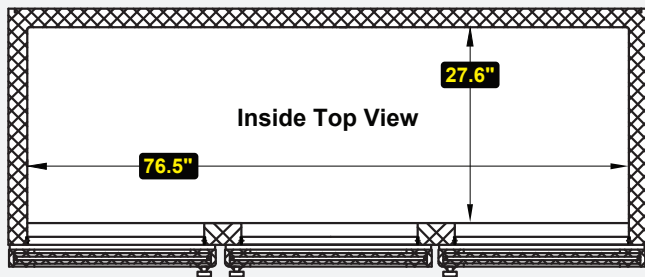

Inside Top View



NEMA 5-15P

➤ **Technical Information:**

MODEL #	DESCRIPTION	DIMENSIONS (W x D x H)	WEIGHT/LBS. (Shipping)
GR72-HC	3 Door 72 cu. ft. Glass Refrigerator	81" W x 31.9" D x 81.5" H	790 lbs.

CONSTRUCTION	
Exterior Material	White Powder-Coated Steel
Interior Material	White Powder-Coated Steel
Floor Material	Stainless Steel
Insulation Material	CFC Free Foam
Shelf Material	Vinyl Coated Wire
Shelf Count	4 Per Door

COOLING	
Temperature Range	33°F – 41°F
Refrigerant + Charge oz.	R290 / 5.29 oz.
BTU/H	3200
Defrosting	Every 6 Hours
Horse Power	1/2
Storage Capacity	72.00 cubic feet

ELECTRICAL	
Voltage	115
Amps	7
Hz	60
Phase	1

ADDITIONAL INFORMATION

Installation by certified commercial restaurant equipment installer recommended. Inspection before and after installation by licensed electrician for safe operation. Product designed for interior usage in a climate controlled location with adequate air circulation and not adjacent to a high temperature source.



Prop. 65 Warning for California Residents
WARNING: This product may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.



Phone: (800) 768-5953
 Fax: (800) 976-1299

Copyright © 2020 Serv-Ware Products Inc.

www.servware.com

GR Series - Glass Door Refrigerator

Notify carrier of damage! Inspect all components immediately.

Serv-Ware Products warrants to the original owner/user that any Refrigerator or Freezer manufactured shall be free of defects in material or workmanship, under normal use and maintenance, for a period of two (2) years from the original installation date or a maximum of thirty (30) months after the shipment date from Serv-Ware Products. Proper installation and start-up in accordance with the instruction manual supplied will be taken into consideration when evaluating the warranty on the specified equipment. Labor warranty charges are valid in the United States only.

The labor warranty shall include standard labor charges at the product location only. The end user is responsible for any emergency, overtime, or long-distance travel charges. Any labor service required to fulfill the warranty obligation must be performed by a refrigeration service company qualified and accepted by Serv-Ware Products. Billing will be handled between the service company and manufacturer directly, there will be no compensation for charges not billed to Serv-Ware Products by the service company. Serv-Ware Products reserves the right to have any warranty "failed" parts returned to the factory for inspection before agreeing to covering the above stated warranty labor charges.

This warranty does not include parts & labor coverage resulting from:

- External electrical power failure or improper supply voltage to product.
- Adverse operating conditions for the product.
- Failure to clean the condenser coil and/or maintain the product.
- Standard wear & tear items such as gaskets, light bulbs, and door hinges.
- Damage that is caused by employees or customers.
- Any part or assembly that has been altered, modified, or changed.
- Equipment usage in a residential or non-commercial setting.

LIMITATION OF LIABILITY AND OTHER WARRANTIES

Serv-Ware Products assumes no liability for misuse or inadequate maintenance of the Product. In no event shall the user be entitled to recover incidental or consequential damages. Including but not limited to; damages for inconvenience, food loss, rental or replacement equipment, loss of profits, or other commercial loss.

Warranties stated above are the only warranties made in connection with the sale and distribution of the Products. ANY AND ALL OTHER EXPRESSED STATUTORY AND IMPLIED WARRANTIES APPLICABLE TO THE PRODUCT INCLUDING, WITHOUT LIMITATION, ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE ARE EXPRESSLY DISCLAIMED. The warranty information set forth above shall be governed by and construed in accordance with the laws of the State of North Carolina and, if applicable, the laws of the United States of America. The warranty, as stated, is extended only to the original owner/user and is not assignable. Serv-Ware reserves the right to change product specifications without notice due to constant product improvement.