

Drop-In 4/3-Size Heated Wells - UR, C-UR **Fabricator Components**


Models: HWBLRT-43, -43D HWBLRN-43, 43D HWBRT-43, 43D HWBRN-43, -43D HWBHRT-43, -43D HWBHRN-43, -43D

Hatco's Drop-In 4/3-Sized Heated Wells are recognized as having UL components that hold hot food products at safe serving temperatures, plus have the added benefit of allowing fabricators the freedom to design their own steam tables. Like the full-size models, Hatco units offer a larger drain, more consistent holding temperatures, heavier stainless steel construction, easier-to-service design for quick change of components, and a remote thermostat with separate power switch.

Standard features

- Rectangular Uninsulated 4/3-Size Heated Well (Top mount only)
- Thermostatic controls feature a separate lighted ON/OFF rocker switch and temperature dial, allowing preset temperatures to be maintained
- Thermostatic or infinite (not available on 120V High Watt) controls available
- Without conduit and control box enclosure
- · Available with or without a drain
- 50% larger drain with flat screen simplifies cleaning and holds pans level
- Low (120V only), Standard and High Watt
- Thicker stainless steel construction and solid brazed joints for durability
- Easy service access to elements or thermostats
- *Fabricator will need to obtain UL approvals.

Project	
Item #	
Quantity	

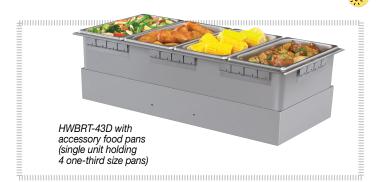

Oı	ptions	(available at time of purchase only)	
----	--------	--------------------------------------	--

- ☐ Additional Power Supply Lead Wire in 1' (305 mm) increments for "RN" (Inifinite Control) Components (Lead Wire only - Conduit not included)
- ☐ Thermostat with 6' Capillary for RT Components (Theromstat and Lead Wire only - Conduit not included)

Accessories

Rectangular Full-Size Stainless Steel Food Pans:

☐ Third-Size (2.5" [64 mm] H) ☐ Half-Size (2.5" [64 mm] H) ☐ Full-Size (2.5" [64 mm] H) ☐ Full-Size (4" [101 mm] H)

☐ Full-Size (6" [152 mm] H)

Round Food Pans:

□ 11-Quart (10-Liter)

Hinged Lid for Round Pans:

□ 11-Quart (10-Liter)

Notched Lid for Round Pans:

□11-Quart (10-Liter)

Stainless Steel Wire Trivets:

☐ Half-Size ☐ Full-Size

☐ Adapter to convert warmers to hold Round Pans which holds two

11-Quart (10-Liter) Inserts

Support Bars:

□ 12" (305 mm)

☐ Mounting Kit for combustible countertops

□¾" Ball Valve for unit with Drains

□¾" Gate Valve for unit with Drains


☐ Heated Well Remote Handle for ¾" Drains (requires a Ball or Gate Valve)













Drop-In 4/3-Size Heated Wells — UR, C-UR Fabricator Components

Models*: HWBL-43, -43D, HWB-43, -43D, HWBH-43, -43D

"RT" added to model name indicates unit with thermostat control, lit rocker switch and 36" (914 mm) capillary (ex. HWBRT-43). "RN" added to model name indicates unit with infinite switch control, pilot light and 36" (914 mm) lead (ex. HWBRN-43).).

Ordering Instructions (Please specify the following with each order)

- 1. Desired Voltage: 120, 208, 240V
- (export voltage available)


 2. Base Size of Heated Well
- A. 4/3 Rectangular:
- 12" x 27" (305 x 686 mm) **3. Drain** (with or without)

- 4. Wattage
- A. High Watt
- B. Standard Watt
- C. Low Watt (120V only)

5. Agency:

 A. UR and C-UR (UL recognized – Conduit and control enclosures not included). Fabricators will need to obtain UL approvals

HWB-43-UR Series

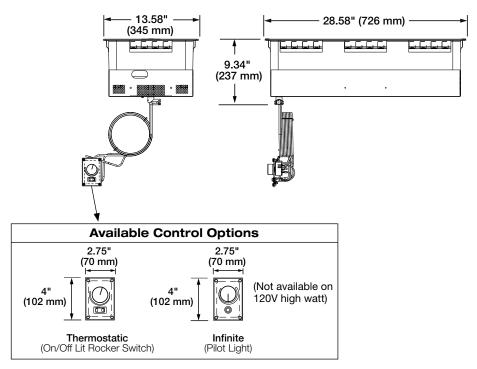



Cutout Dimensions for Non-Combustible Countertops

Model	Minimum Width (A)	Maximum Width (A)	Minimum Depth (B)	Maximum Depth (B)	
HWB-, HWBI-43 Series	12.69" (323 mm)	12.94" (328 mm)	27.69" (704 mm)	28.00" (711 mm)	

Combustible Countertop Opening ("Rectangular" cut-out)

Cutout Dimensions for Combustible Countertops A

Model	Minimum Width (A)	Maximum Width (A)	Minimum Depth (B)	Maximum Depth (B)	
HWB-, HWBI-43 Series	14.00" (356 mm)	14.25" (362 mm)	29.00" (737 mm)	29.25" (742 mm)	

[▲] Accessory Mounting Kit required for Top Mounts

Control Box Opening



Cutout Dimensions for Control Boxes

Control Box	Width (A)	Height (B)		
T-Stat Control	2.125" (54 mm)	3.375" (86 mm)		
Infinite Switch	2.125" (54 mm)	3.375" (86 mm)		

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

www.hatcocorp.com | support@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library | Chat



Drop-In 4/3-Size Heated Wells — **UR, C-UR Fabricator Components**

Models : HWBL-43, -43D, HWB-43, -43D, HWBH-43, -43D

"RT" added to model name indicates unit with thermostat control, lit rocker switch and 36" (914 mm) capillary (ex. HWBRT-43). "RN" added to model name indicates unit with infinite switch control, pilot light and 36" (914 mm) lead (ex. HWBRN-43).

Drop-In 4/3-Size Models — **UR, C-UR Fabricator Components**

The shaded areas contain electrical information for International models only

Watt	Model*	Dimensions (Width x Depth x Height)	Volts*	Watts	Amps	Optional Control Configuration		Ship Weight
Low Wa	HWBLRT-43 HWBLRT-43D HWBLRN-43 HWBLRN-43D	13.58" x 28.58" x 9.34" (345 x 726 x 237 mm)	120	750	6.3			30 lbs. (14 kg) 33 lbs. (15 kg) 21 lbs. (10 kg) 33 lbs. (15 kg)
	HWBRT-43			Thermostatic (ON/OFF lit		23 lbs. (11 kg)		
ard	HWBRT-43D HWBRN-43	40 5011 00 5011 0 0411	208	1200	5.8	rocker switch)	pilot light)	21 lbs. (10 kg) 21 lbs. (10 kg)
Standar Watt	HWBRN-43D	13.58" x 28.58" x 9.34" (345 x 726 x 237 mm)	240		5.0			21 lbs. (10 kg)
₹a		(4.2	220	1200	5.5			
Ś			240	1200	5.0			
	HWBHRT-43 HWBHRT-43D HWBHRN-43*	120		13.8		Not Available	30 lbs. (14 kg)	
Watt		13.58" x 28.58" x 9.34" (345 x 726 x 237 mm)	208	1650	7.9		Infinite (control with pilot light)	21 lbs. (10 kg) 30 lbs. (14 kg) 33 lbs. (15 kg)
>	HWBHRN-43D*		240		6.9	Thermostatic (ON/OFF lit		
High			220	1650	7.5	rocker switch)		
			240	6.9	6.9			

^{*208} or 240V only.

PRODUCT SPECS Drop-In 4/3-Size Heated Wells

The Drop-In 4/3-Size Heated Well – UR, C-UR Fabricator Components shall be a Modelas manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Drop-In 4/3-Size Heated Well shall be rated atwatts,volts, and be.... inches (millimeters) in overall width and beinches (millimeters) in overall depth. It shall consist of stainless and aluminized steel housing with a metal sheathed heating

element, EZ locking hardware for installation, and a remote thermostat with lighted power switch. Models with a drain consist of a 3/4" NPT drain.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350 www.hatcocorp.com | support@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library | Chat

TRT" added to model name indicates unit with thermostat control, lit rocker switch and 36" (914 mm) or 72" (1829 mm) capillary. "RN" added to model name indicates unit with infinite switch control, pilot light and 36" leads.

CE Mark not available.