

DishStar® HT

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approval _____
Date _____

DishStar® HT

Models

DishStar HT



Standard Features

- Automatic fill
- Push button start
- Fill and Dump design
- Built-in booster heater with Sani-Sure™ final rinse system
- Labyrinth type door design
- Automatic pumped drain for floor and wall drain installations
- Stainless steel wash pump
- Universal timer
- Deliming cycle
- Simplified controls allow easy access for operation and service
- Door switch
- One (1) each peg and combination rack included
- Above water scrap basket
- Built-in chemical pumps and priming switches

Mandatory Specs

Specify voltage _____

Options

- ☐ Water Hammer Arrestor
- ☐ Pressure Regulator
- ☐ Back Panel
- ☐ Drain Water Tempering Kit
- ☐ Scale Prevention System (SPS)
- ☐ Replacement Cartridge for SPS
- ☐ Casters (adds 3/4" to height)
- ☐ Tie Down

Accessories

- ☐ 36-Compartment Rack
 - ☐ 4-1/8" tall (105 mm)
 - ☐ 5-5/8" tall (143 mm)
 - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack
- ☐ Machine Stand
 - ☐ 6" (152 mm) high
 - ☐ 18" (457 mm) high

Specifications

Uses 1.1 gallons (4.2 liters) of water per rack
Uses 26.4 gallons (99.9 liters) of water per hour
Cleans 24 racks per hour
Two-minute automatic cycle
Powerful 1 hp wash pump motor
Fresh water rinse eliminates wash water contamination
Air insulated between body and stainless steel housing
Durable stainless steel construction

Notes:

A vent hood is not recommended above the Jackson DishStar HT as it does not produce excessive vapors. *Always check with the local building code to know what type of ventilation is required for commercial dish machine installations in your area.*


Normal operation of the DishStar HT generates steam that may escape from the door. Materials such as wood laminate, veneers, etc. are unsuitable for use in areas exposed to dishwasher steam and detergents. Stainless steel or other moisture-resistant shields are recommended for surfaces adjacent to DishStar HT sides and top.



Intertek



Intertek

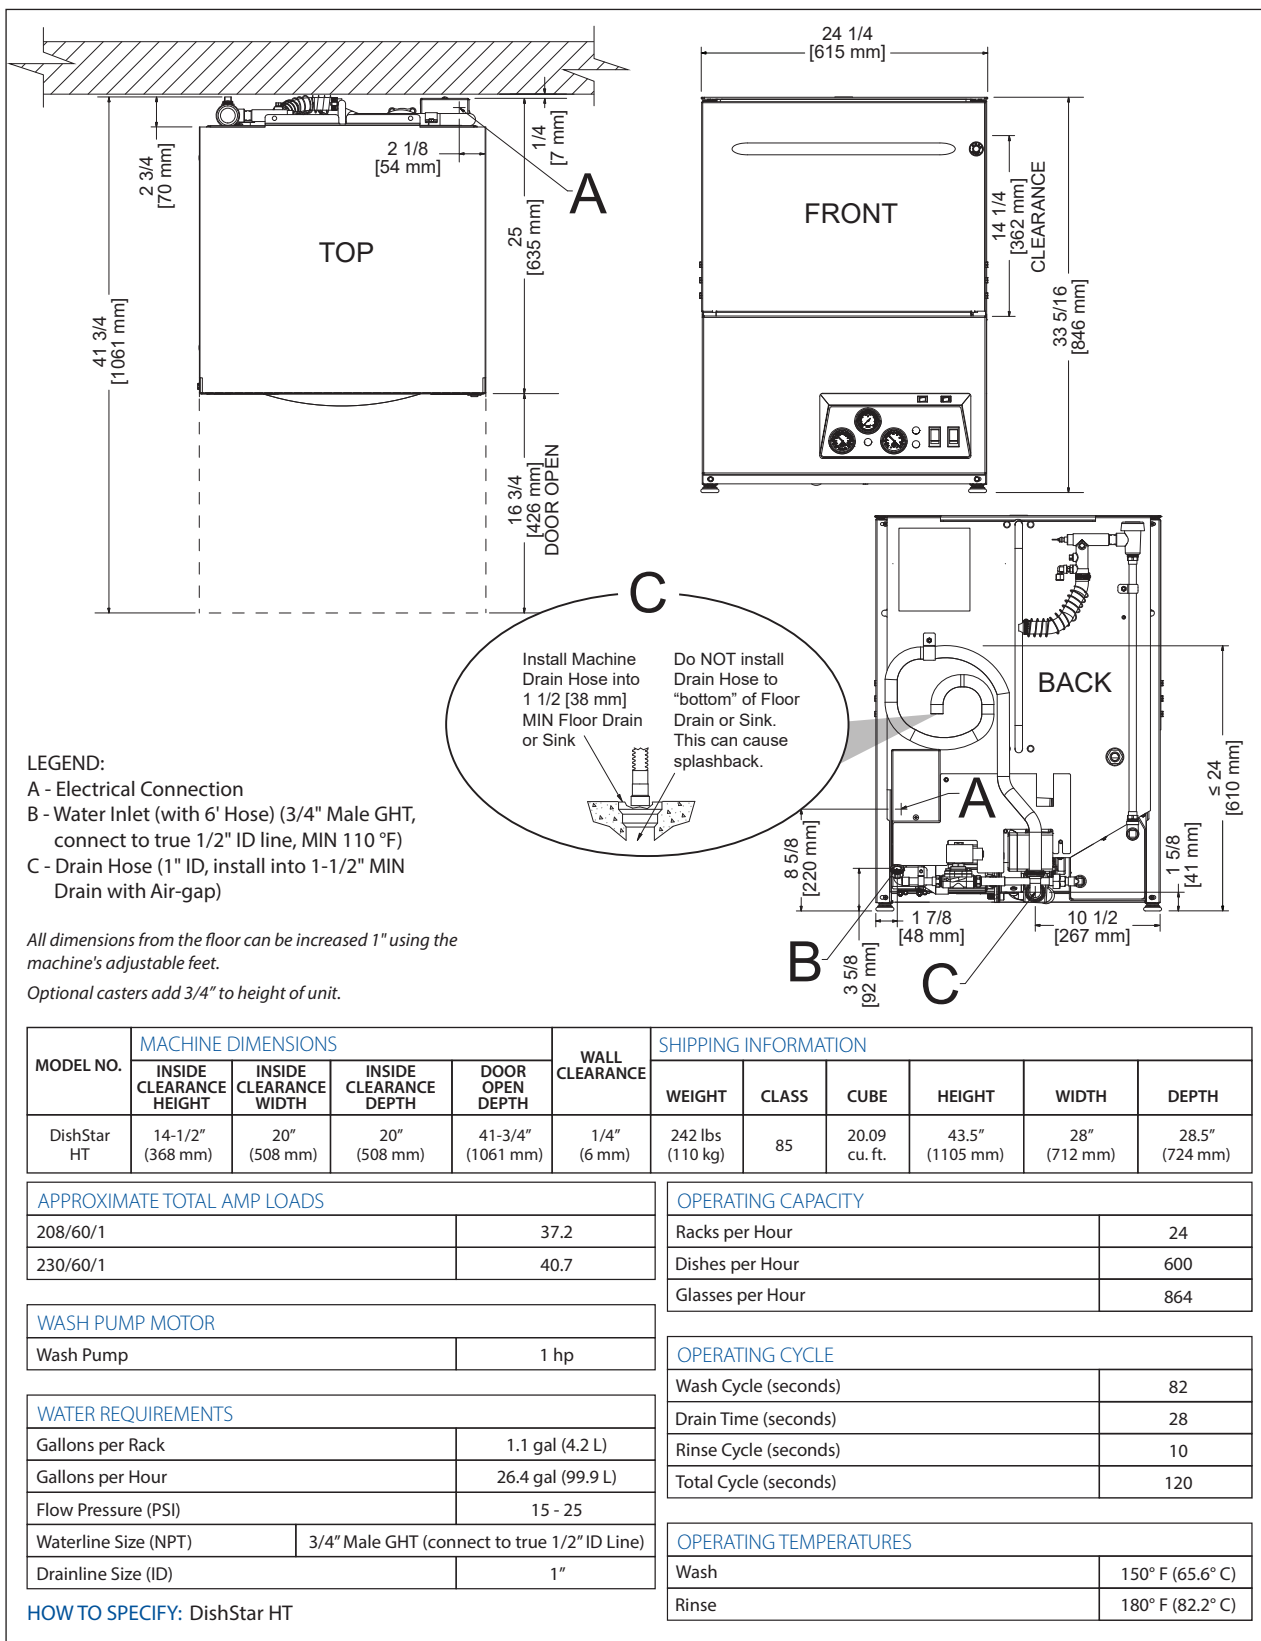

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O. Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-36-88 [11/16/2020]

www.jacksonwws.com

We reserve the right to change specifications in this bulletin without incurring any obligation for equipment previously or subsequently sold.