MANITOWOC[®]

USE0050 Square Cube Ice Machine




2110 South 26th Street Manitowoc, WI 54220

www.manitowocice.com







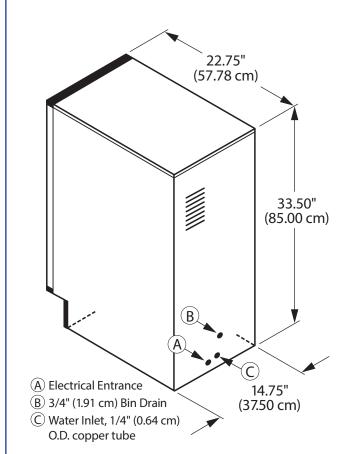

Installation Note - There is no minimum clearance required, designed to be integrated into cabinet opening 15.00" (38.00 cm) wide.

Ice Machine Electric

115/60/1 Factory pre-wired with a 6' (180 cm) power cord and NEMA 5-15P-plug configuration. **Total Amps:** 4.1

Max. fuse size: 15 amps

HACR-type circuit breakers can be used in place of fuses.

Specifications

BTU Per Hour:

1,145 (average) 2,300 (peak)

Compressor:

Nominal rating: 1/6 HP

Operating Limits:

- Ambient Temperature Range:
- 50° to 110°F (10° to 43°C)
- Water Temperature Range: 35° to 90°F (2° to 32°C)
- Water Pressure Ice Maker Water In:
- Min. 20 psi (138 kPA) Max. 80 psi (551 kPA)

Legs:

Levelers standard 0" to 1"

(0-2.5 cm) adjustability.

Optional legs (K-00345) 4.25"-6.00" (10.80-15.24 cm).

Insulation:

Insulation foamed-in-place with CFC-FREE foam.

	Model	Ice Shape	Ice Production in 24 Hours				
			70° Air/50° F Water 21° Air/10° C Water		90° Air/70° F Water 32° Air/21° C Water		Power - kWh/100 lbs @90°/70°F
			lbs.	kgs.	lbs.	kgs.	
	USE0050A	Square	45	20	35	15	22
	Water Usage: 100 gal (45.4 kgs of ice)						
	Potable Water: 50 gal (189 liters)						
"A" following model number indicates "Air" cooled condensing unit.							
Air	Flow Front Vi	ew	Front Access Control Panel			Water Filter	
Air in the right, air out left, no side, and vents			Machine automatically keeps the bin full. Choose delay start for optimal quietness. Machine automatically restarts.			0	Auto-bypass for easy change out. Replacement water filter is AR-2800 (K-00374 12 pk)

Welbilt reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street Manitowoc, WI 54220 Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com 7831A 12/2020

