



Item # _____

Job _____

METRO® MOBILE END LOAD “KNOCK DOWN” RACKS

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Tubular framework with aircraft-riveted slide assemblies.
- **Economical:** Shipped “knocked down” for reduced freight rate. Easily assembled with 12 bolts.
- **Sanitary:** Removable slide assemblies for easy cleaning.
- **Versatile:** Slide assemblies can be replaced with slides of other than standard spacing while retaining the same framework.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Stable:** 5" (127mm) diameter, NSF-listed casters, corner-mounted for maximum stability.
- **Lightweight:** Easy to handle.
- **Rapid Cooling**

NOTE: Available factory set-up. See price list.



RT183N



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



METRO® MOBILE
End-Load “Knock-Down Racks”


13.70



METRO® MOBILE END LOAD "KNOCK DOWN" RACKS

Specifications

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction on slide assemblies, tensilok fasteners for frame assembly.
- **End Frames:** 1" square x .093" (25x2.4mm) wall extruded aluminum tubing.
- **Tie Bars:** Left to right and front to back tie bars of 1" (25mm) diameter aluminum bar stock, drilled and tapped at each end.
- **Slides, 3" & 5" (75 & 127mm) Spacing:** .060"x1 1/4"x1 1/2" (1.5x32x38mm) profile, bulb-tipped extruded angle-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Slides, 1 1/2" (38mm) Spacing:** .060"x1 1/2"x1 1/2" (1.5x12.7x38mm) bulb-tipped, extruded channel-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Casters:** Two HS5M on back — 5" (127mm) diameter ball bearing swivel stem casters with self-lubricating axle. Two HS5MB on front — same as above with wheel brake. NSF listed.
- **Load Rating:** 20 lbs. (9kg) per level. Not to exceed 350 lbs. (159kg) per unit.

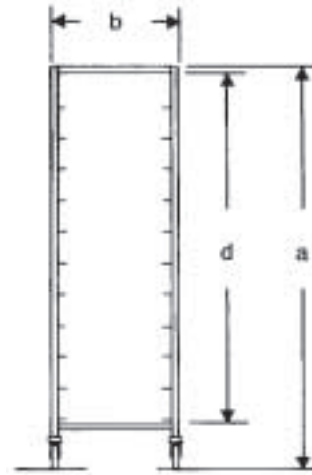

Dimensions

Cat. No.	(a) (b) (c) Height/Width/Depth			(d) Inside Height		Slide Spacing		Pan Capacity		Shipping Weight	
	(in.)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	No.	Size (in.)	(lbs.)	(kg)
RT183N	64 1/8	20 3/8	28	55 7/8	1420	3	76 or 36	18 14x18	18x26	53	24
RT115N	64 1/8	20 3/8	28	55 7/8	1420	5	127 or 22	11 14x18	18x26	50	23
RT1334N	64 1/8	20 3/8	28	55 7/8	1420	1 1/2	38	34	18x26	55	25

Accessories

Model	Description
SU	Factory Set-Up
A38	Gray Rubber Corner Bumpers

Manufactured by:



InterMetro Industries Corporation
 North Washington Street, Wilkes-Barre, PA 18705
 Phone: 570-825-2741 • Fax: 570-825-2852
 For Product Information Call: 1-800-433-2232
 Visit Our Web Site: www.metro.com

L02-081
 Rev. 9/00
 Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

