




Item # \_\_\_\_\_

Job \_\_\_\_\_

METRO MOBILE  
ROLL-IN REFRIGERATOR  
RACKS  
Model RF Series

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Aircraft-riveted construction throughout . . . means additional strength.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Sized To Fit Refrigerator:** Rack rolls directly into refrigerator for quick and easy storage. You save valuable handling time and expensive labor costs.
- **Lightweight and Freewheeling**
- **Sanitary:** Easy to clean.
- **Rapid Cooling Saves Energy**

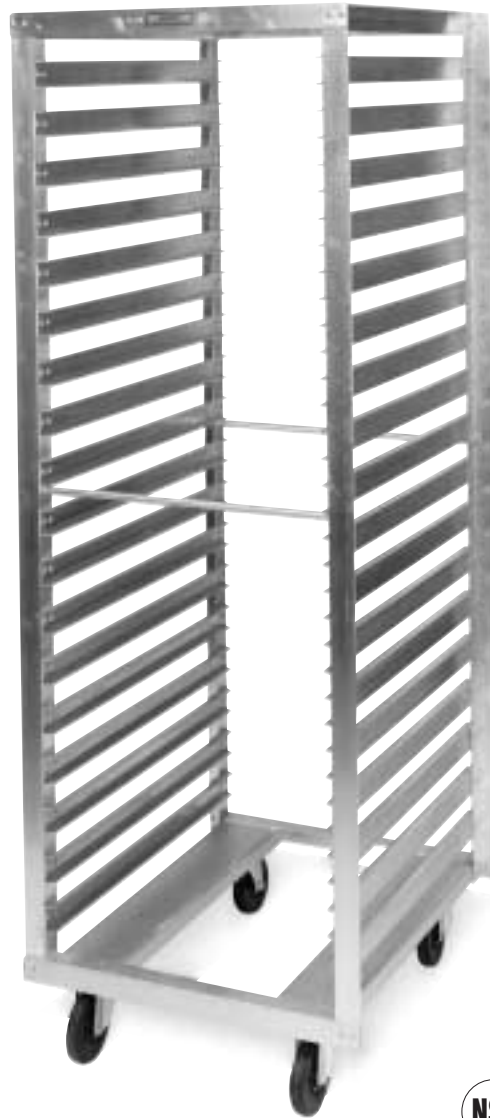

RF13N



METRO MOBILE  
Roll-In Refrigerator Racks Model RF Series



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com

Copyright © 2000 InterMetro Industries Corp.

13.80



# METRO MOBILE ROLL-IN REFRIGERATOR RACKS

## Specifications

**Materials:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).


**Construction:** Pass-thru design, aircraft-riveted construction throughout.

**Corner Posts:** 1½" x 1½" x ⅛" angle-shape. (Except RF20N, RF29N: 1" x 1½" x ⅛")

**Top & Bottom:** 1½" x 1½" x ⅛" angle-shape riveted to four corner posts. (Bottom closed on RF78N.)

**Casters:** Two A5L on back — 5" ball bearing swivel, self-lubricating axle, rubber-wheeled, zinc-plated, bolted to full-length 14-gauge channel to bottom frame. Two A5LB on front — same as above with wheel brake. (Except two B5DN and two B5DNB on RF78N.)

**Slides:** RF3N and RF23N, .060" x 1¼" x 1½" bulb-tipped angle. RF13N and RF20N, .060" x ½" x 1½" extruded aluminum channel. RF29N, 18-gauge x ½" x 1½" stainless steel channel. RF78N, 12 sets extruded vari-slides, adjustable on 1½" centers, 3" minimum slide spacing.

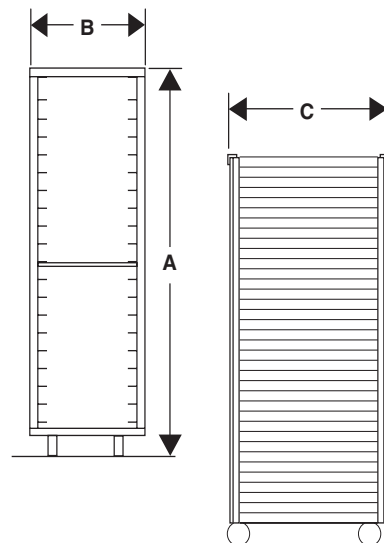

## Dimensions

(A) Height (in.)	(mm)	Without Bumper		With A33 Bumper		Slide Spacing		Pan Capacity		Shipping Weight		Cat. No.				
		(B) Width (in.)	(mm)	(C) Depth (in.)	(mm)	(in.)	(mm)	No.	Size (in.)	(lbs.)	(kg)					
64	1600	21¼	540	26	660	23¼	590	28	710	1½	38	36	18x26	44	20	RF13N
64	1600	21⅝	543	26	660	23⅝	595	28	710	3	76	18	18x26	55	25	RF3N
64	1600	21⅝	543	26	660	23⅝	595	28	710	5	127	11	18x26	43	19	RF23N
64½	1610	24⅝	630	26	660	26⅝	670	28	710	See Note 1		See Note 1		92	41	RF78N

**NOTE:** Swivel casters, two with brakes, are standard on the units listed above.

**NOTE 1:** Pan capacity with 12 sets of slides on 4½" centers.

## Accessories

Description	Model
Gray Continuous Bumper	A33RD
Gray Corner Bumpers	A37
Floor Lock with B5DN/B5DNB Casters Only	A71
Extra Vari-Slides for RF78N	A121

No.	2 per slide		No.	1 per slide	
	Size (in.)	Size (in.)			
24	10⅞x19¾	15x20	12	15x20	
24	11⅞x20	18x26	12	18x26	
24	12x18	20x20	12	20x20	
24	12x20	20x22	12	20x22	
24	13x18	20x24	12	20x24	
24	14x18				

Manufactured by:



**InterMetro Industries Corporation**

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: [www.metro.com](http://www.metro.com)

L02-085  
Rev. 4/00  
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

