





Stainless Solid

Key Features

- Industry Exclusive: U-Choose[™] feature offers five levels of ice density
- Industry Leading: Produces up to 90 lb of ice per day
- Industry Leading: Stores 30 lb of ice
- Eco friendly most efficient type of specialty ice
- Makes cylindrical compressed ice bits approx. 3/4" L x 1/2" H
- Digital touch pad control with blue LED display
- Indicator alert notifies user when cleaning is needed
- Bright white LED lighting

- White interior
- Stainless steel cabinet, toe-kick, and full-wrap door
- Stainless steel handle (7/8" diameter)
- Easiest nugget ice machine cleaning process in the industry
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs
- Factory installed drain pump model recommended if a gravity drain is not accessible

Model Details


Model	Voltage/Hz	Door Swing	Pump	Finish	Shipping Weight
UONB115-SS01B	115 / 60	Field Reversible	-	Stainless Solid	96 lb
UONP115-SS01B	115 / 60	Field Reversible	Pump Included	Stainless Solid	101 lb


Accessories

Model	Description	Finish	Shipping Weight
ULANUGGETCLEAN	Nugget Ice Cleaner (Single 8 oz. bottle)	N/A	1 lb
ULAWATERHOOKUP	Braided Water Supply Line Kit	N/A	2 lb

28" (711 mm) 34" to 35" (863 mm to 889 mm)

Front

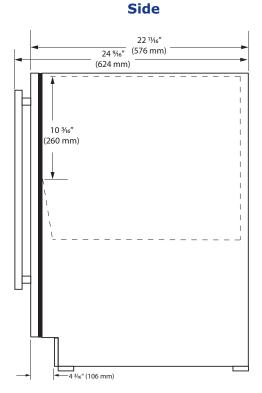

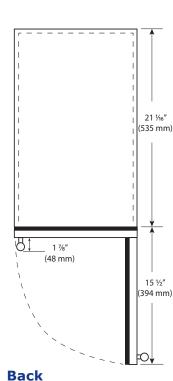


Top

Specifications

Model	ONB115
Amps: Running	3
Dimensions: Product Depth	22 ¹¹ / ₁₆ " / 576 mm
Dimensions: Product Height	34" / 863 mm
Dimensions: Product Width	14 ¹⁵ / ₁₆ " / 379 mm
ENERGY STAR	Yes
Ice Production Per Day	90 lb
Ice Storage	30 lb
Product Weight: Max	101 lb
Refrigerant Type:	R600a
Sabbath (Star K Certified)	Yes

7 ½" (191 mm) Drain (191 mm) Drain (102 mm) Power Cord 6 ft (183 cm) (102 mm) Power Cord 6 ft (183 cm) (102 mm)

Cabinet Cut-Out



Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



Installation Notes

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow







