LOW HEIGHT SELF-CONTAINED BACK BAR REFRIGERATOR 1-, 2-, 3- and 4-Door











BBSLP60 with stainless steel door shown

| JOB | |
|-----------|--|
| AREA | |
| ITEM NO. | |
| MODEL NO. | |

| MODELS | | | | |
|----------|--------------|--|--|--|
| BBSLP36 | 1-Door Model | | | |
| BBSLP60 | 2-Door Model | | | |
| BBSLP84 | 3-Door Model | | | |
| BBSLP108 | 4-Door Model | | | |

NSF/ANSI Standard 7 Listed for open food storage. Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.

KEY PRODUCT FEATURES AND BENEFITS

- Low Profile 29" total height, designed for areas where space constaints do not allow for a standard height
- Stainless steel interior and top standard on all Perlick Back Bar refrigeration for long life durability and easy to clean hygienic storage
- 2" foamed-in-place eco-friendly insulation provides energy savings with zero ozone depletion
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage
- End wall compressor and evaporator design increases storage capacity by 14% compared to top mounted designs
- Anti-Sweat heaters in cabinet face prevents condensation from forming on door, extending door gasket life and protecting flooring below from damage or slip hazards
- Multiple door styles available in any compartment
 - Choose between Glass, Stainless-Steel, Black Vinyl, or Customer Provided Overlay
 - Drawers not available on low profile models

Quick Features:

- Integrated door locks standard on all units
- Choose compressor mounted on left or right side of cabinet to match your space
- NSF Rated digital controller allows for easy and precise temperature changes
- Choose between three temperature ranges
 - Refrigerator (34°F-42°F) Factory set to 38°F
 - White Wine (40°F-65°F) Factory set to 45°F
 - Red Wine (40°F-65°F) Factory set to 60°F
- · Choose between 6000K white LED lighting or cool blue display lighting
- Choose between Full Length, 6" Chrome, or pull tab style handles
- Choose between flat shelving and wine racks for each compartment
- 1 Year Parts and Labor Warranty, 5 Year Compressor Warranty
- Made in USA



LOW HEIGHT SELF-CONTAINED BACK BAR REFRIGERATOR 1-, 2-, 3- and 4-Door

| MODEL NUMBERS | | BBSLP36 | BBSLP60 | BBSLP84 | BBSLP108 |
|---------------------------------------|---|----------------------|----------------------|----------------------|----------------------|
| NUMBER OF COMPARTMENTS | | 1 | 2 | 3 | 4 |
| EXTERIOR CABINET DIMENSIONS | Length - in. (mm) | 36 (914) | 60 (1524) | 84 (2134) | 108 (2743) |
| | Depth - in. (mm) | 24¾ (629) | 24¾ (629) | 24¾ (629) | 24¾ (629) |
| | Height - in. (mm) | 29 (736) | 29 (736) | 29 (736) | 29 (736) |
| INTERIOR CABINET DIMENSIONS | Length - in. (mm) | 20 (508) | 44 (1118) | 68 (1727) | 92 (2337) |
| | Depth - in. (mm) | 18¾ (476) | 18¾ (476) | 18¾ (476) | 18¾ (476) |
| | Height - in. (mm) | 257/16 (646) | 25% (646) | 25% (646) | 257/16 (646) |
| INTERNAL VOLUME Net. Cu. Ft. (Litres) | | 6.2 (176) | 13.3 (377) | 20.7 (586) | 27.9 (790) |
| PRODUCT CAPACITY | CASE PACKED - 12 OZ. BOTTLE/CAN | 98/196 | 238/448 | 371/721 | 504/973 |
| | STAGGERED - 12 OZ. BOTTLE/CAN | 112/220 | 268/268 | 420/812 | 572/1100 |
| SHIPPING WEIGHT Lbs. (kg.) | | 223 (101) | 300 (136) | 431 (195) | 590 (267) |
| ELECTRICAL SPECIFICATIONS | Electrical Supply | 120 VAC/60 Hz/1 Ph |
| | Running Load Amps | 1.8 | 2.5 | 4.2 | 4.2 |
| | Electrical Connection | Cord connected | Cord connected | Cord connected | Cord connected |
| | Cord Plug Type | NEMA 5-15 | NEMA 5-15 | NEMA 5-15 | NEMA 5-15 |
| | Cord Length | 8' | 8' | 8' | 8' |
| | Defrost Initiation | Automatic | Automatic | Automatic | Automatic |
| | Defrost Type | Off cycle | Off cycle | Off cycle | Off cycle |
| | Thermostat | Digital control | Digital control | Digital control | Digital control |
| | Lighting Type | LED | LED | LED | LED |
| REFRIGERATION SPECIFICATIONS | Horsepower | 1/6 | 1/5 | 1/4 | 1/4 |
| | Refrigerant | R290 | R290 | R290 | R290 |
| | Refrigerant Charge (grams) | 90 | 100 | 90 | 90 |
| | Heat Rejection at 75F | 900 | 1900 | 1900 | 2300 |
| | Factory Temperature Setting - Refrigerator F (C) | 36° (2.2°) | 36° (2.2°) | 36° (2.2°) | 36° (2.2°) |
| | Temperature Range - Refrigerator F (C) | 33°-46° (0.5°-7.7°) | 33°-46° (0.5°-7.7°) | 33°-46° (0.5°-7.7°) | 33°-46° (0.5°-7.7°) |
| | Factory Temperature Setting - White Wine F (C) | 45° (7.2°) | 45° (7.2°) | 45° (7.2°) | 45° (7.2°) |
| | Factory Temperature Setting - Red Wine F (C) | 60° (15.5°) | 60° (15.5°) | 60° (15.5°) | 60° (15.5°) |
| | Temperature Range - Wine F (C) | 40°-65° (4.4°-18.0°) | 40°-65° (4.4°-18.0°) | 40°-65° (4.4°-18.0°) | 40°-65° (4.4°-18.0°) |
| | Condensing Unit Location | Left or Right | Left or Right | Left or Right | Left or Right |
| | Expansion Device | Capillary tube | Capillary tube | Capillary tube | Capillary tube |
| | Pull-Out Condensing Unit | Yes | Yes | Yes | Yes |
| | Front Vented | Yes | Yes | Yes | Yes |


Wine Temperature refrigerators do not carry NSF Rating for open food storage.


Wine Temperature units are NSF certified for non-potentially hazardous bottled and canned beverage storage.

LOW HEIGHT SELF-CONTAINED BACK BAR REFRIGERATOR 1-, 2-, 3- and 4-Door

Note: Open floor drain not provided on models intended for non-packaged food.

Low Height Self-Contained Back Bar

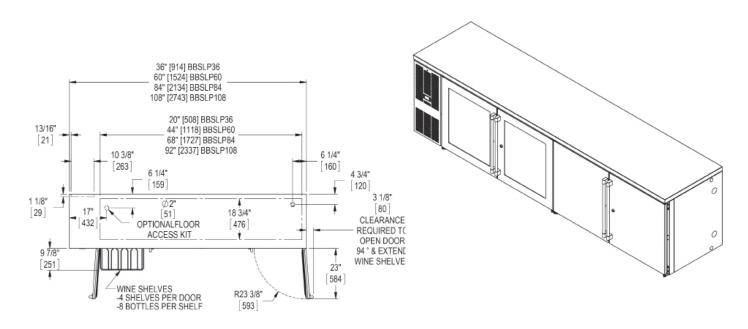

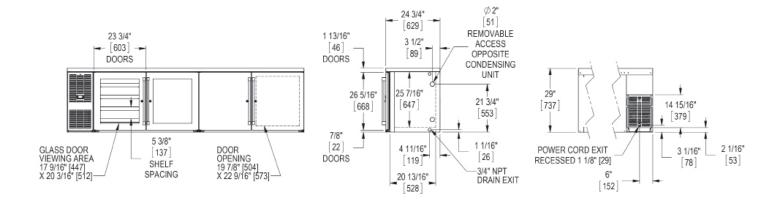

California Prop 65 Notice:

