

JOB _____ ITEM # _____ QTY # _____

MODEL NUMBER
☐ DO-16-G

☐ DO-18-G


DO-16-G

Our large-scale double ovens are designed for easy operation and energy efficiency. If you need a reliable work-horse to produce quality baked goods, look no further than the DO-16- G from Super Systems. Created with the highvolume bakery in mind, the individually controlled decks give our best hearth bake, while the handy reminder timer and full-view glass doors eliminate production hassles.

STANDARD FEATURES

- ◆ 2 Individually controlled 8 pan ovens
- ◆ Glide doors allow individual access to oven sections for loading and unloading, maintaining consistent baking temperatures and higher energy efficiency
- ◆ Natural convection & radiant heat design does not dry out product
- ◆ Each deck individually thermostatically controlled - provides more control over your baking environment
- ◆ No moving parts in oven reduces maintenance problems and increases reliability
- ◆ Bake pizzas right on deck
- ◆ Stainless steel construction easily cleaned and maintained
- ◆ Positive magnetic door closure
- ◆ 60 Minute reminder timer
- ◆ Full-view, heat-reflective tempered glass door allows for energy-efficient sight baking
- ◆ Field reversible doors, left or right hinged
- ◆ Each deck brightly lighted provides sight merchandising
- ◆ Maximum Oven Temp 450°

DIMENSIONS

◆ 69"H x 91"W x 36"D

CONSTRUCTION

The oven corner posts shall be 18 gauge stainless steel with a 20 gauge stainless steel wrapper for top, sides and back panels. The interior oven cavity shall be constructed of heat retentive 18 gauge aluminized steel with chrome plated wire racks on .190 aluminum decks.

The oven shall work with a patented "Heat Sink" principle and "Natural Convection" technology. When the materials in the oven are heated to the proper temperature the oven shall bake with radiant heat and conduction. The oven shall also have heat release vents that draws air through the oven cavity and over decks.

The oven shall have no moving parts. Each deck shall be individually, thermostatically controlled. The oven shall have a heat reflective tempered glass door.

VERSATILE

- ◆ Bake on deck or use half or full size pans
- ◆ Bake pizza right on the deck
- ◆ Sub rolls
- ◆ Muffins


WARRANTY

- ◆ One year parts and labor. Warranty is detailed on inside front cover of the price list.

SPEC P-6

PIPER PRODUCTS
 BUILT TO LAST
www.piperonline.net

300 S. 84th Avenue
 Wausau, WI 54401
 Phone: 800-544-3057
 Fax: 715-842-3125

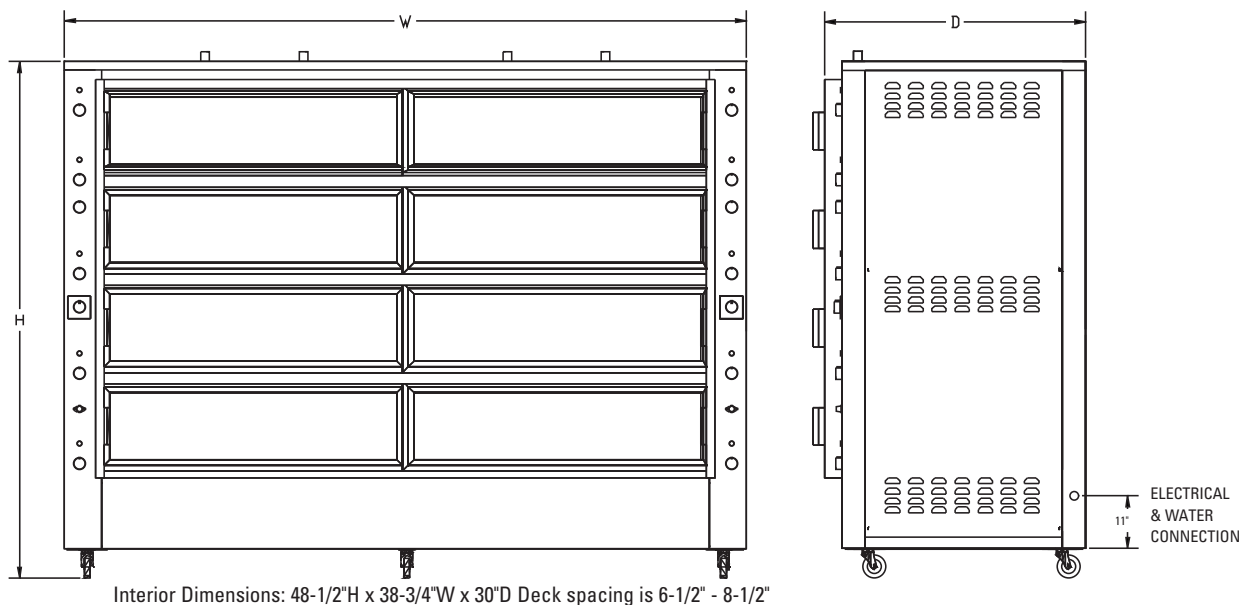

	VOLTS	PHASE	WIRE**	AMPS	WATTS	HERTZ
10 Standard Two Circuit	120/208	1	3	62	25,320	60
	120/240	1	3	54	25,320	60
30 Standard One Circuit	120/208	3	4	84	25,320	60
	120/240	3	4	72	25,320	60
30 Optional Two Circuit	120/208	3	4	42	25,320	60
	120/240	3	4	36	25,320	60

*Units are shipped without cord and plug. Designed to be hard wired. Installation requires a 4" clearance around the entire unit and should be made by a licensed electrician. Check local codes for vent hood requirements.

** Number of wires does not include ground.

OPTIONS / ACCESSORIES

- ◆ High Volume Steam Injection. Please see Steam specification sheet for electrical requirements.

PLEASE NOTE: Steam is available for top section only. Please specify doors hinged left or right. Hinged left is standard.

CAPACITY

OVEN ACCOMMODATES:

- ◆ 16 - standard 18" x 26" sheet pans
- ◆ 32 - four-strapped 1 lb. bread pans
- ◆ 24 - four-strapped 1.5 lb. bread pans
- ◆ 96 - 9" pies
- ◆ maximum oven temp. 450°

OPTIONS / ACCESSORIES

- ☐ High Volume Steam Injection. (Call the factory for additional electrical and plumbing requirements.)

SHIPPING INFORMATION

- ◆ Shipping weight: 1800 lbs.
- ◆ Cubic feet: 130.34
- ◆ Freight class: 100
- ◆ Crated dimension: 78-1/2"H x 73-1/2"W x 41"D