



**HIGH TEMPERATURE GLASSWASHER  
PKHT24**



JOB
AREA
ITEM NO.
MODEL NO.

<b>Models</b>
PKHT24

**KEY PRODUCT FEATURES AND BENEFITS**

- Removes lipstick and other residue for the cleanest glasses
- All stainless steel construction with 16-gauge stainless steel wash tank
- Cleans and sanitizes 600 glasses per hour or 30 racks (20 glasses per 20 x 20 rack)
- Uses only .75 gallons of water per cycle
- Booster heater increases the hot water temperature by 70°F for the three-minute rinse cycle
- Detergent and rinse chemical pumps
- Fresh water rinse through upper and lower arms – rotating arms provide maximum glass surface coverage
- Removable stainless steel pump protection screen for easy cleaning
- Large 11-1/4-inch door opening and raised wash chamber to reduce bending over to remove racks
- Top-mounted controls for easy operation and temperature monitoring
- Comes standard with 6-inch legs to raise height; 4-inch legs available as an option

**Available option:**

- Second year extended parts and labor warranty (includes one (1) year parts and labor warranty)

**Note:** Some US States may require Energy Star ratings for Commercial Dishwashers. The specifier or installer is responsible for knowing their local codes, standards, and regulatory requirements. This product was certified and met the requirements of previous Energy Star Version 2.0 for commercial dishwashers as required by some states.



# HIGH TEMPERATURE GLASSWASHER


## PKHT24

<b>WATER CONSUMPTION, GALLONS (LITERS)</b>	<b>Per Rack</b>	.75 (2.83)
	<b>Per Hour</b>	17.9 (67.6)
<b>OPERATING CYCLE</b>	<b>Wash Time, Seconds</b>	94
	<b>Rinse Time, Seconds</b>	16
	<b>Dwell Time, Seconds</b>	10
	<b>Total Cycle Time</b>	2 Minutes
<b>OPERATING CAPACITY</b>	<b>Glasses per Hour</b>	600
	<b>Wash Tank Capacity, Gallons</b>	2.5 (9.46)
	<b>Pump Capacity, Gallons per Minute (lt)</b>	38 (144)
<b>WATER REQUIREMENTS</b>	<b>Required Minimum Temperature*</b>	110°F (43°C)
	<b>Recommended Temperature**</b>	140°F (60°C)
	<b>Water Inlet, Inches (mm)</b>	1/2 NPTM (127)
	<b>Drain Connection, Inches (mm)</b>	1 (254) IPS PVC socket to include an air gap
	<b>Rinse Pressure Set</b>	20 +/- 5psi (1.41 kg/cm <sup>2</sup> )

<b>CYCLE TEMPERATURES</b>	<b>Wash</b>	150-160°F (65.5-71°C)
	<b>Rinse</b>	180-195°F (82-90°C)
<b>FRAME DIMENSIONS</b>	<b>Depth, Inches (mm)</b>	25 (635)
	<b>Width, Inches (mm)</b>	24 (610)
	<b>Height, Inches (mm)</b>	33-1/4 (845)
	<b>Maximum Clearance For Dishes, Inches (mm)</b>	11-1/4 (286)
<b>WASH PUMP MOTOR</b>	1 HP NEED	
<b>ELECTRICAL RATING</b>	<b>Volts</b>	208 U.S./230 Metric
	<b>Hz</b>	1 PH-60 Hz
<b>Must connect to 50 amp supply circuit.</b>	<b>Total Amps</b>	33
	<b>Booster Heater KW</b>	5.3 kw U.S./ 6.5 kw Metric
<b>This system requires three power wires, which includes a current-carrying neutral wire. An additional fourth wire must be provided for grounding the machine.</b>		
<b>APPROXIMATE SHIPPING WEIGHT, Lbs. (kg)</b>	234 (106)	
<b>Energy Star Rating</b>	2.0	

\* For machine having Safety-Temp feature

\*\* For faster heat recovery

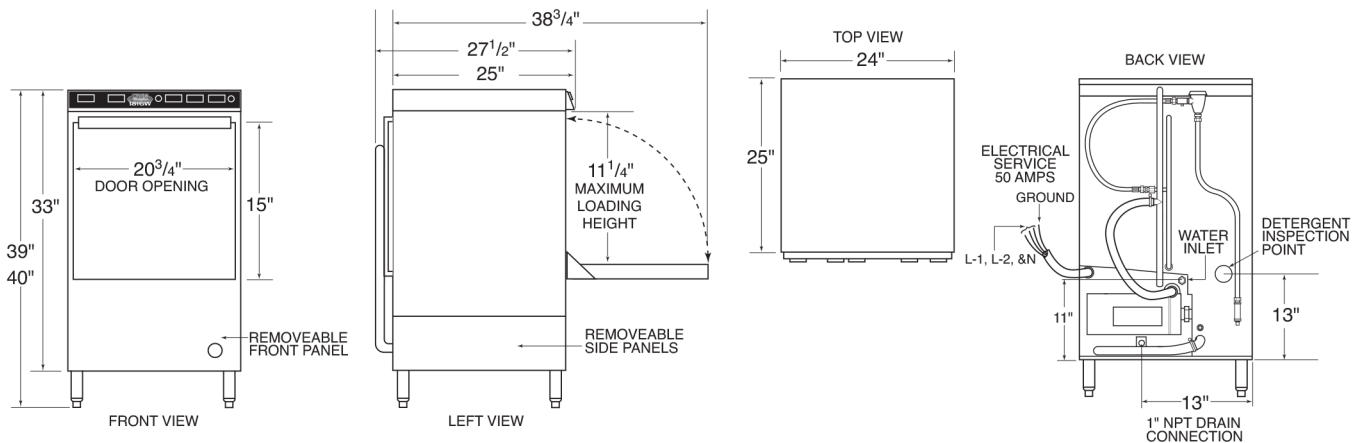

**Warning:** Electrical and plumbing connections must be made by a qualified service person who complies with all federal, state and local health, electrical, plumbing and safety codes.