



PSB Shown with optional PSBS3 and casters.

Model Numbers PSB36 PSB48 PSB60


PROFESSIONAL COUNTERTOP BROILER


- Individual controlled 22,000 BTU stainless steel burner.
- Burners are located every 6" for even heating throughout the full width of the broiler.
- Removable cast iron radiant covers for easy cleaning. Stainless steel radiant covers are a not cost option when ordered at the time of the unit.
- Newly designed 4 position cast iron top grates are standard and offer various height options throughout the width of the broiler.
- Full width grease gutter with large grease chute to drip pan.
- Full width stainless steel extra deep drip pan.
- · All control components are made from solid brass.
- · Available in either floor or countertop models.

EXTERIOR FEATURES

- Designed and built with heavier gauge 304 stainless steel for durability and long service life.
- · All seams are 100% welded and polished.
- · Newly designed die cast metal knobs for ease of use.
- · Designed so it can be used on refrigerator base.



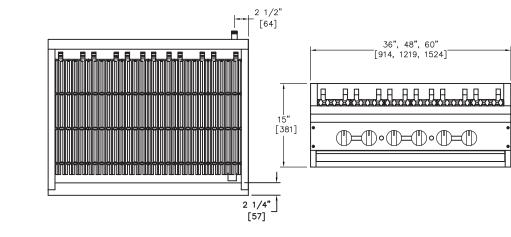



PROFESSIONAL COUNTERTOP BROILERS

MODEL	RADIANT BROILERS (R) (S)			
	BURNERS	GAS OUTPUT BTU	WIDTH	SHIP WEIGHT LBS
PSB36	6	132,000	36"	370
PSB48	8	176,000	48"	460
PSB60	10	222,000	60"	605

MODEL	DIMENSIONS	CRATED DIMENSIONS
PSB36	36" W X 30" D X 15-3/8" H 915MM X 762MM X 405MM	37-3/4" W X 34-1/2" D X 22" H 959MM X 876MM X 559MM
PSB48	48" W X 30" D X 15-3/8" H 1219MM X 762MM X 405MM	49-3/4" W X 34-1/2" D X 22" H 1264MM X 876MM X 559MM
PSB60	60" W X 30" D X 15-3/8" H 1524MM X 762MM X 405MM	61-3/4" W X 34-1/2" D X 22" H 1569MM X 876MM X 559MM



EXTERIOR

- Stainless steel front, sides, stub back, landing ledge and cabinet
- · Welded and polished stainless steel seams
- Control knobs are durable die cast metal knobs
- Optional 6" (152 mm) heavy duty legs with adjustable feet
- · One year parts and labor warranty
- 3/4" rear gas connection for single unit connection
- 3/4" Gas shut off valve
- 3/4" Gas pressure regulator

OPTIONS AND ACCESSORIES

- · Stainless steel center shelf in open cabinet base
- Quick disconnect and flexible gas hose, 3/4" or 1-1/4", N.P.T.
- · Stainless steel equipment stand for modular unit
- 6" (152 mm) casters for stainless steel stand

