



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



TCM-46

OPTIONS:

- 14 gauge tops
- Internal Locking device
- Condensate evaporator
- 8" deep pan liner
- Foodshields
- Workshelves
- Trayslides
- False Bottom
- Sliding/Hinged doors
- Tray Slides
- Stainless steel legs
- 8'-10' cord and plug
- Food pans/adaptor bars and panels - see Top Equipment Section in Price List.
- Veneered plastic laminate panels on body
- Powder coat paint colors
- Drain and condensing unit on operator's left
- Kickplates SS or PG

DUKE MANUFACTURING CO.

2305 N. Broadway
 St. Louis, MO 63102
 800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com
 SS-1052 Thurmaduke Cold Mech Ice

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke™ Serving Systems - Cold Pan Mechanically Assisted Ice - 5" Deep

- **TCM-32** 32" length unit
- **TCM-46** 46" length unit
- **TCM-60** 60" length unit
- **TCM-74** 74" length unit
- **TCM-88** 88" length unit

TOP:

- 16 gauge, 300 Series stainless steel
- Edges flanged down 2" at 90° - all four sides
- Inside edges flanged down 90° against liner

COLD PAN LINER:

- 300 Series stainless steel - 5" deep
- Insulated on all four sides and bottom
- 1" drain pipe and shut-off valve on operator's right

REFRIGERATION:

- Condensing unit below top on operator's right
- Stainless steel louvered grille for air circulation
- Copper coils attached to bottom of 5" liner
- 6' electric cord and plug - NEMA 5-15
- 120 volt - 1 Phase
- R448a refrigerant
- Necessary controls for operation

BODY:

- Stainless steel body
- Paint Grip
- Choice of available powder coat paint colors
- Operator's side open to bottom shelf
- Customer side and ends fully enclosed
- Bottom shelf paint grip or stainless steel to match body

AGENCY LISTINGS:




Specification subject to change


 **WARNING** For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

Thurmaduke®

Serving Systems - Cold Pan Mechanically Assisted Ice - 5" Deep

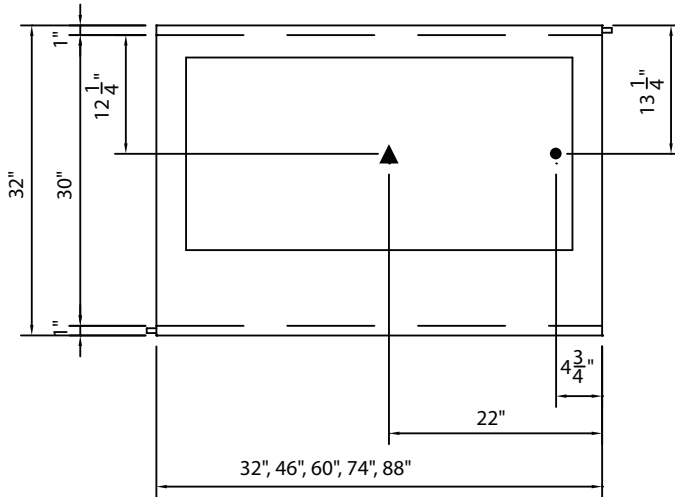

TOP VIEW

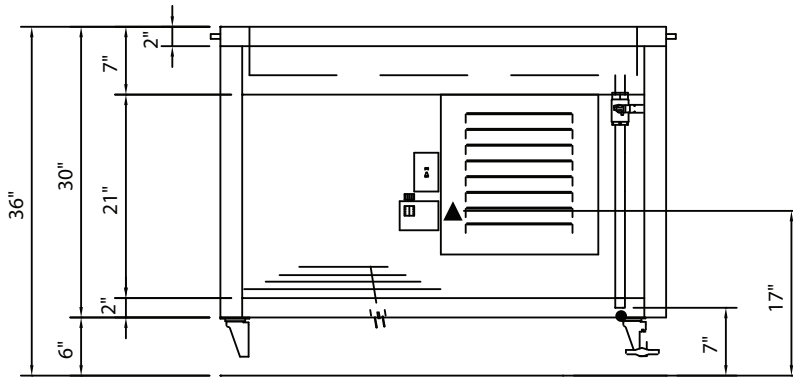


FRONT VIEW

LEGEND	
▲	ELECTRICAL CONNECTION
●	DRAIN LOCATION

ELECTRICAL SPECIFICATIONS:

Model	120 Volt/NEMA 5-15	
	Amps	HP
TCM-32	5.15	1/4
TCM-46	5.15	1/4
TCM-60	5.15	1/4
TCM-74	5.15	1/4
TCM-88	5.15	1/4

(Consult factory 3-phase electrical requirements and other options:)

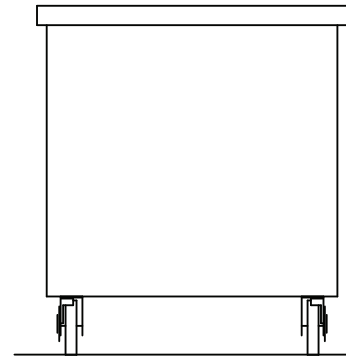

RIGHT SIDE VIEW

DIMENSIONS: All Units: Height - 36" (91.4 cm), Width - 32" (81.3 cm)

FREIGHT CLASS: 150

Model	Body Length		Cold Pan Liner Dimensions						Cube ft. crated	Weight	
			Length		Width		Depth			lbs	kg
	in	cm	in	cm.	in	cm	in	cm			
TCM-32	32	81.3	26	66.0	19-7/8	50.6	5	12.7	34.8	255	115.9
TCM-46	46	116.8	40	101.6	19-7/8	50.6	5	12.7	47.7	354	160.9
TCM-60	60	152.4	54	137.2	19-7/8	50.6	5	12.7	60.5	425	193.2
TCM-74	74	188.0	68	172.7	19-7/8	50.6	5	12.7	73.3	518	235.5
TCM-88	88	223.5	82	208.3	19-7/8	50.6	5	12.7	86.2	580	263.4



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com