

SCFF237



Product Features:

Commercially approved Commercial construction meeting UL commercial listing standards Complete stainless steel construction Interior and exterior are entirely constructed from stainless steel for lasting durability and easy cleanup Forced air cooling Top-mounted commercial fan ensures rapid temperature recovery Automatic defrost with adjustable cycle Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup defrost Closes to save energy but will remain open when the door is opened at a 90° angle for easier Self-closing door loading Open door alarm Alarm will beep 3 times if the door is left open for 30 seconds, 5 times at 60 seconds, and will sound continuously if the door is open for more than 5 minutes Temperature alarm Visual and audible alarms alert if the interior temperature rises or falls out of set range 6 inch casters 6 inch casters Digital controls with a large LED readout in Celsius or Fahrenheit for intuitive temperature Microprocessor control panel management

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

83.75" x 27.5" x 31" (H x W x D)

23 cu.ft. commercial reach-in all-freezer in complete stainless steel

Highlights:

Commercially listed to NSF standards

Stainless steel interior and exterior cabinet for true durability in high traffic commercial settings


Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading






SCFF237 Specifications:

| Overview | |
|-------------------------------|------------------------|
| Height of Cabinet | 83.75" (213 cm) |
| Width | 27.5" (70 cm) |
| Depth | 31.0" (79 cm) |
| Depth with Handle | 32.75" (83 cm) |
| Depth with door at 90° | 56.5" (144 cm) |
| Capacity | 23.0 cu.ft. (651 L) |
| Defrost Type | Frost-Free |
| Door | Stainless Steel |
| Cabinet | Stainless Steel |
| US Electrical Safety | UL |
| Canadian Electrical Safety | ULC |
| Sanitation | ETL-S |
| Amps | 8.0 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 273.0 lbs. (124 kg) |
| Shipping Weight | 293.0 lbs. (133 kg) |
| Estimated Time to Ship | 1 to 2 days |
| Parts & Labor Warranty | 2 Years |
| Compressor Warranty | 5 Years |
| Freezer | |
| Door Swing | RHD |
| Reversible | No |
| Interior Height | 51.5" (131 cm) |
| Interior Width | 23.5" (60 cm) |
| Interior Depth | 27.0" (69 cm) |
| Shelf Type | Wire |
| Shelf Qty | 4 |
| Adjustable Shelves | Yes |
| Thermostat Type | Digital |
| Interior Light | Yes |
| Fan Type | Interior |
| Refrigerant Type | R290a |
| Refrigerant Amount | 3.5 oz. |
| Wheels | 4 |
| Temperature Range | -10 to 25°F |
| | |

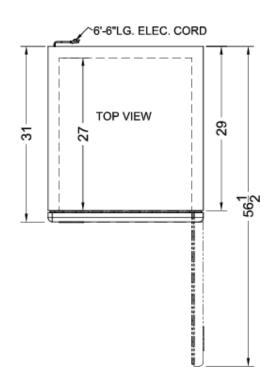





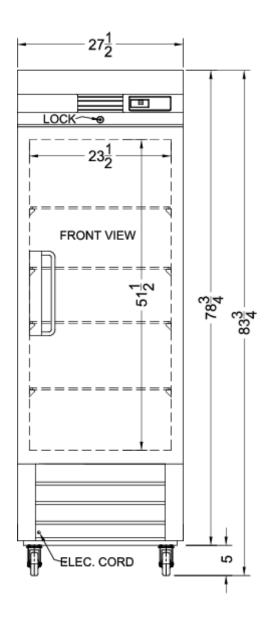

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com

