Tes

T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3142-VF05

Item No.

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content)

Sheet: 1 of 2

ANSI A117.1 (ADA)

UL 1951

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

TS.	This Spac	e for Architect/Engineer App	oroval
ChekPoint*	Job Name		_Date
ADA Compliant	Model Specified	d	Quantity
Cold	Customer/Who	lesaler	
	Contractor		
Ø2 1/2"		eer	
[64mm] Hot	N		
Cast Spout w/ 0.5 GPM [1.9 L/min] VR Non-Aerated			
	nperature Mixing Handle	5" [127mm]	
	Color Coded Index otional Plug Included to	[12711111]	
Internal Above Deals Re	place Handle When mperature is Preset)		<u> </u>
Electronics w/ Flow	,		6 3/8"
Control Setting Switches. Powered w/ 6 VDC	_	1/16" 28mm	[163mm]
Lithium Battery. Mounting	L		
Removable Surface	<u> </u>		
Anti-Rotation Pin 13/16	1 1	1/2"	
[21mm		_ / _	
		imum /	
	I NICK	kness /	0
		⊂Shownˈ w/ ⊍ Plug Instal	Optional led When
	-19" [483mm] Flexible	Water Tem is Preset (I	nperature
	Stainless Steel Supply Hoses	13 1716361 (1	included)
	110000		
Optional 100-240 VAC	-1/2" NPSM Swivel Ends		
Optional 100-240 VAC Adapter w/ 71" [1800mm]	w/ Filter Washers		
Power Cord	-Check Valve Adapters w/ 3/8" Compression (9/16-24 UN) Inlets		
Rough-In Requirement:			
\emptyset 1 1/4" [32mm] Mounting Hole \emptyset 3/16" [5mm] Anti-Rotation Pin Hole (Optional)			
Product Specifications:	F	Product Compliance:	

Drawn: DMH Checked: JRM Approved: JHB Date: 11/22/16 Scale: 1:6

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Cast Spout w/ VR Aerator, 0.5 GPM VR Spray Device,

Point-of-Use Temp. Control, Battery or AC Adapter Powered, 19" Flexible Stainless Steel Supply Hoses & 3/8" Compression Inlets




T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.


EC-3142-VF05


Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



ITEM NO.	SALES NO.	DESCRIPTION
1	B-0199-08-N05	VR 0.5 GPM Non-Aerated Spray Device, 13/16-27 UN Male w/ Key
2	019087-45	6 VDC Lithium Battery, CR-P2
3	019088-45	Auxiliary Power Connector Cable
4	019082-45	Lever Am & Body Screw Kit w/ L-Key
5	018544-45	Flexible Stainless Steel Hose w/ Check Valve Adapter
6	5EF-0002	A/C Transformer
7	019086-45	Body Plug, Pre-Set Temperature

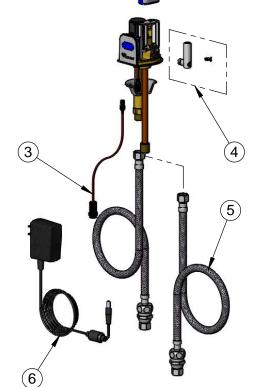



A maximum of (8) ChekPoint faucets can be powered by EC-HARDWIRE ChekPoint Hardwire AC Transformer when connected using EC-ADEWIRE cables. (Both sold separately)





Optional Plug Replaces Lever Handle When Pre-setting Temperature (Installs from Inside of Body) 015425-45 VR Aerator Key 018543-45 Torx T-20 VR L-Key

Flow Control Switches are Located Behind the Sensor. Remove Battery to Access Switches.

- * Switches are set to DEFAULT position:
 - Auto Time Out = 15 seconds
 - Shut Off Delay = 1 second
 - Auto Flush = ÓFF
- * Available Water Flow Control Selections:
 - Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
 - Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec
 - Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

Product Specifications:

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Cast Spout w/ VR Aerator, 0.5 GPM VR Spray Device, Point-of-Use Temp. Control, Battery or AC Adapter Powered, 19" Flexible Stainless Steel Supply Hoses & 3/8" Compression Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: DMH Checked: JRM Approved: JHB Date: 11/22/16 Scale: NTS Sheet: 2 of 2