

LL-IN			

RIS-1D-S1-HC





- **3 Year Parts & Labor Warranty Plus An Additional 4 Year Compressor Warranty**
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)

OPTIONS & ACCESSORIES

- Secure-Temp[™] Technology
- Exterior Laminate
- Stainless Steel Back
- Stainless Steel Exterior Floor (base) • Door Swing Orientation (at time of order)
- FlexTemp Maintain Between 28°F And 38°F
- · Correctional Facilities Option

- Stay-Open Door Feature For Easy Product Loading
- Low Profile Vertical Door Handle

Heavy-Duty Cylinder Lock Stainless Steel Interior Door Liner Adjustable Door Wiper Gasket

- **Hinged Front Shroud**
- Energy Saving Thermal Breaker With Stainless Steel Breaker Caps
- Accepts Cart: 26 1/2"W x 25 1/2"D x 65"H (cart not included)

PROJECT: _____

ITEM # ____

AIA #

CABINET CONSTRUCTION

Stainless Steel Exterior Aluminum Interior Heavy-Duty Cam Hinges

MODEL #

QTY:

SIS #

8' Cord And Plug (see electrical data for details)

Heavy-Duty 20 Gauge Stainless Steel Door

One-Piece, Snap-In Magnetic Door Gasket

FEATURES

- Full Electronic Control With Touchpoint Interface
- Expansion Valve Technology
- **One Touch Defrost**
- Manager's Lockout Feature
- High Performance, Balanced, Top-Mounted Refrigeration
- Anti-Condensate Perimeter Heater

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All **Environmental Concerns**
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More **Consistent Product Temperatures**
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



Please verify qualifying units by visiting: www.energystar.gov/cfs




ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com

3779 Champion Blvd, Winston-Salem, NC 27105

Rev. 9/27/21 Printed in U.S.A.



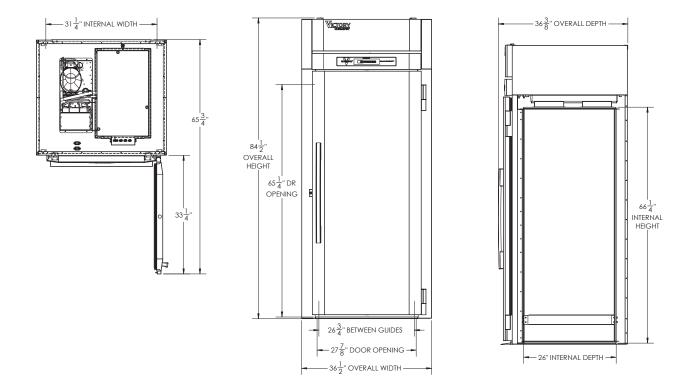

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

Required Clearance:	Top 12",	Rear 3",	Sides 0"

CHARACTERISTICS		ELECTRICAL DATA	SHIPPING DETAILS		
Net Capacity (cubic ft.)	34.86	Cabinet Voltage	115/60/1	Height	88″
Width, Overall (in.)	36 1/2″	Total Amperes	6.5	Width	45″
Depth, Overall (with handle)	36 3/8″	NEMA Plug (8' cord)	5-15P	Depth	45″
Height Overall (in.)	84 1/2"	REFRIGERATION DATA		Crated Weight	476 lbs
Depth, Door Open 90°	65 3/4"	Condensing Unit Size, HP	1/3		
Door Opening (in.)	27 7/8" x 65 1/4"	Refrigerant	R-290]	
No. Of Doors	1	Capacity (BTU/HR) (100°F/20°F)	2800]	
		Heat Rejection (BTU/HR)	4200		
		Charge (Ibs/grams)	0.2866/130		

 3779 Champion Blvd, Winston-Salem, NC 27105

 ph: (888) 845-9800 | fax: (800) 253-5168

 Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

 Rev. 9/27/21 Printed in U.S.A.

an Ali Group Company

