

Project:

Item Number:

Quantity:

Signature Server® NSF7 Refrigerated Stations with Stainless Steel Counters





STANDARD FEATURES

- Holds food temperatures between 33°F and 41°F (0.6°C and 5°C)
- Reinforced stainless steel unibody construction provides extra durability in a lightweight, mobile base
- Base is 18-gauge 400 series stainless steel with applied black laminate
- Top is one-piece 18-gauge 300 series stainless steel
- Recessed display well constructed of 18gauge 300 series stainless steel
- Refrigeration coils surround sides of recess and display well
- Uses R513A, a non-flammable low Global Warming Potential (GWP) refrigerant
- Foamed-in-place polyurethane insulation
- 1" (2.5 cm) drain standard
- Drain hose and valve on operator side of
- Heavy-duty 4" (10 cm) swivel casters with brakes
- 8 ft. (2.4 m) cord

Note: Signature Server® equipment orders cannot be canceled or returned.

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

Approvals	Date

BASE

OPTIONS

□Black Laminate (Standard)

□Matte Laminate. Specify manufacturer/color:

■Wood Grain. Specify manufacturer/color:

□Stainless Steel

□Food Word Wrap □Food Images Wrap □Bubbles Wrap □Checkerboard Wrap

□Toe Kick

□Electrical Outlet

□Line Locks

COUNTERTOP

□18 Ga Stainless Steel (Standard)

□14 Ga Stainless Steel

□Textured Stainless Steel

BREATH GUARD

See Breath Guard Spec Sheet.

For Stainless Steel Countertops Only

Traditional Style	
□Access [®] - Non-Adjustable	□NSF □Stnd
□Access [®] - Adjustable	□NSF □Stnd
□Classic Economy Buffet	□NSF □Stnd
□Classic Cafeteria, Dbl. Shelf	□NSF □Stnd
□Classic Cafeteria, Single Shelf	□NSF□Stnd

□NSF □Stnd
□NSF □Stnd
□NSF □Stnd
□NSF □Stnd
□NSF □Stnd

Progressive Style

□Double-Sided Buffet	□NSF □Stnd
□Single-Sided Buffet w/ Shelf	□NSF □Stnd
□Single-Sided Buffet	□NSF □Stnd
□Cafeteria with Top Shelf	□NSF □Stnd

NSF □Stnd
NSF □Stnd
NSF □Stnd
NSF □Stnd

ITEMS

	Item No.	Width	Height
	37046	46" (117 cm)	34" (86 cm)
	36146	40 (117 (111)	30" (76 cm)
	37066	60" (152 cm)	34" (86 cm)
	36166	00 (132 (111)	30" (76 cm)
	37076	74" (188 cm)	34" (86 cm)
	36176	74 (100 (111)	30" (76 cm)
	98710	88" (224 cm)	34" (86 cm)

BREATH GUARD COLOR

Progressive and Traditional

□Gray Hammer (Progressive Only) □Aluminum (Traditional Only) □Chrome □ Brass Powder Coat □Blk. 80% Gloss □ Blk. Hammer Semi-Gloss

Progressive and Traditional (Cont.)

□White Hammer □Copper Vein □Silver Vein □Black/White

Contemporary

□Brushed □Black 80% Gloss Stainless Steel □Brass Powder Coat

LIGHTING

See Breath Guard Spec Sheet. □Incandescent □Fluorescent □LED

ADDITIONAL CUSTOM OPTIONS

Contact Vollrath Representative.

EXTENDED WARRANTY

Contact Vollrath Representative for details.

ACCESSORIES

See Signature Server Accessories Spec Sheet. Some options require a custom quote.

Plate Rest w/ Mounting Kit (Stainless Steel)

□Customer Side □Plain □Textured □Textured □Operator Side □Plain

Tray Slide, V-rib (Stainless Steel)

□Customer Side □18 Ga □14 Ga □Operator Side □18 Ga □14 Ga

Tray Slide, Tubular (Stainless Steel)

□Customer Side □Operator Side

Cutting Board

■Maple Hardwood □White Poly

End Shelf (Stainless Steel)

□Operator Left □Operator Right □Operator Left and Operator Right

False Bottom

□False Bottom

Storage Module

□With Doors **□Without Doors** Bag in Box □Stainless Steel ■With Doors □Galvanized **□Without Doors**


Stationary Legs

□Adjustable 4-5" □Adjustable 6-7"


Due to continued product improvement, please consult www.vollrath.com for current product specifications.


Signature Server® NSF7 Refrigerated Stations with Stainless Steel Counters

DIMENSIONS (Shown in inches (cm))

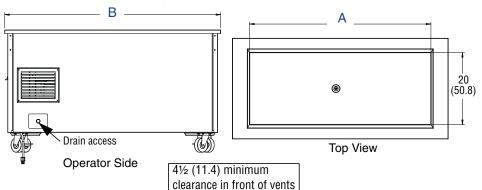

Item No.	(A) Pan Width	(B) Overall Width	(C) Height
37046	37%	46	34 (86)
36146	(95.5)	(117)	30 (76)
37066	50%	60	34 (86)
36166	(127.9)	(152)	30 (76)
37076	631/8	74	34 (86)
36176	(160.3)	(188)	30 (76)
98710	75% (192.7)	88 (224)	34 (86)





Note: For breath guard and accessory dimensions, see the breath guard and accessory spec sheets on vollrath.com

SPECIFICATIONS

Overall Width IN (CM)	Base Unit Voltage	Comp (HP)	Peak Heat of Rejection (BTUH)	Refrig. Charge (OZ)	Lighting	Total Amps	Plug
46		4/5			Fluorescent	4.1	
(117)					Incandescent	4.4	
(117)	60 (152) 74 (188)		2000	7	None	3.8	
00		1/5	2800	7	Fluorescent	8.1	
					Incandescent	8.6	
					None	7.8	NEMA
7.4		1/3	4800	7.5	Fluorescent	8.1	5-15P
					Incandescent	8.8	
(100)					None	7.8	
88		1/	1/3	4000		Fluorescent	8.1
(224)				8	Incandescent	8.8]
(224)					None	7.8	



[] []w **NEMA** 5-15R



www.vollrath.com

The Vollrath Company, L.L.C.

1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851

Main Fax: 800.752.5620 or 920.459.6573 Customer Service: 800.628.0830

Technical Services techservicereps@vollrathco.com Induction Products: 800.825.6036 **Countertop Warming Products:**

800.354.1970

All Other Products: 800.628.0832

© 2019 The Vollrath Company L.L.C.

Form Number L36196

12/9/19