

PROJECT:	
ITEM #	
MODEL #	

SIS #

_ QTY:

AIA

UNDERCOUNTER FREEZER WITH DRAWERS

VUFD36HC-2





CABINET CONSTRUCTION

- · Stainless Steel Exterior (galvanized back and bottom)
- Aluminum Interior
- Stainless Steel 20 Gauge Drawers
- One Piece, Snap-In Magnetic Drawer Gaskets
- 6" Casters Two With Brakes
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control
- Stay-Open Door Feature For Easy Product Loading
- Low Profile Horizontal Drawer Handles
- Heavy-Duty Pan Supports Provided
- Drawers Accommodate 6" Deep Full Size Food Service Pans In Both Upper And Lower Drawers (pans not included)
- Telescoping Drawer Slides With Locking Mechanism

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- **Rear Mounted Refrigeration System**
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Freezer Capable Of Maintaining Product Temperature -10°F



- Casters: 3", Roller Kit, Low Profile
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

- **3 Year Parts & Labor Warranty**
- **Plus An Additional 4 Year Compressor Warranty**
- Exclusive 2 Year Warranty On Magnetic Drawer Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)

OPTIONS & ACCESSORIES


- · Stainless Steel Interior
- Stainless Steel Back
- Secure-Temp[™] Technology
- · Cutting Board
- Drawer Locks
- 6" Legs Or 6" Seismic Legs

NDERCOUNTER ER WITH DRAWERS

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com ICTORY. UNDERCOUNTER FREEZER WITH DRAWERS

VUFD36HC-2

ULTRASPEC

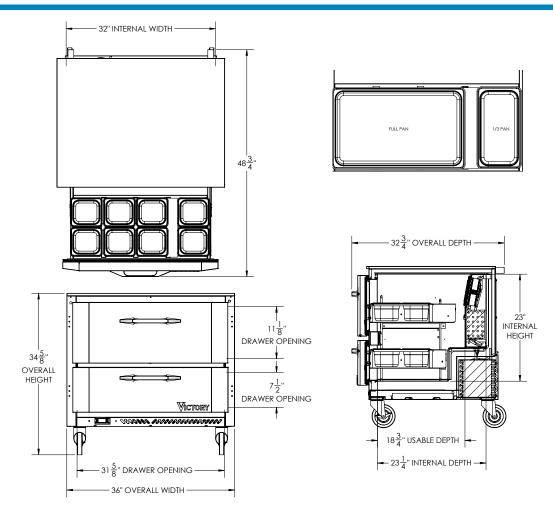

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS ELECTRICAL DATA		SHIPPING DETAILS		ILS	
Net Capacity (cubic ft.)	8.69	Cabinet Voltage	115/60/1	Height	34″
Width, Overall (in.)	36″	Total Amperes	6.0	Width	37″
Depth, Overall (with handle)	32 3/4″	NEMA Plug (8' cord)	5-15P	Depth	32″
Height Overall (6" casters)	34 5/8"	REFRIGERATION DATA		Crated Weight	237 lbs
Depth, Drawer Open 90°	48 3/4"	Condensing Unit Size, HP	1/2	*NOTE: Remote units are field wired and comes with 6' legs. Refrigerant must be specified at time of order.	
Drawer Openings (in.)	31 5/8" x 7 1/2" 31 5/8" x 11 1/8"	Refrigerant*	R-290		
No. Of Drawers	2	Capacity (BTU/HR) (100°F/20°F)	1865		
		Heat Rejection (BTU/HR)	2797.5		
		Charge (lbs/grams)	0.165/75		

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 11/2/21 Printed in U.S.A.

an Ali Group Company

