ZER WITH DRAWER



UNDERCOUNTER FREEZER WITH DRAWERS

VUFD60HC-2















CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back and bottom)
- **Aluminum Interior**
- Stainless Steel 20 Gauge Door/Drawers
- · One Piece, Snap-In Magnetic Door/Drawer Gaskets
- · 6" Casters Two With Brakes
- · 8' Cord And Plug (see electrical data for details)

FEATURES

- · Full Electronic Control
- · Stay-Open Door Feature For Easy Product Loading
- · Heavy-Duty Spring Loaded Cartridge Hinges
- · Heavy-Duty Pan Supports Provided
- Drawers Accommodate 6" Deep Full Size Food Service Pans In Both Upper And Lower Drawers (pans not included)
- Telescoping Drawer Slides With Locking Mechanism
- · Low Profile Horizontal Door/Drawer Handles
- · Epoxy Coated Shelves (2 per section)

3 Year Parts & Labor Warranty

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Rear Mounted Refrigeration System
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Freezer Capable Of Maintaining Product Temperature -10°F

Please verify qualifying units by visiting: www.energystar.gov/cfs

- Plus An Additional 4 Year Compressor Wa<u>rranty</u>
- Exclusive 2 Year Warranty On Magnetic Door/Drawer Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)

OPTIONS & ACCESSORIES

- · Stainless Steel Interior
- · Stainless Steel Back
- Secure-Temp™ Technology
- Door/Drawer Locks


- · Cutting Board
- · Additional Shelves
- · Shelf Clips (set of 4)
- Door Swing Orientation (at time of order)
- · 6" Legs Or 6" Seismic Legs
- · Casters: 3", Roller Kit, Low Profile
- Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

3779 Champion	Blvd, \	Winston-Sa	lem, NC	2710

ph: (888) 845-9800 fax: (800) 253-5168

Rev 11/2/21 Printed in U.S.A. APPROVAL: ___ DATE: _



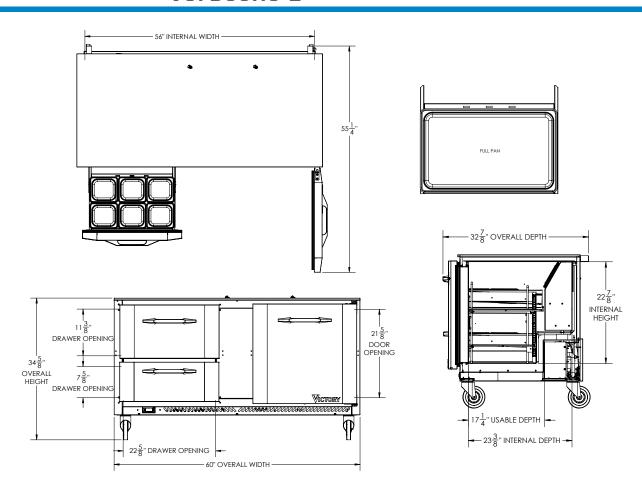

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS		
Net Capacity (cubic ft.)	14.39	Cabinet Voltage	115/60/1	Height	48"	
Width, Overall (in.)	60"	Total Amperes	7.0	Width	63"	
Depth, Overall (with handle)	32 7/8"	NEMA Plug (8' cord)	5-15P	Depth	37"	
Height Overall (6" casters)	34 5/8"	REFRIGERATION DATA	Crated Weight	359 lbs		
Depth, Door Open 90°	55 1/4"	Condensing Unit Size, HP	1/2	·		
Door Opening (in.)	22 5/8" x 21 5/8"	Refrigerant*	R-290	*NOTE Describe on the case field		
Drawer Openings (in.)	22 5/8" x 7 5/8" 22 5/8" x 11 3/8"	Capacity (BTU/HR) (100°F/20°F)	1865	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.		
No. Of Door/Shelves/Drawers	1/2/2	Heat Rejection (BTU/HR)	2797.5			
		Charge (lbs/grams)	0.165/75			

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 11/2/21 Printed in U.S.A.

