VICTORY

PROJECT:		
ITEM #		_ QTY:
MODEL #		
AIA #	CIC #	

WORKTOP DRAWER FREEZER

VWFD60HC-2





CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back & bottom)
- Aluminum Interior
- 4" High, Foamed-In-Place Backsplash
- One Piece, Snap-In Magnetic Door/Drawer Gaskets
- 6" Casters
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control
- Stay-Open Drawer Feature For Easy Product Loading
- Low Profile Horizontal Door/Drawer Handles
- Heavy-Duty Spring Loaded Cartridge Hinges
- Heavy-Duty Pan Supports Provided
- Drawers Accommodate 6" Deep Full Size Food Service Pans (pans not included)
- Telescoping Drawer Slides With Locking Mechanism
- Epoxy Coated Shelves (2 per section)

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Rear Mounted Refrigeration System
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Freezer Capable Of Maintaining Product Temperature -10°F

Please verify qualifying units by visiting: www.energystar.gov/cfs

- 3 Year Parts & Labor Warranty Plus An Additional 4 Year Compressor Warranty
- Exclusive 2 Year Warranty On Magnetic Drawer Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)

OPTIONS & ACCESSORIES

- Stainless Steel Interior
- Stainless Steel Back
- Secure-Temp™ Technology
- Door/Drawer Locks

- Cutting Board
- Additional Shelves
- Shelf Clips (set of 4)
- Door Swing Orientation (at time of order)
- 6" Legs or 6" Seismic Legs
- Casters: 3", Roller Kit, Low Profile
- Correctional Package
- Remote Models* (6" legs only)
 (refrigerant must be specified at time of order,
 see note on back on page)

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 fax: (800) 253-5168


Sales@VictoryRefrigeration.com VictoryRefrigeration.com

APPROVAL: __

NORKTOP DRAWER FREEZER

VINCTORY WORKTOP DRAWER FREEZER

VWFD60HC-2

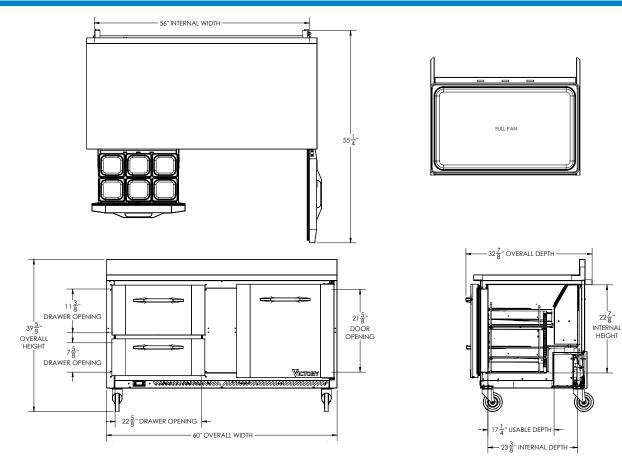

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS		
Net Capacity (cubic ft.)	14.39	Cabinet Voltage	115/60/1	Height	49"	
Width, Overall (in.)	60″	Total Amperes	7.0	Width	65″	
Depth, Overall (with handle)	32 7/8"	NEMA Plug (8' cord)	5-15P	Depth	37″	
Height Overall (6" casters)	39 5/8″	REFRIGERATION DATA		Crated Weight	398 lbs	
Depth, Door Open 90°	55 1/4"	Condensing Unit Size, HP	1/2			
Door Opening (in.)	22 5/8" x 21 5/8"	Refrigerant*	R-290	*NOTE: Remote units are field wired and comes with 6' legs. Refrigerant must be specified at time of order.		
Drawer Opening (in.)	22 5/8" x 7 5/8" 22 5/8" x 11 3/8"	Capacity (BTU/HR) (100°F/20°F)	1865			
No. Of Doors/Shelves/Drawers	1/2/2	Heat Rejection (BTU/HR)	2797.5			
		Charge (lbs/grams)	0.165/75			

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/27/21 Printed in U.S.A.

an Ali Group Company

