

| PROJECT: | |
|----------|------|
| ITEM # | QTY: |
| MODEL # | |
| | |

WORKTOP DRAWER REFRIGERATOR

VWRD119HC-4





CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back & bottom)
- Aluminum Interior
- 20 Gauge Stainless Steel Door/Drawer
- 4" High, Foamed-In-Place Backsplash
- One Piece, Snap-In Magnetic Door/Drawer Gaskets
- 6" Casters, Two With Brakes
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control
- Stay-Open Drawer Feature For Easy Product Loading
- Low Profile Horizontal Door/Drawer Handles
- Heavy-Duty Spring Loaded Cartridge Hinges
- Heavy-Duty Pan Supports Provided
- Drawers Accommodate 6" Deep Full Size Food Service Pans (pans not included)
- Telescoping Drawer Slides With Locking Mechanism
- Epoxy Coated Shelves (2 per section)

3 Year Parts & Labor Warranty

- Plus An Additional 4 Year Compressor Warranty Exclusive 2 Year Warranty On Magnetic Drawer Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)
- Lifetime Wurrunty on Hundles & Hinges (parts

OPTIONS & ACCESSORIES

- Stainless Steel Interior
- Stainless Steel Back
- Secure-Temp™ Technology
- Door/Drawer Locks

- Cutting Board
- Additional Shelves
- Shelf Clips
- 6" Legs or 6" Seismic Legs
- Casters: 3", Roller Kit, Low Profile

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Rear Mounted Refrigeration System
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- + Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



- Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)


Sales@VictoryRefrigeration.com VictoryRefrigeration.com


Door Swing Orientation (at time of order)


3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

APPROVAL: ____

VICTORY WORKTOP DRAWER REFRIGERATOR VWRD119HC-4

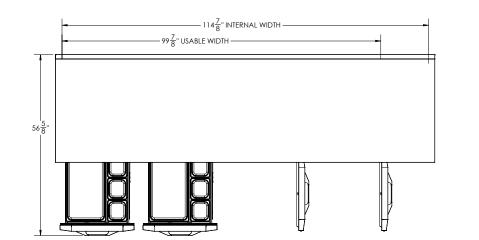



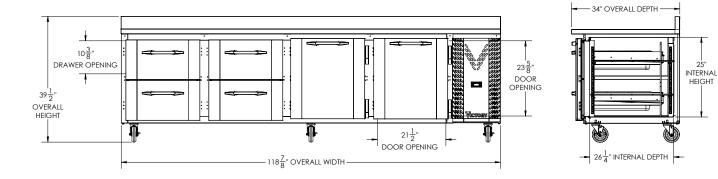

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

| CHARACTERISTICS | | ELECTRICAL DATA | | SHIPPING DETAILS | |
|------------------------------|-------------------|--------------------------------|------------|--|---------|
| Net Capacity (cubic ft.) | 40.12 | Cabinet Voltage | 115/60/1 | Height | 44" |
| Width, Overall (in.) | 118 7/8" | Total Amperes | 5.0 | Width | 122″ |
| Depth, Overall (with handle) | 34" | NEMA Plug (8' cord) | 5-15P | Depth | 35″ |
| Height Overall (6" casters) | 39 1/2" | REFRIGERATION DATA | | Crated Weight | 722 lbs |
| Depth, Drawer Open 90° | 56 5/8" | Condensing Unit Size, HP | 1/3 | *NOTE: Remote units are field wired and comes with 6' legs. Refrigerant must be specified at time of order. | |
| Door Opening (in.) | 211/2" x 235/8" | Refrigerant* | R-290 | | |
| Drawer Opening (in.) | 21 1/2" x 10 3/8" | Capacity (BTU/HR) (100°F/20°F) | 2630 | | |
| No. Of Doors/Shelves/Drawers | 2/4/4 | Heat Rejection (BTU/HR) | 3945 | | |
| | | Charge (lbs/grams) | 0.3086/140 | | |

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/28/21 Printed in U.S.A.

an Ali Group Company

