



# Models: NGGD-24M / NGGD-36M / NGGD-48M

The Spectrum Gas Griddles are designed with durable stainless steel construction and cool-touch front plate rail.

These units are equipped with infinite heat controls, high-performance burners, and removable grease drawer.

Includes an LP conversion kit.

#### Standard Features

- ◆ High performance burners, each with output of 30,000 BTU
- Infinite heat controls
- 5" wide cool-touch stainless steel front plate rail provides safety and knob protection
- Stainless steel insulated double-wall body, adjustable legs 4" to 6" and grease drawer with weep hole and baffle; non-skid feet
- 3/4" polished steel griddle plate with side and back splash guard
- ♦ 3-1/2" full width grease trough
- Standing pilot ignition system, one per burner
- ♦ 3/4" rear gas connection with regulator
- Conversion kit allows the use of propane or natural gas
- CSA listed for commercial and indoor use
- One year parts and labor warranty

## **Models**

## NGGD-24M

Burners: 2 BTU/total per HR: 60,000 Griddle surface: 24" x 20-3/4"

#### NGGD-36M

Burners: 3 BTU/total per HR: 90,000 Griddle surface: 36" x 20-3/4"

# NGGD-48M

Burners: 4
BTU/total per HR: 120,000
Griddle surface: 48" x 20-3/4"

Project _	
Item #	
Ougntity	











#### **Accessories**

## **GRILL SCRAPERS**


SCRP-14 16" Heavy-duty aluminum grill scraper SCRP-16 16" Aluminum grill scraper

SCRP-12 12" Aluminum grill scraper

# **GRIDDLE CLEANERS**

GSH-1 Griddle Screen Holder
GSN-4 Grill Screen, fits with GSH-1
GBH-2 Griddle Brick Holder
GBK-348 Grill brick, fits with GBH-2



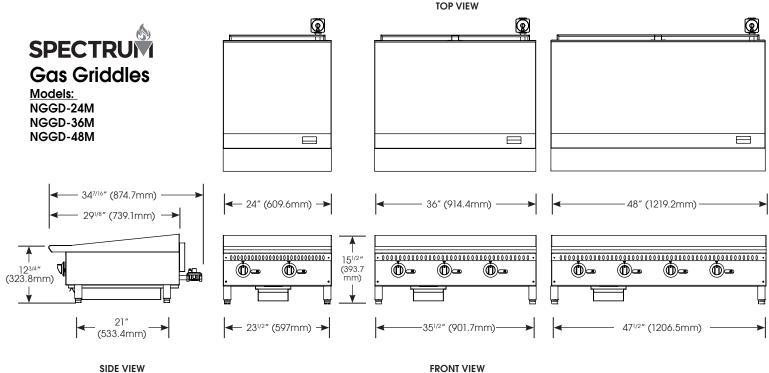

# **Specifications**

MODEL	DESCRIPTION	# OF BTU/BURNER	TOTAL	PRESSURE	DIMENSIONS		GRIDDLE SURFACE		SHIP		
IVIODEL			BURNER	BTU/HR	IN. W.C.	LENGTH	DEPTH	HEIGHT	LENGTH	DEPTH	WEIGHT
NGGD-24M	Spootrum Can	2		60,000		24" (609.6mm)	34-7/16" (87.3mm) includes gas inlet pipe at	15-1/2" (393.7mm)	24" (609.6mm)	20-3/4"	196 lbs (89 kg)
NGGD-36M		3	30,000	90,000	90,000 4" / 10"	36" (914.4mm)			36" (914.4mm)		284 lbs (129 kg)
NGGD-48M		4		120,000		48" (1219.2mm)	rear		48" (1219.2mm)		355 lbs (161 kg)

# Gas Requirements and Information

- Natural or LP gas main supply required
- 3/4" NPT male connection, all units supplied with natural gas and convertible LP gas regulator

# THESE UNITS ARE SUITABLE FOR INSTALLATION ON NON-COMBUSTIBLE SURFACE(S) ONLY.

Combustible clearances: 6" sides (152mm) / 6" rear (152mm) / 4" floor (102mm)

Noncombustible clearances: 0" sides (0mm) / 6" rear (152mm) / 4" floor (102mm)

## Product Specs Gas Griddles

The Gas Griddle models NGGD-24M / NGGD-36M / NGGD-48M as manufactured by Winco®, Lodi, NJ 07644.

The Gas Griddle shall be rated at 30,000 BTU per burner, 3/4" rear gas connection with regulator and overall height from 13-1/2" to 15-1/2". The Gas Griddle shall consist of 3/4" polished steel griddle plate with side and back splash guard, two (2) / three (3) / four (4) burners, standing pilot ignition system, stainless steel insulated body, grease drawer with weep hole and baffle. Natural gas supplied standard, conversion kit included for LP.

Not to be used on casters.

CSA listed for commercial and indoor use

Warranty consists of one year parts and labor.

# Winco®, DWL International Trading, LLC

www.wincous.com equipsales@wincous.com **East Coast:** 65 Industrial Road, Lodi, NJ 07644 Tel. 1.888.946.2682 | Fax: 1.888.946.2632 **West Coast:** 14950-14952 Valley View Avenue, La Mirada, CA 90638 Tel. 1.888.946.2652 | Fax: 1.562.926.5678